

Leaded Ferrite Bead

ALFB-01



RoHS / RoHS II Compliant



Φ3.50 x 4.70mm

FEATURES:

- Ferrite core construction
- Substantial EMI suppression over a wide frequency range
- RoHS compliant and Pb free

APPLICATIONS:

- Noise suppression for computers and peripheral devices, DVD players, cameras, camcorders, LED TVs, communication equipments, OA equipments, etc
- Reduces noise in ultra high speed circuits as well

STANDARD SPECIFICATIONS:

Operating Temperature: -40°C ~ + 85°C

Storage Temperature: -40°C ~ +85°C


Impedance	Test Frequency	Rated Current
Ω Min	MHz	A Max
65	25	5
110	100	

Test Conditions

Instrument: Agilent 4294A Precision Impedance Analyzer


ELECTRICAL CHARACTERISTICS

Typical Impedance v.s. Frequency Curve

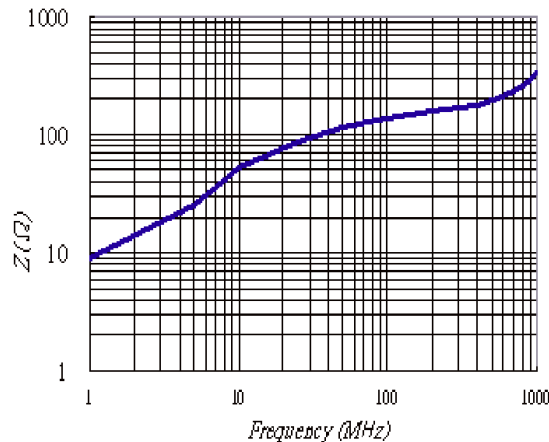

OPTIONS AND PART IDENTIFICATION:

Packing: Bulk (1,000pcs / bag)

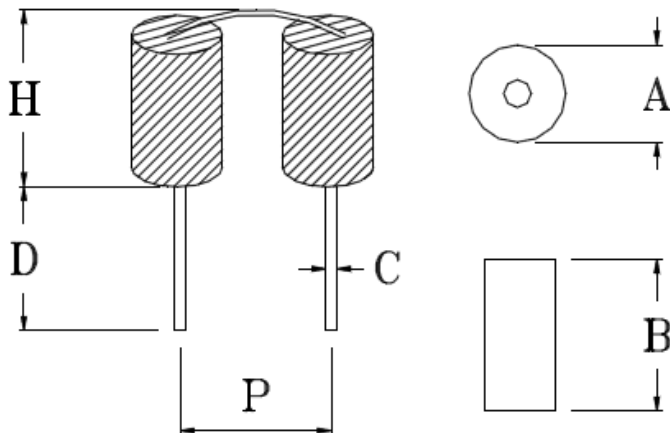

A	B	C	D	H	P
3.5±0.2	4.7±0.3	0.60±0.05	4.0±0.5	7.50 max	5.0±0.5

Dimension: mm

ABRACON IS
ISO 9001:2008
CERTIFIED



Visit www.abracon.com for Terms & Conditions of Sale **Revised: 10.30.13**
30332 Esperanza, Rancho Santa Margarita, California 92688
tel 949-546-8000 | fax 949-546-8001 | www.abracon.com