
DURACELL®

AA 2500mAh

Nickel Metal Hydride Battery

NiMH



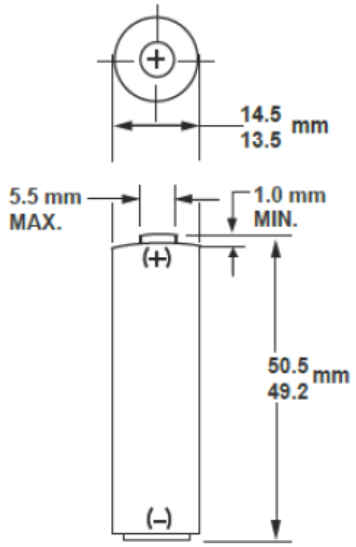

Dimensions shown are IEC standards

Key Features

- High voltage response, stable during most of the lifetime of the application
- Reliable Performance
- Wide operating temperature range (- 10°C / + 50°C)
- Excellent resistance to corrosion
- Designed to meet all major quality, safety and environment standards:
  - Safety: IEC 62133-1 & ANSI C18.2M: Part 2
  - RoHS and REACH compliance
  - Quality: ISO 9001, Duracell World Class Continuous Program

Electrical characteristics

Rated Capacity (ANSI C18.2M, Part 1)	2500 mAh
Nominal voltage (at + 20 °C)	1.2 V
Operating Voltage	1.0V – 1.35V
Typical Impedance @ 1kHz	25 Ohm

Physical characteristics

Typical weight	30 g (1.06oz.)
Typical Volume	8.3 cm^3 (0.50 in^3)

Operating conditions

Operating temperature range	-10°C to 50°C (14°F to 122°F)

Storage

Recommended storage area should be clean, with temperature not exceeding 5°C to 30°C limits, dry and well ventilated.

DURACELL® BATTERIES

Berkshire Corporate Park
Bethel, CT. 06801 U.S.A.
Telephone: Toll-free 1-800-544-5454
www.duracell.com


Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.


DURACELL®


AA 2500mAh

Nickel Metal Hydride Battery

NiMH

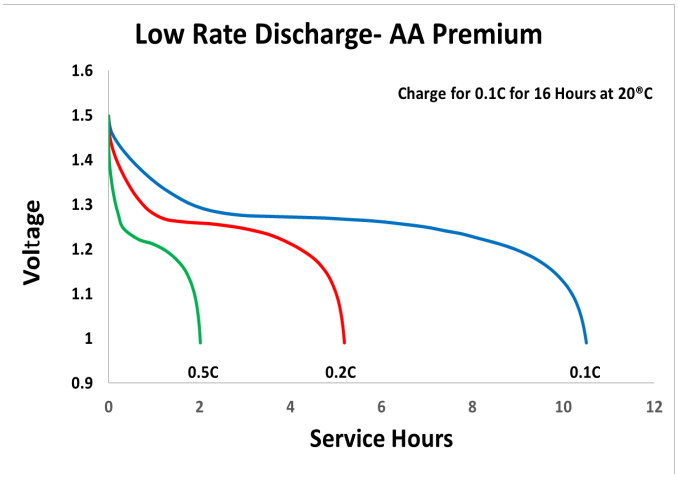

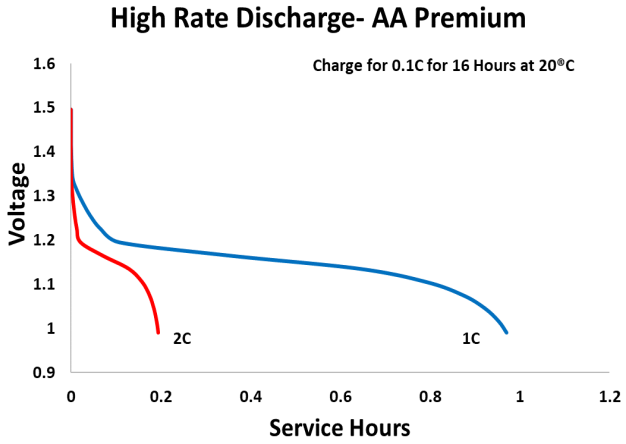

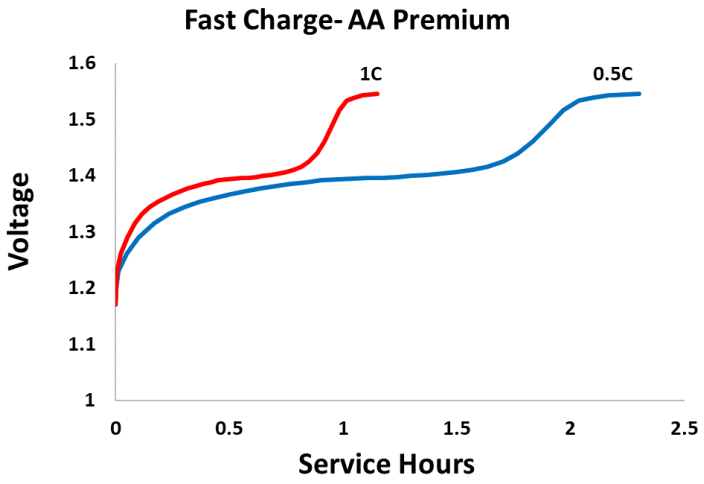

DURACELL® BATTERIES

Berkshire Corporate Park
Bethel, CT. 06801 U.S.A.
Telephone: Toll-free 1-800-544-5454
www.duracell.com

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.