


PRODUCT DATA DRAWING

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
01	PRELIMINARY	02/21	SEE PDM

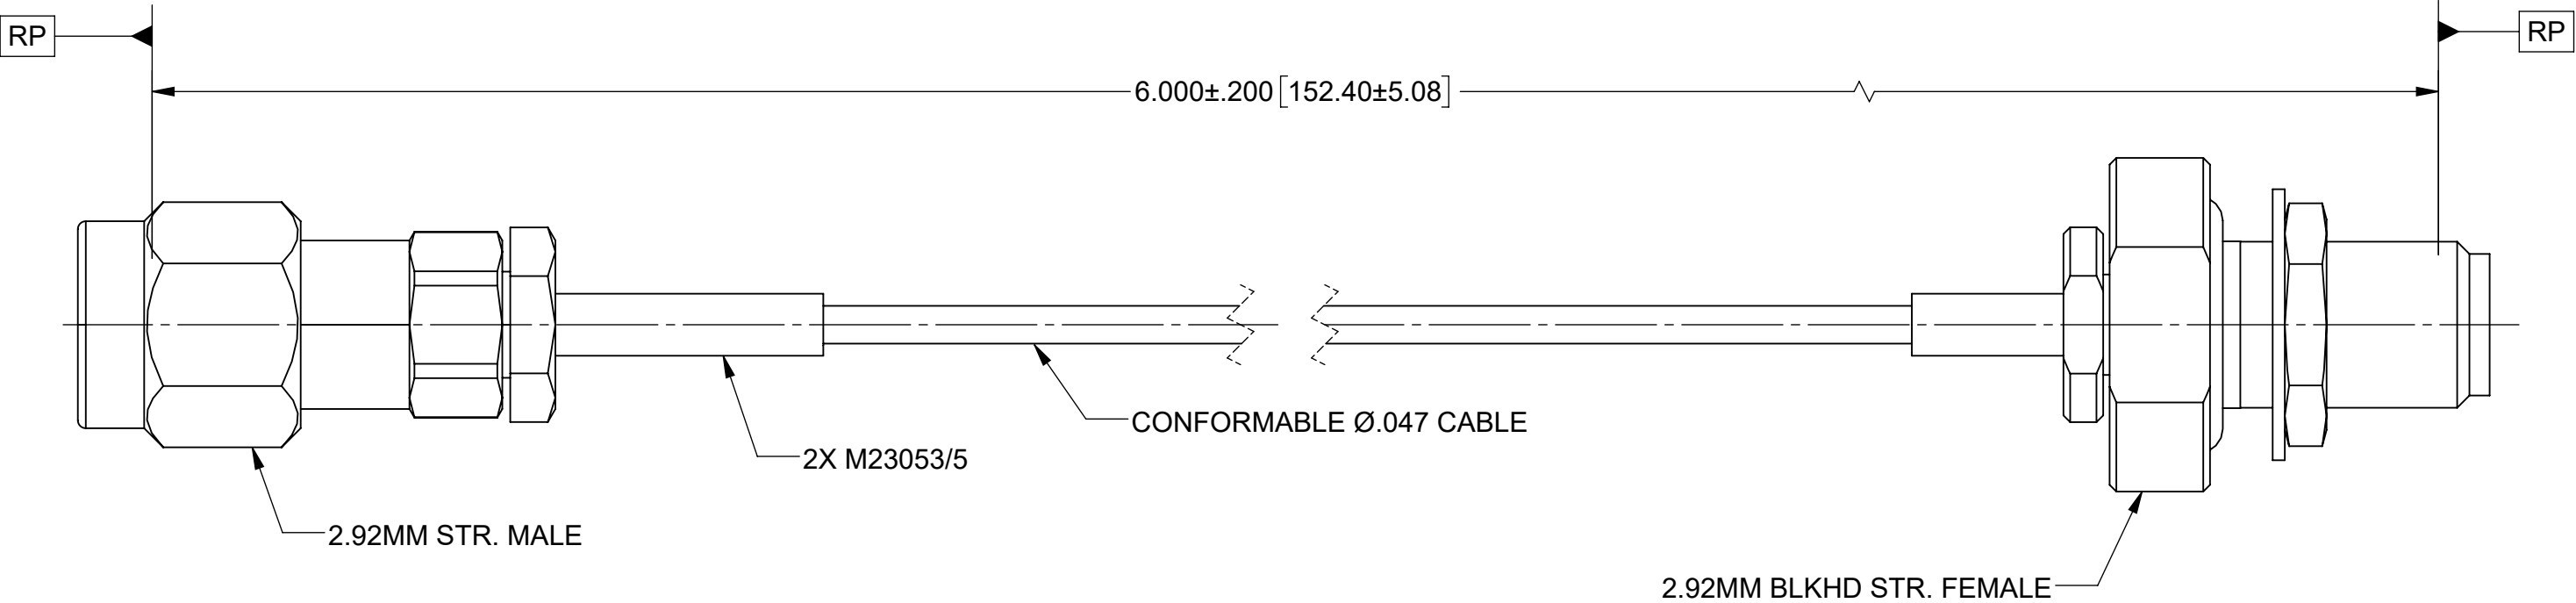

MATERIAL:

- CONNECTORS:
- 2.92MM STR. MALE (SF1511-60069)
2.92MM BULKHEAD STR. FEMALE (SF1521-60045)
- CABLE:
- CONFORMABLE Ø.047 CABLE
- SHRINK TUBING:
- M23053/5

PERFORMANCE:

- IMPEDANCE:
- 50 OHMS
- FREQ. RANGE:
- DC TO 40.0 GHz.
- VSWR:
- 1.40:1 MAX. DC TO 18.0 GHz.
1.60:1 MAX. DC TO 40.0 GHz.
- INSERTION LOSS:
- 2.13dB MAX. DC TO 40.0 GHz.

MATERIAL:	SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: $\pm 1/64$ ANGULAR: X° $\pm 1^{\circ}0'$
-----------	-----------	--