

APPROVED: _____


DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/25/20	
A		ADDED SPEC.	5/19/21	LH/RC

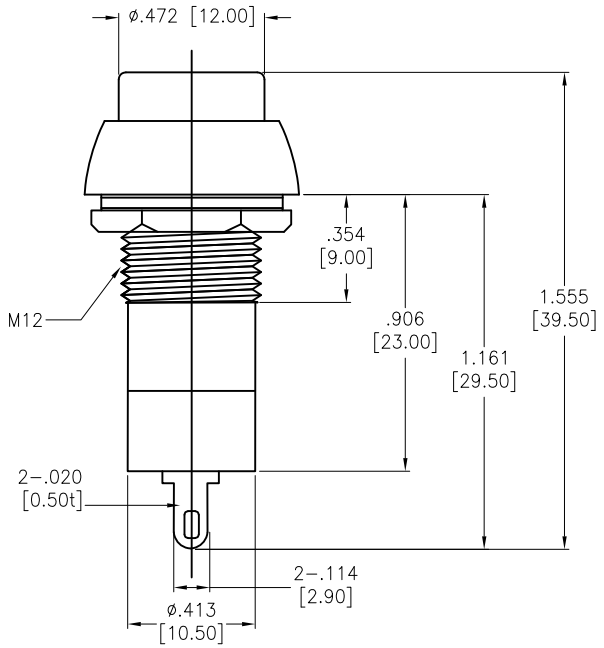





RECOMMENDED PANEL CUT



2P SPST
LATCHING



CIRCUIT DIAGRAM
(SPST)

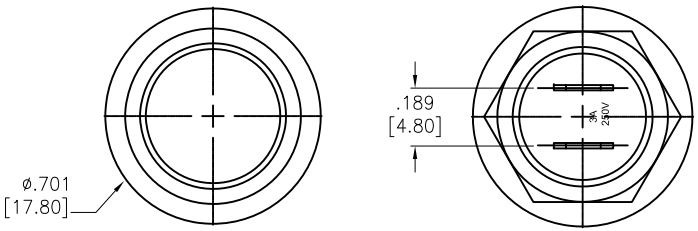

SW–PB1–1XX–A–P1–X

NO.	Button Color
A	Black
B	Blue
C	Green
D	Red
E	White
F	Yellow

SPECIFICATIONS:
Material:
Housing: ABS, rated UL 94V–0
Bottom: PA66
Button: ABS
Contact: Brass, Silver plated
Spring: Spring steel wire
Electrical:
Rating: 3A, 250VAC
Contact resistance: 50 mΩ max
Insulation resistance: 100 Mohms min (500VDC)
Dielectric withstanding voltage: 1500 VAC for 1 minute
Electrical life: 10,000 Cycles min
Temperature Rating:
Operating temperature: –25°C to +85°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

SW–PB1–1XX–A–P1–X
- DZ= ON–OFF Latching
- BS= OFF–ON Momentary

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

DRAWN	OW	11/25/20
CHECKED	AC	11/25/20
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: SWITCH, PLASTIC PUSH BUTTON, SPST SOLDER TYPE

SIZE	PART NO.	REV.
X	SW-PB1-1XX-A-P1-X	-

REF: S00204C | SCALE: NTS | SHEET 1 OF 1