


EPC9174: 40–60 V Input, 10–15 V, 100 A Output Fixed Conversion Ratio 1.2 kW LLC, $\frac{1}{8}$ th Brick Size Module Quick Start Guide

EPC2071 and EPC2066


Revision 1.0

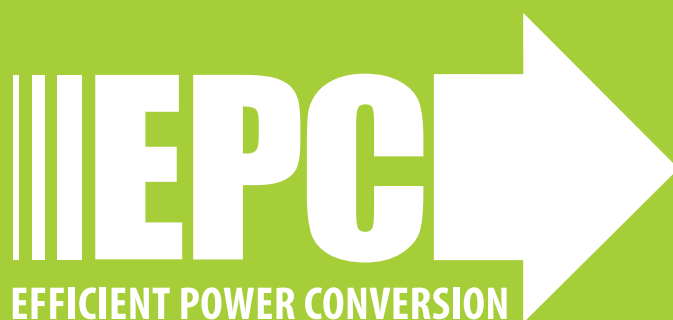

DESCRIPTION

The EPC9174 demonstration board is a 1.2 kW, 48 V input to 12 V output LLC converter that operates as a DC transformer with fixed conversion ratio of 4:1. The simplified schematic diagram is shown in Figure 1. It features the 100 V rated **EPC2071** and 40 V rated **EPC2066** GaN FETs, the uP1966A and LMG1020 gate drivers as well as the Microchip dsPIC33CK32MP102 16-bit digital controller. Other features include:

- Peak efficiency: 97.3 % at 550 W
- Full-load efficiency: 96.3% @ 12 V delivering 100 A output
- 22.9 × 58.4 mm (0.90 × 2.30 inches)
- Low profile: 10 mm total converter thickness without heatsink
- Temperature rise: 72.5°C @ 12 V with 100 A output (with heatsink kit installed)
- Fixed switching frequency: 1 MHz
- Soft startup into full resistive load
- High power density: 1472 W/in³ (excluding pins)

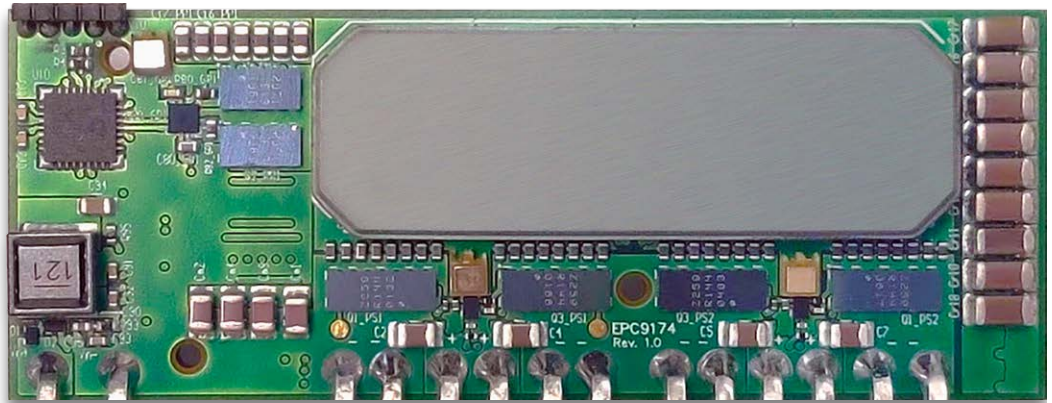

EPC9174 board

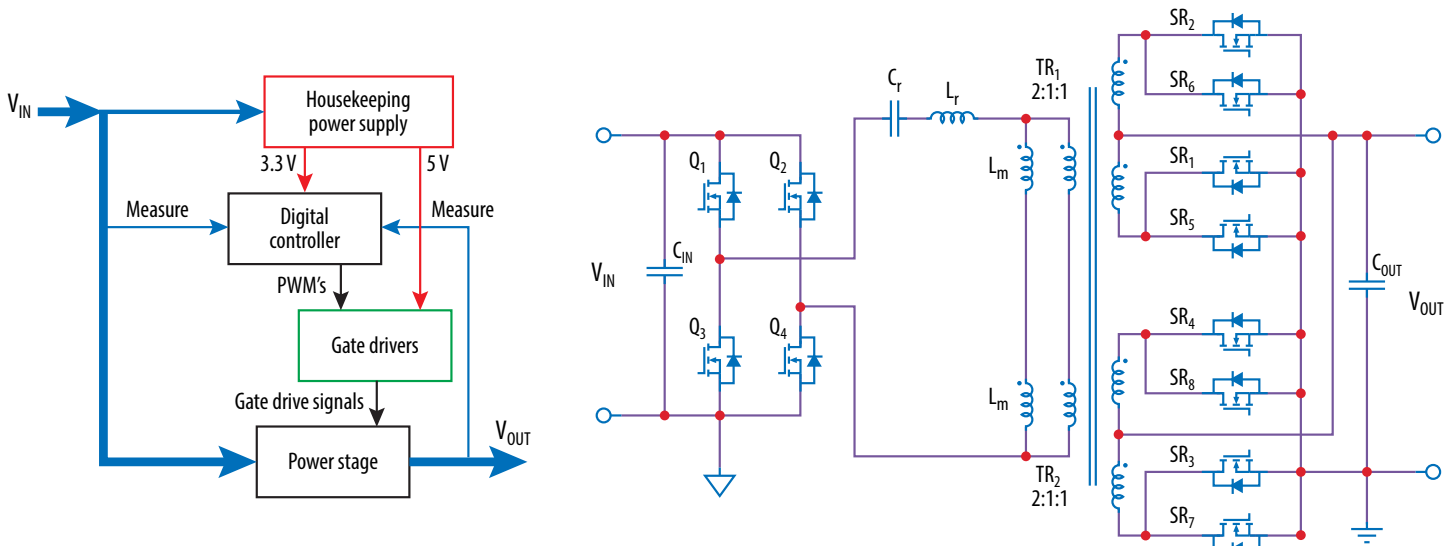


Figure 1: Simplified schematic diagram of the EPC9174 LLC Module

REGULATORY INFORMATION

This converter is intended for evaluation purposes only. It is not a full-featured converter and cannot be used in final products. No EMI test was conducted. It is not FCC approved.

FIRMWARE UPDATES

Every effort has been made to ensure all control features function as specified. It may be necessary to provide updates to the firmware. Please check the EPC website for the latest firmware updates.

Table 1: Electrical Characteristics ($T_a = 25^\circ\text{C}$ unless specified otherwise)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
V_{IN}	Input Voltage		40	48	60	V
V_{OUT}	Output Voltage	Fixed ratio of 4:1 based on V_{IN}		12		
I_{OUT}	Output Current	Continuous*	0		100	A
f_s	Switching Frequency			1		MHz
T_{rise}	Temperature Rise	$V_{IN} = 48\text{ V}$, $I_{OUT} = 100\text{ A}$, thermal system installed, 400 LFM forced air, measured at heat-spreader		72.5		°C
$V_{IN,on}$	Input UVLO turn on voltage			7.5		V
$V_{IN,off}$	Input UVLO turn off voltage			5.5		
$t_{OUT,rise}$	Output voltage rise time			3		ms

* Requires adequate cooling

HIGHLIGHTED PARTS

The EPC9174 features a primary side full bridge and a dual secondary side center tapped half bridge configuration based on EPC2071 and EPC2066 eGaN fets. For more information on the [EPC2071](#) and [EPC2066](#) please refer to the datasheet available from EPC at www.epc-co.com.

Onboard power supply

The EPC9174 board includes logic and gate driver house-keeping power supplies that are powered from the main input supply voltage to the LLC board.

Input and output voltage sense

Input and output voltages are measured by resistor dividers and fed back to the microcontroller to be used for control purposes.

Transformer core

This module uses a customized transformer core with ML91S material from Hitachi metals (part number: U-36-4.57-12.2) which offers low core loss at high frequency operation. The drawing and dimensions of this core is shown in Figure 14. Two half core sections are inserted from top and bottom side of the board as shown in Figure 2 below. Proper spacers are also added in between to achieve the required magnetizing inductance.

MECHANICAL SPECIFICATIONS

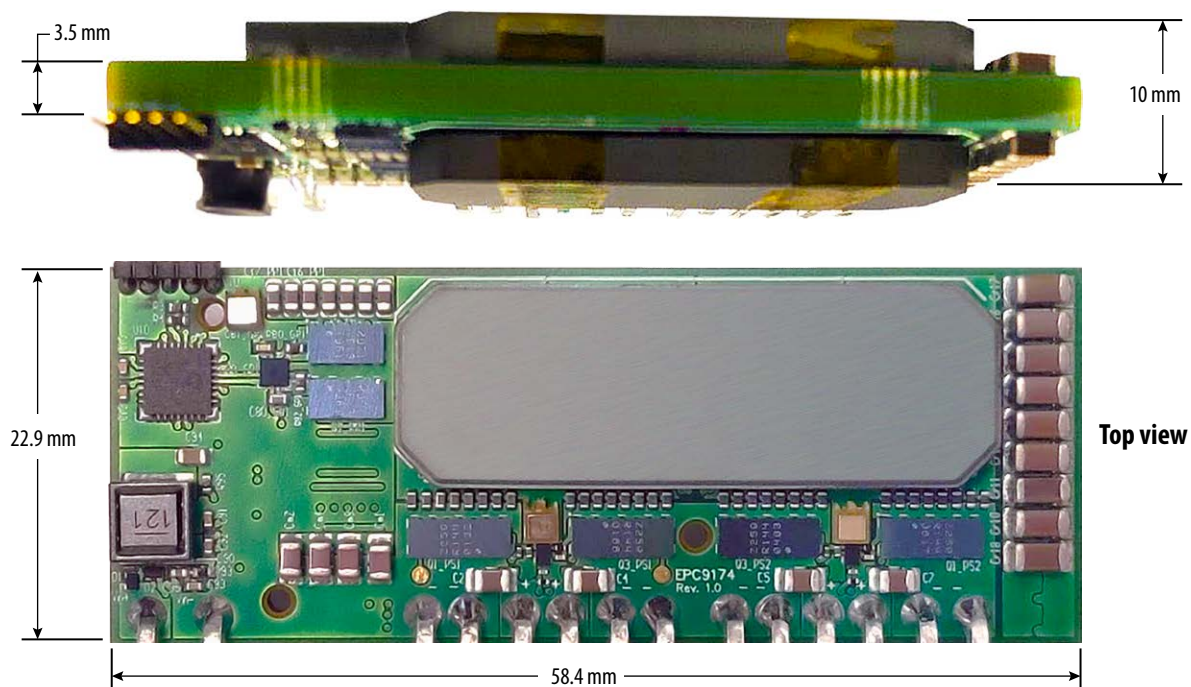


Figure 2: EPC9174 mechanical dimensions

QUICK START PROCEDURE

The EPC9174 LLC converter module is easy to set up for evaluation. Refer to Figures 3-4 and follow the procedure below for proper connection and measurement setup:

1. EPC9533 is the motherboard for EPC9174 where the main input and output power connections are located.
2. Attach the standoffs for EPC9533.
3. With power off, connect the input power supply to V_{IN+} and V_{IN-} as shown in Figure 3.
4. With power off, connect the load to V_{OUT+} and V_{OUT-} as shown in Figure 3.
5. Connect the input and output kelvin connections shown in Figure 3 to the measurement devices.
6. Apply the input voltage and once operational, adjust the load within the operating range and observe the efficiency, temperature and other characteristics.
7. For shutdown, please follow the above steps in reverse. (**The input supply can be turned off as well**)

In order to measure the input and output currents, proper shunts can be connected in series with the corresponding connections. (input supply and load, respectively)

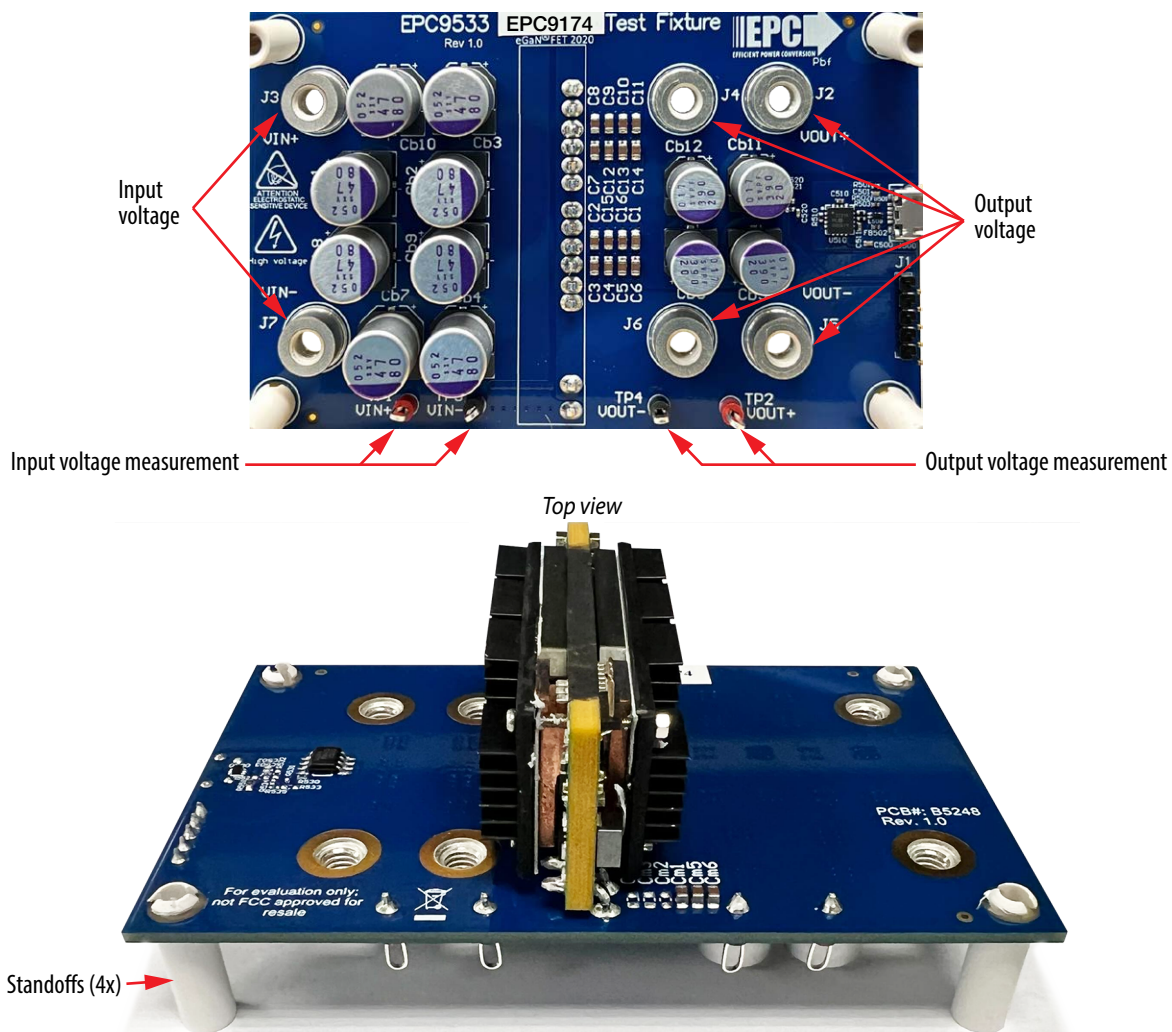


Figure 3: EPC9174 and motherboard assembly showing the input and output connections

ELECTRICAL and THERMAL PERFORMANCE

Typical efficiency and power loss

The module provides maximum efficiency of 97.3% and full load efficiency of 96.3%.

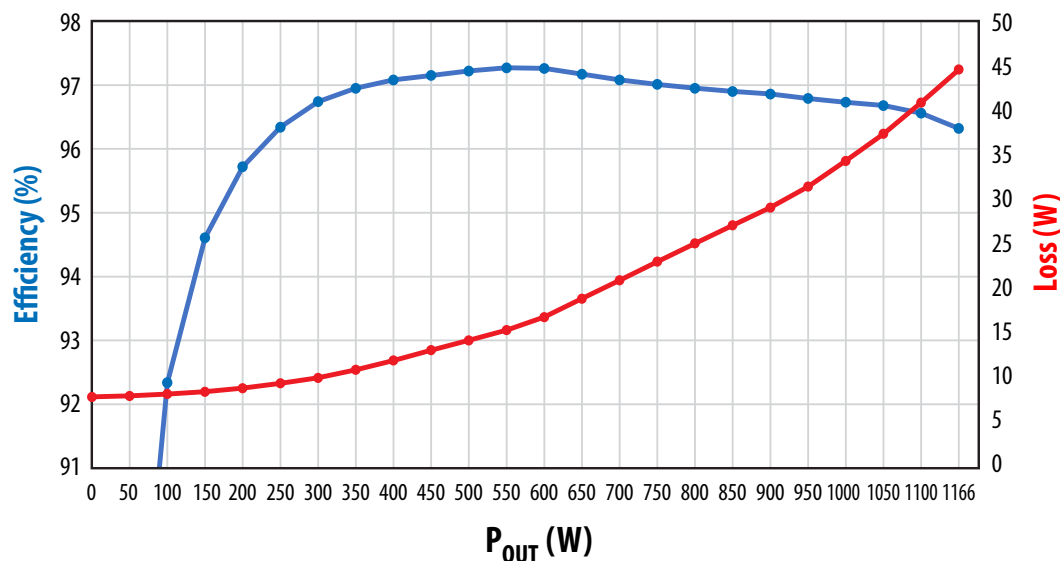


Figure 4: Total system efficiency and loss @ 12 V output, 48 V input voltage, 400 LFM forced air cooling.

Soft start-up

The start-up of the EPC9174 output voltage is programmed to be a soft start-up: Once the input voltage passes the UVLO of the bias supply IC, the output voltage rises monotonously from 0 to its final value in less than 5 ms (Figure 5).

The start up waveform is measured while the scope is triggered on the output voltage rise and the module is turned on into the constant resistive load of 120 m Ω that results in 1.2 kW load at 12 V output voltage. Both primary and secondary FETs are commanded with a minimum pulse width and the duty cycle is slowly ramped up as the output voltage increases to avoid excessive current and voltage stresses during startup.

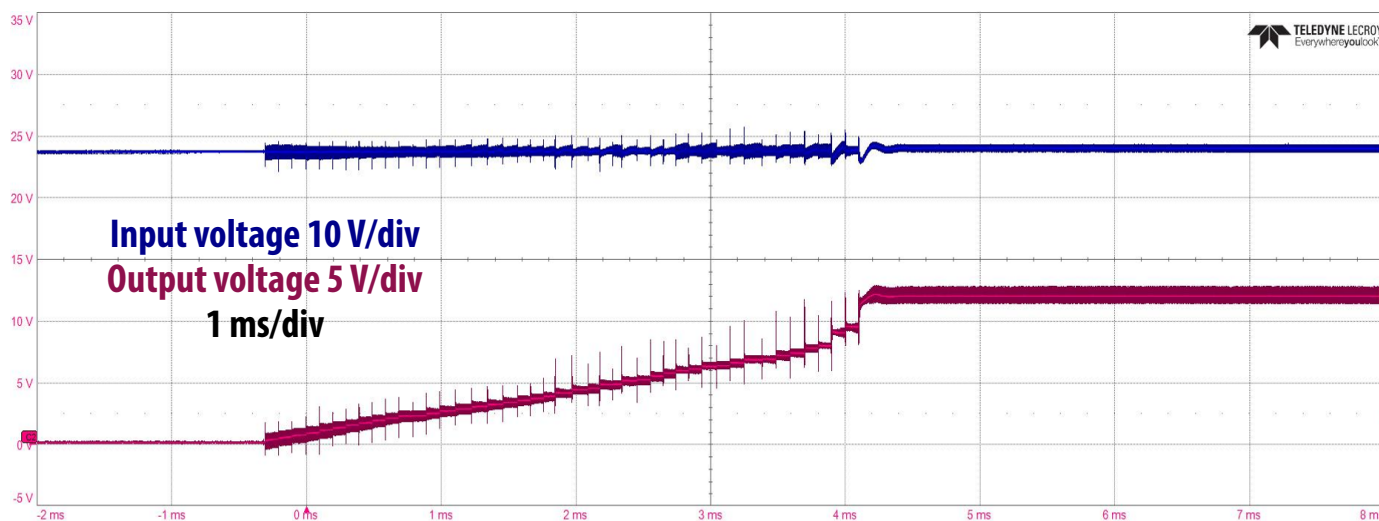


Figure 5: Startup waveform (larger time scale on top and zoomed in version on the bottom)

Output voltage droop

This converter operates in open loop meaning that output voltage is not regulated at various line and load conditions. Therefore, output voltage droops when higher loads are applied to the module. Figure 6 shows the output voltage droop as function of load current at nominal 48 V input voltage. In DC transformer applications, the lowest possible deviation of the voltage conversion ratio between the input and output across the entire load is desired.

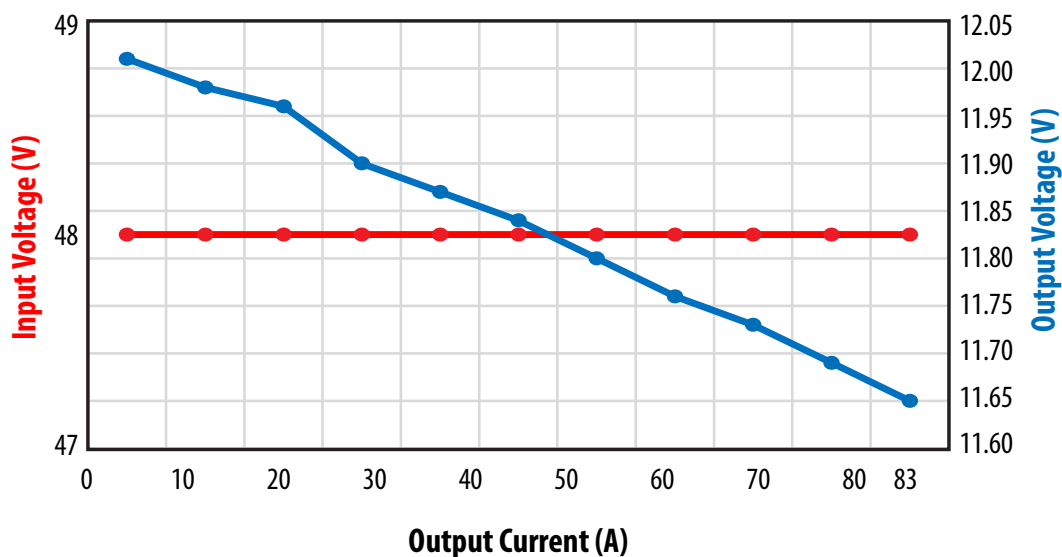


Figure 6: Output voltage droop vs output current

Thermal performance

As shown in Figure 7, the EPC9174 board with the heat-spreader installed measures a temperature rise of 72.5°C at full load operation with 1000 LFM forced air.

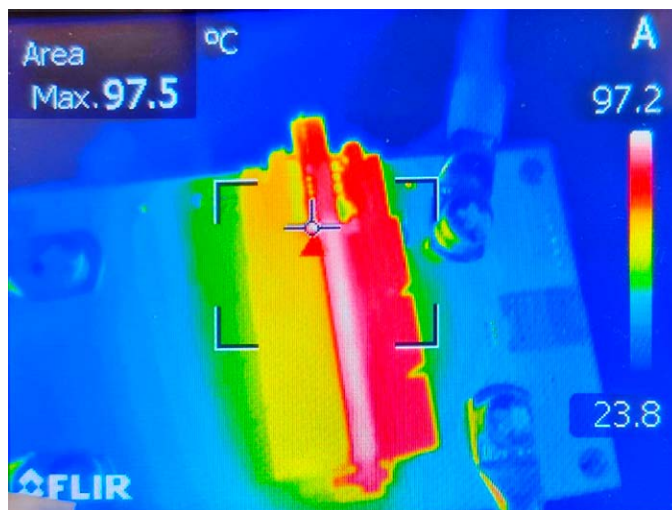
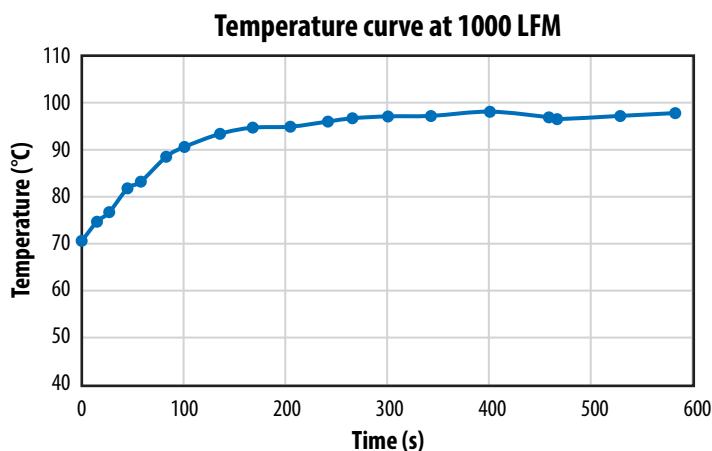


Figure 7 Thermal image of the EPC9174 operating at 48 V_{IN}, 12 V and 100 A output, thermal steady state reached after 10 minutes, Top: primary FET junction temperature and Bottom: highest board temperature (ambient temperature at 25°C).

THERMAL DERATING

Without sufficient thermal management, the output current capability is reduced. If the user decides to uninstall the heatsink, the module temperature should be monitored to ensure the maximum temperature does not exceed the rating.

THERMAL MANAGEMENT

Thermal management is very important to ensure proper and reliable operation. The EPC9174 is intended for bench evaluation at normal ambient temperature. The addition of a heat-spreader or heatsink and forced air cooling can significantly increase the current rating of the power devices, but care must be taken to not exceed the absolute maximum die temperature of 150°C.

A combination of custom shape heat spreaders and a finned heatsink for the top and bottom side of the EPC9174 board are designed. The thermal solution assembly is shown in Figure 8. Copper heat spreaders (item 1 and 3) are placed on top of both primary and secondary side FETs to spread their heat to the outer structure. Two 1 mm height copper shims (item 2) are used to fill the gaps and help with cooling the board surface. It only requires a gap filler TIM to be added underneath of the heat spreader pieces to provide insulation and high thermal conductivity between the components and the metal surface of heat spreaders. Several mechanical shims help mounting the heat spreader on the PCB surface and maintaining required clearance between the heat spreader and component surfaces. Mechanical screws are inserted on the board to hold the entire mechanical structure together.

A step-by-step assembly guideline are presented. The needed parts are listed below.

- 2x heatsinks for top and bottom side (not identical)
- 2x Copper (Cu) heat spreaders for primary FETs (item #1)
- 2x Cu spacers/seats for primary FETs (item #2)
- 2x Cu heat spreaders for secondary FETs (item #3)
- 2x M1.4 16 mm screws
- 2x M1.4 nuts
- 2x M2 10 mm screws
- TIM pads TG-A1780 0.5 mm
- TIM pads TG-A6300 0.5 mm
- TIM gap filler Bergquist GF4000


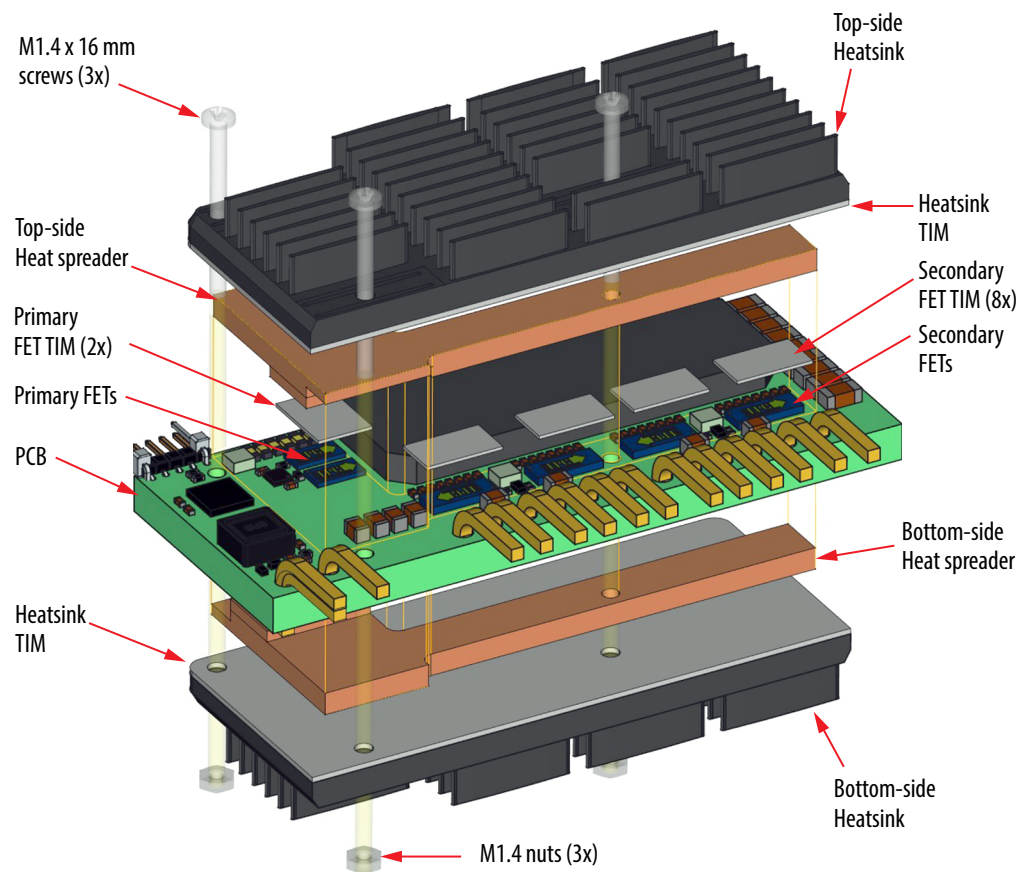


Figure 8: Thermal solution assembly process for the EPC9174 module


THERMAL SOLUTION ASSEMBLY GUIDELINES

1. Beginning at the top face of the PCB, note the position of the primary and secondary FETs

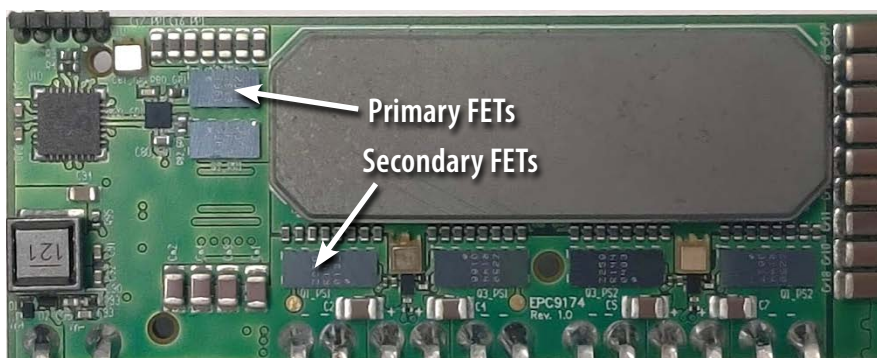


2. Add a small amount of **TIM gap filler** (Bergquist GF4000) on PCB next to Primary FETs

3. Place **TIM pads** (TG-A1780) on the primary and secondary FETs

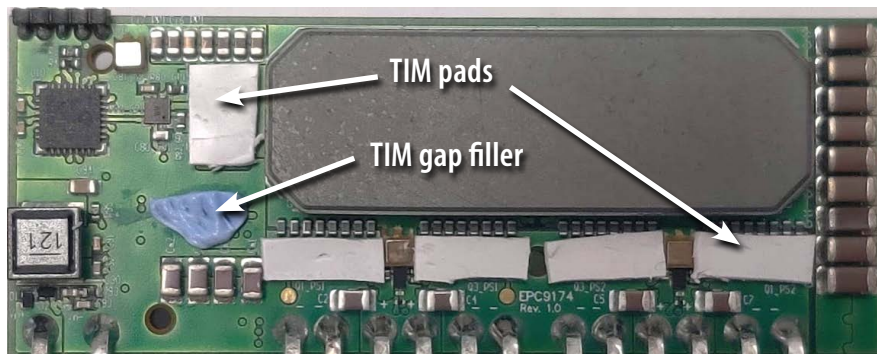

4. Place **heat spreaders** on the FETs, making sure the holes align with the drill holes on the PCB

Note: The two Cu heat spreaders for top and bottom sides are not identical

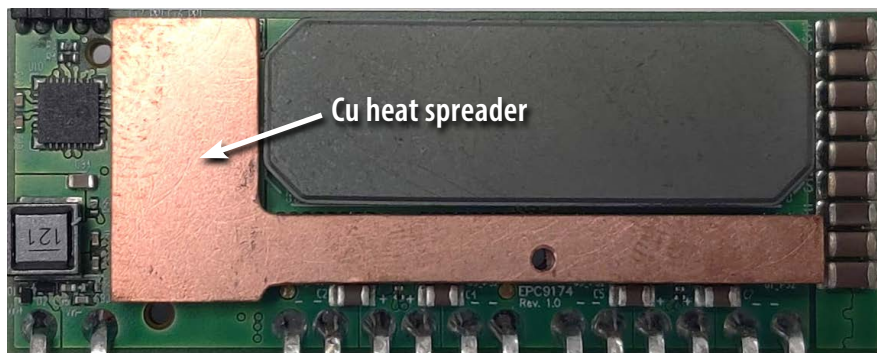


5. Place **TIM pad** (TG-A6200) on the backside of the heatsink (flat side) and align it to PCB holes



6. Use **M1.4** and **M2 screws** for assembly as shown in schematic; M2 is connected to threaded flange on PCB, do not fully tighten the M2 screw yet




7. Repeat similar procedure for PCB backside: Add a small amount of **TIM gap filler** (Bergquist GF4000) next to Primary FETs
8. Place **TIM pad** (TG-A1780) cutouts to cover primary and secondary FETs

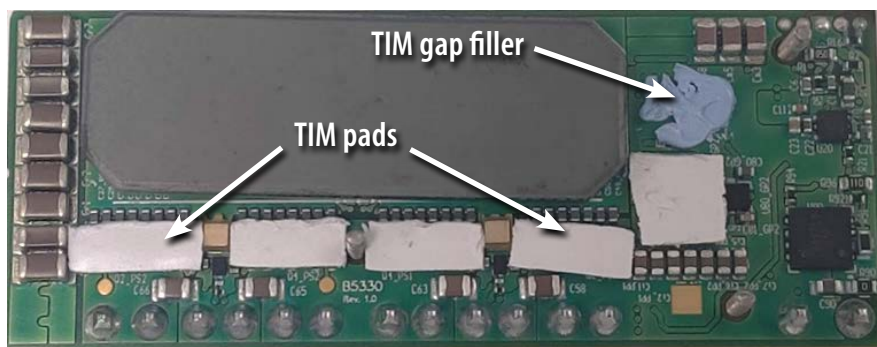

9. Place copper heat spreader on FETs, holes must align with PCB holes and the M1.4 screws


Note: The two Cu heat spreaders for top and bottom sides are not identical

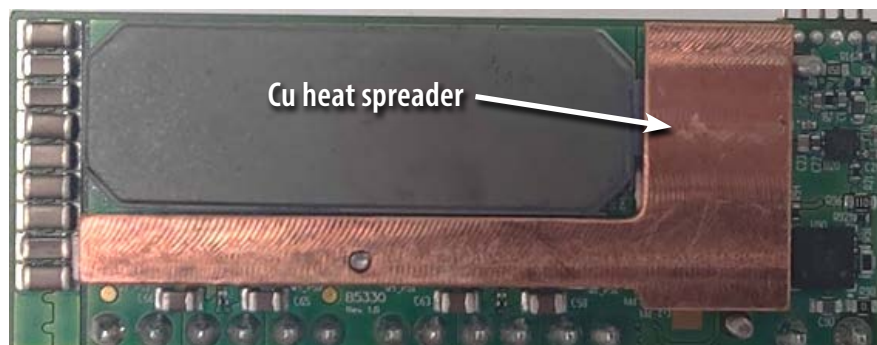



10. Place TIM (TG-A6200) on backside of heatsink and align it to screw holes



11. Use **M1.4 nuts** and an **M2 screw** to assemble heatsink to the PCB as shown; M2 can be connected to threaded flange on PCB

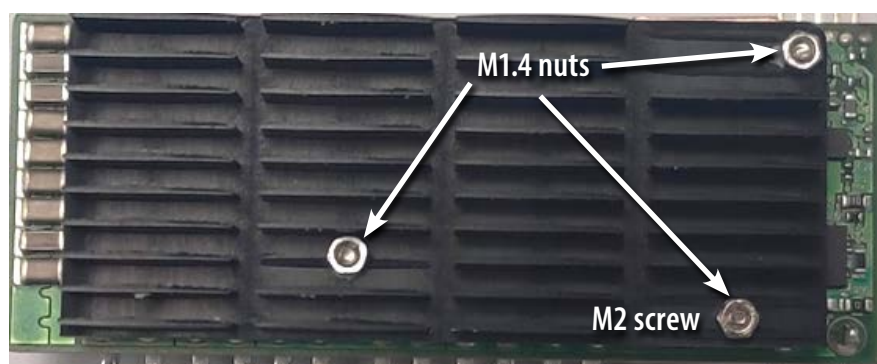

12. Tighten screws in sequence while keeping heatsink parallel to PCB

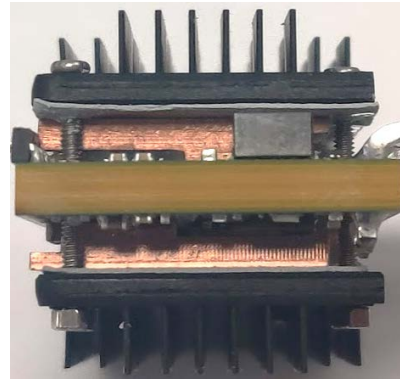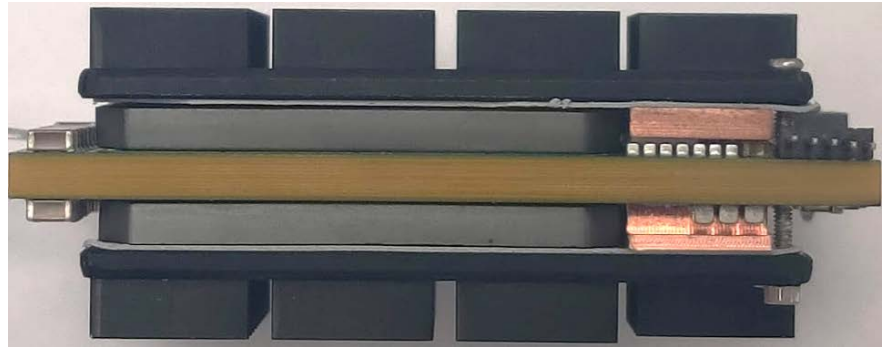

The choice of TIM needs to consider the following characteristics:

- **Mechanical compliance** – The TIM becomes compressed during heatsink attachment and exerts a force on the FETs. A maximum compression of 2:1 is recommended for maximum thermal performance and to constrain the mechanical force that maximizes thermal mechanical reliability.
- **Electrical insulation** – The backside of the eGaN FETs are substrate that are connected to source and the upper FET will thus be connected to the switch-node. The TIM must therefore provide insulation to prevent short-circuiting the upper FET to the ground.
- **Thermal performance** – The choice of thermal material will affect the thermal performance. Higher thermal conductivity materials will result in higher thermal performance.

EPC recommends T-Global: A1780- 500 μ m for the thermal interface material between FETs and heat spreaders and T-Global: A6200 for heatsinks. The gap filler TIM recommended is Bergquist GF4000.

CONTROLLER

The EPC9174 LLC power module features a Microchip dsPIC33CK32MP102 Digital Signal Controller DSC. This 100 MHz single core device is equipped with dedicated peripheral modules for Switched-Mode Power Supply (SMPS) applications, such as a feature-rich 4-channel (8x output), 250 ps resolution pulse width modulation (PWM) logic, three 3.5 Msp/s Analog-To-Digital Converters (ADC), three 15 ns propagation delay analog comparators with integrated Digital-To-Analog Converters (DAC) supporting ramp signal generation, three operational amplifiers as well as Digital Signal Processing (DSP) core with tightly coupled data paths for high performance real-time control applications. The device used is the smallest derivative of the dsPIC33CK single core and dsPIC33CH dual core DSC families. The device used in this design comes in a 28 pin 4x4 mm UQFN package, specified for ambient temperatures from -40 to +125° C.

The dsPIC33CK device is used to drive the converter in a fully digital fashion. Input voltage and output voltage measurements are fed back to the dsPIC and read using two independent core ADCs.

PROGRAMMING

The Microchip dsPIC33CK controller can be re-programmed using the MPLAB ICD4 or other Microchip programmer tools and through the 5-pin header on EPC9174 board shown below. RJ11 to ICSP adapter 02-10310-R1 from microchip is used to interface programmer and the main board (Fig. 11(b)). (Please refer to www.microchip.com for available options)

EPC9997 board is designed to be specifically used as an ICSP adapter as shown in Fig. 9(a) as well.

Please make sure the programming is performed only when the module is not running and no input voltage is applied.

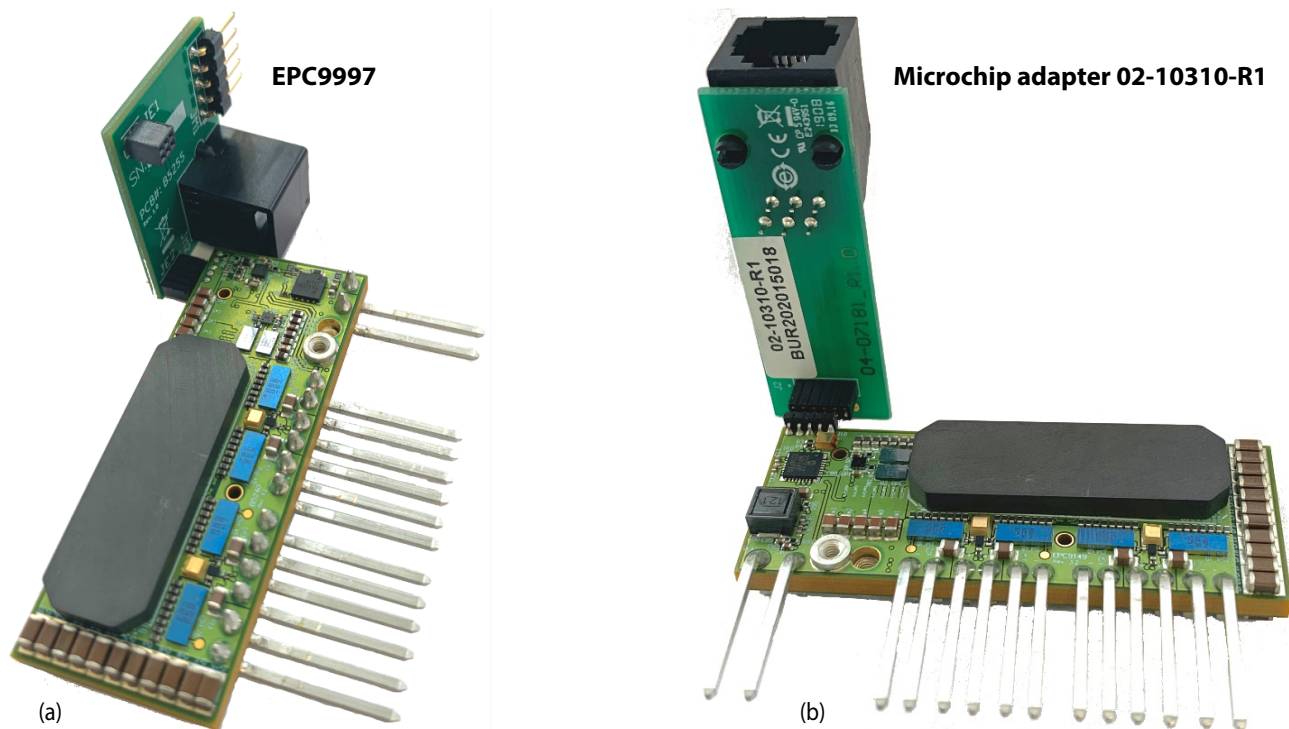



Figure 9: Programming connection options

Programming with HEX file


Download the latest MPLAB® X IDE from Microchip website and follow the five steps below:

<https://www.microchip.com/mplab/mplab-integrated-programming-environment>


1. Enable Advanced Mode:

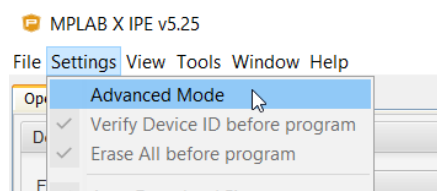


5. Erase device, and then program device:

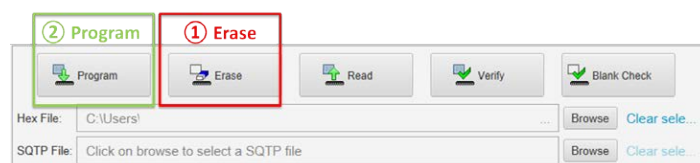


2. Select Device: dsPIC33CK32MP102 and then apply:

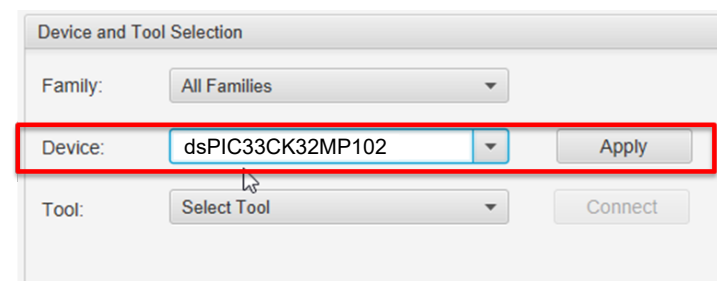


3. Select programming tool and then connect:

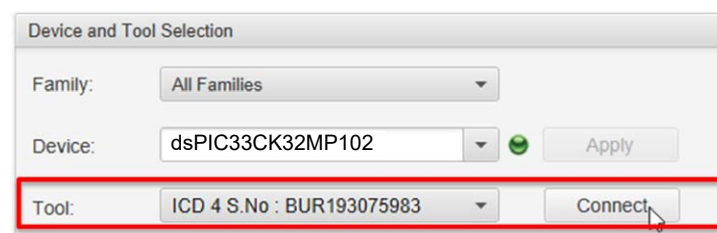

4. Click 'Browse' to select the provided .hex file:

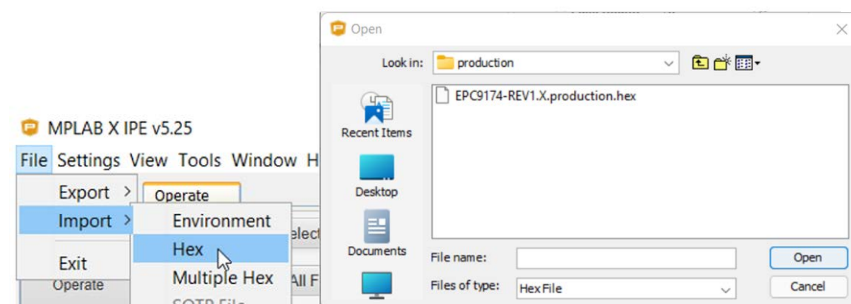

Optional: Enable 'Power target circuit from programming tool' from left panel 'Power' tab so that no additional power supply is necessary during programming:

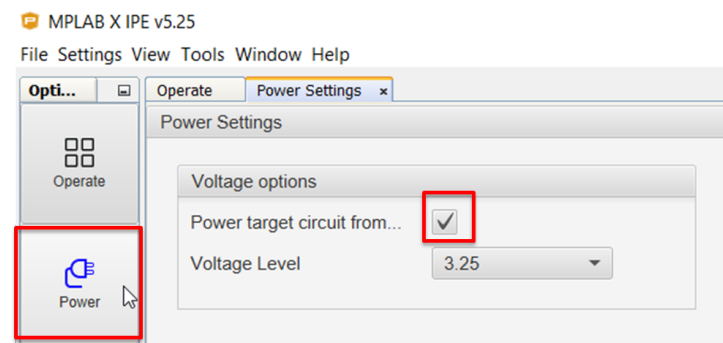

Communication

The built-in USB to UART adaptor on the EPC9533 motherboard uses MCP2221A, and is connected to the same PGD and PGC pins as in J10 (see Figure 10).

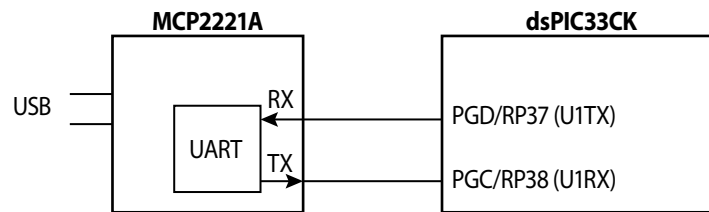


Figure 10: RX and TX pin map of the USB to UART adaptor

The 5 V from the USB port does not provide power for 3.3 V.

To use I²C instead of UART, the EPC9533 needs to be modified as follows:

- Remove resistors R530 and R531 (size 0402, 0 Ω)
- Install resistors R532 and R533 (size 0603, 0 Ω)

Note: Once configured to use I²C, programming of the device is not possible.

THERMAL MECHANICAL DRAWINGS

Table 2: Bill of Materials - Thermal-Mechanical components

Item	Qty	Part Description	Manufacturer	Part #
1	1	Heatsink (Top)	Alpha Novatech	S08EHS0E
2	1	Heatsink (Bottom)	Alpha Novatech	S08EHS0D
3	1	Integrated Heat Spreader (Top)	N/A	N/A
4	1	Integrated Heat Spreader (Bottom)	N/A	N/A
5	2	Primary FET TIM Pad (5 mm x 7 mm)	T-Global	TG-A1780x0.5mm
6	8	Secondary FET TIM Pad (4.5 mm x 7.5 mm)	T-Global	TG-A1780x0.5mm
7	2	Heatsink TIM Pad (18 mm x 48 mm)	T-Global	TG-A6200x0.3mm
8	3	M1.4x16 mm Screws	Metric Screws US	21856
9	3	M1.4 Hex Nuts	Metric Screws US	20680

Item	Qty	Part Description	Manufacturer	Part #
1	1	Heatsink (Top)	Alpha Novatech	S08EHS0E
2	1	Heatsink (Bottom)	Alpha Novatech	S08EHS0D





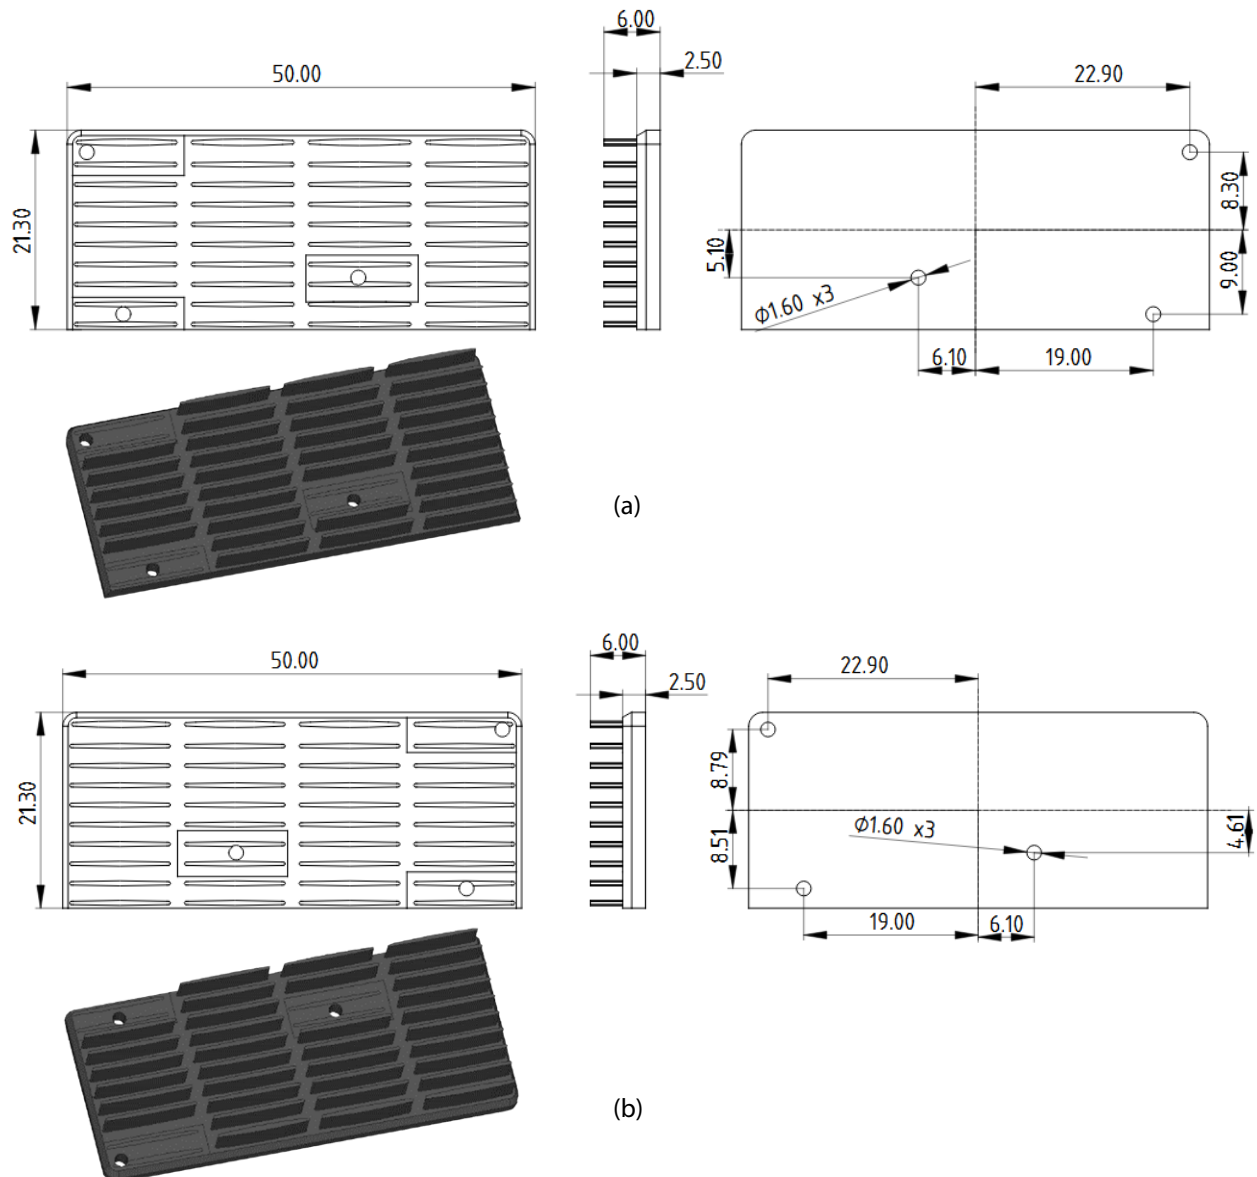


Figure 11: Top side and (b) bottom side heatsink drawing. Units in mm.
Heatsink Drawing based on Alpha Novatech part UB2150-6BM-147, drawing S08EHS0D and S08EHS0E



Item	Qty	Part Description	Manufacturer	Part #
3	1	Integrated Heat Spreader (Bottom)	N/A	N/A
4	1	Integrated Heat Spreader (Top)	N/A	N/A

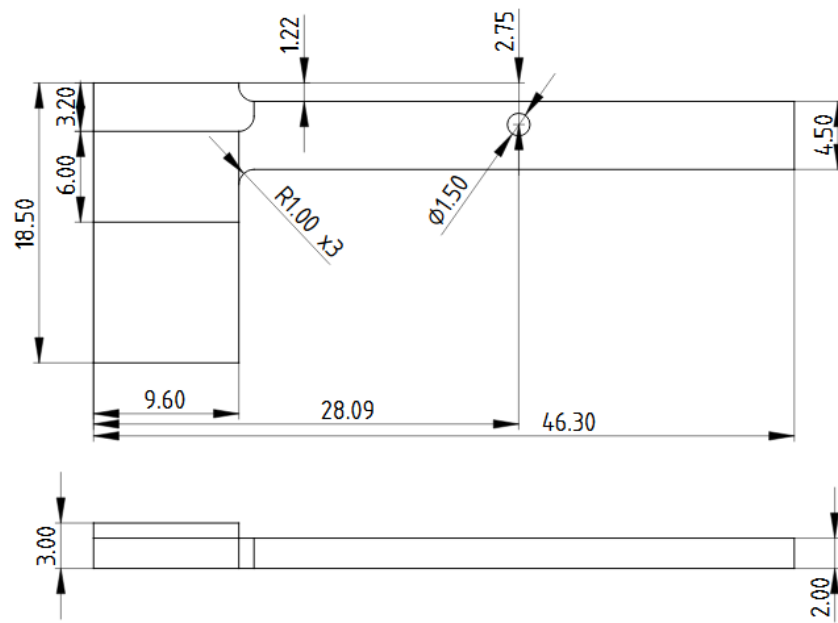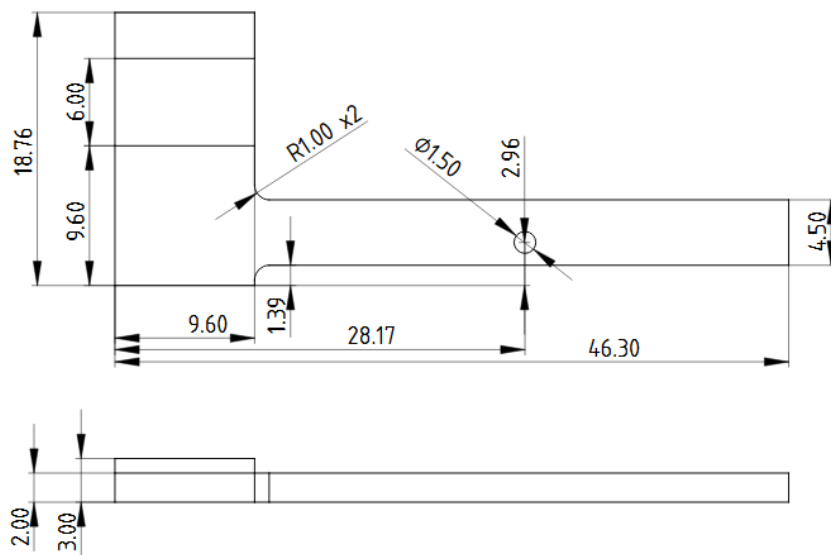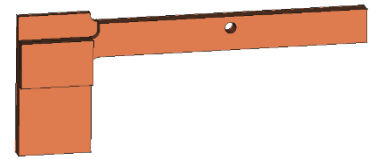

(a)



(b)

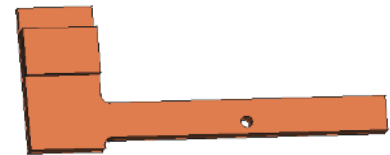

All units in mm

Figure 12. (a) Top side copper heat-spreader, (b) Bottom side copper heat-spreader

CORE DRAWING AND DIMENSIONS

All units in mm

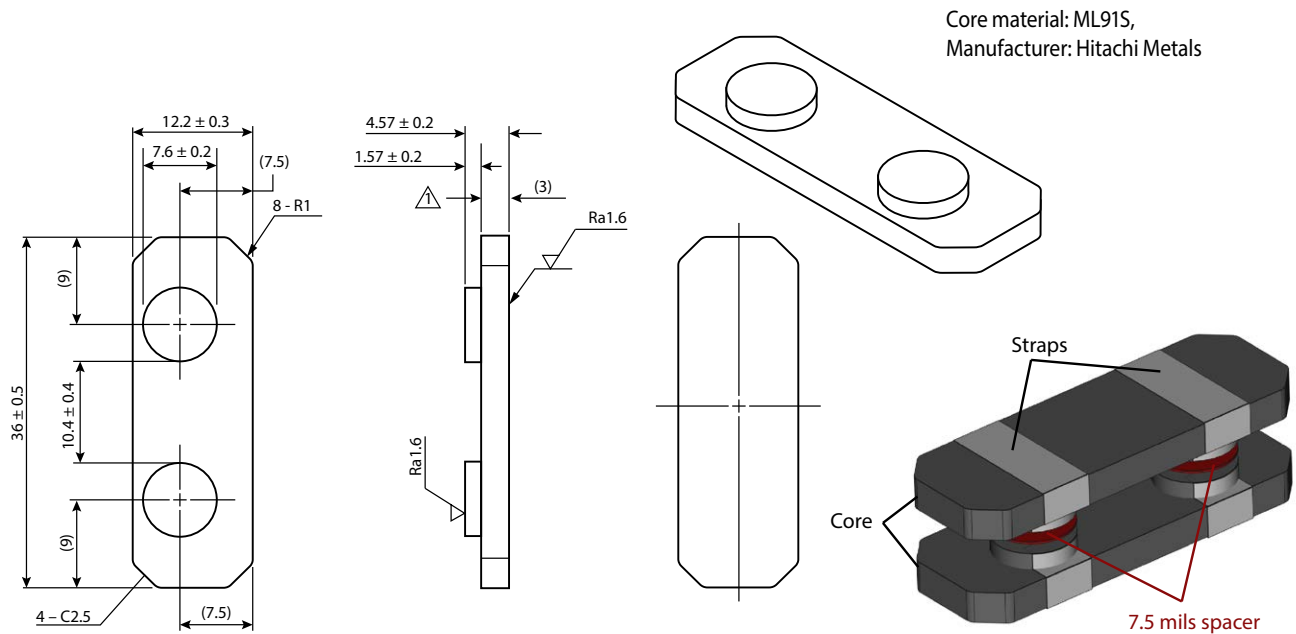


Figure 13: Drawing with dimensions of the transformer core

Table 3: Bill of Materials - EPC9174 module electrical

Item	Qty	Reference	Part Description	Manufacturer	Part #
1	2	C1, C6		Kemet	C0402C103J3REC
2	8	C2, C4, C5, C7, C58, C63, C65, C66		Murata	GRT21BR61E226ME13L
3	1	C10		Kemet	C0402C103K4RECAUTO
4	5	C11, C12, C13, C81_GP1, C81_GP2		Yageo	CC0402KRX7R8BB104
5	64	C14_PS1, C14_PS2, C15_PS1, C15_PS2, C16_PS1, C16_PS2, C17_PS1, C17_PS2, C18_PS1, C18_PS2, C19_PS1, C19_PS2, C20_PS1, C20_PS2, C24_PS1, C24_PS2, C25_PS1, C25_PS2, C26_PS1, C26_PS2, C27_PS1, C27_PS2, C28_PS1, C28_PS2, C29_PS1, C29_PS2, C30_PS1, C30_PS2, C31_PS1, C31_PS2, C32_PS1, C32_PS2, C33_PS1, C33_PS2, C34_PS1, C34_PS2, C35_PS1, C35_PS2, C36_PS1, C36_PS2, C44_PS1, C44_PS2, C45_PS1, C45_PS2, C46_PS1, C46_PS2, C47_PS1, C47_PS2, C48_PS1, C48_PS2, C49_PS1, C49_PS2, C50_PS1, C50_PS2, C51_PS1, C51_PS2, C52_PS1, C52_PS2, C53_PS1, C53_PS2, C54_PS1, C54_PS2, C55_PS1, C55_PS2		TDK	C1005JB1E225K050BC
6	2	C21, C22		Murata	GRT155R61E105ME01D
7	1	C23		Samsung	CL05A226MQ5N6J8
8	4	C40_GS11, C40_GS12, C40_GS21, C40_GS22	CAP CER 4.7 μ F 6.3 V X5R 0201	Murata	GRM035R60J475ME15D
9	4	C41_GS11, C41_GS12, C41_GS21, C41_GS22	CAP CER 33 pF 25 V C0G/NP0 0201	Murata	GRM0335C1E330JA01D
10	2	C80_GP1, C80_GP2		TDK	C1005X5R1A475K050BC
11	1	C90		Taiyo Yuden	HMK107C7224KAHTE
12	1	C91		TDK	C1005X6S1C105K050BC
13	1	C92		TDK	C1005X7S2A103K050BB
14	1	C93		TDK	CGA2B3X7S2A332M050BB
15	1	C94		Murata	GRM188R61E106MA73D
16	1	C95		Murata	GRM155R71H103KA88D
17	14	Ci1_PP1, Ci1_PP2, Ci2_PP1, Ci2_PP2, Ci3_PP1, Ci3_PP2, Ci4_PP1, Ci4_PP2, Ci5_PP1, Ci5_PP2, Ci6_PP1, Ci6_PP2, Ci7_PP1, Ci7_PP2		Taiyo Yuden	HMK107C7224
18	7	Cm1, Cm2, Cm3, Cm4, Cm5, Cm8, Cm9		TDK	C2012X7S2A105M125AB
19	18	Cr1, Cr2, Cr3, Cr4, Cr5, Cr6, Cr7, Cr8, Cr9, Cr10, Cr11, Cr12, Cr13, Cr14, Cr15, Cr16, Cr17, Cr18		Kemet	C1206C224K3JAC7800
20	2	D1, D2	DIODE GEN PURP 80 V 125 MA 2DFN	Diodes Inc.	1N4448HLP-7
21	4	FB_GS11, FB_GS12, FB_GS21, FB_GS22	FERRITE BEAD 240 Ω 0201 0.35 A 380 m Ω	Murata	BLM03AX241SN1D
22	1	J10			
23	1	L90		Bourns	SRR4828A-121M
24	4	Q1_PP1, Q1_PP2, Q2_PP1, Q2_PP2	100 V 2.2 m Ω 64 A	EPC	EPC2071
25	8	Q1_PS1, Q1_PS2, Q2_PS1, Q2_PS2, Q3_PS1, Q3_PS2, Q4_PS1, Q4_PS2	40 V 1.1 m Ω 90 A	EPC	EPC2066
26	1	R1		Panasonic	RC0603FR-07110KL
27	1	R2		Panasonic	ERA-2AEB4871X
28	1	R3		Yageo	RC0402FR-0720RL
29	1	R4		Panasonic	ERA-2AEB183X
30	1	R5		Panasonic	ERA-2AEB4751X
31	1	R11		Murata	BLM18PG181SN1D
32	1	R16		Yageo	RC0402JR-0710KL
33	1	R21		Yageo	RC0402JR-070RL
34	4	R40_GS11_Off, R40_GS12_Off, R40_GS21_Off, R40_GS22_Off	RES 0.47 Ω 1% 1/10 W 0201	ROHM	UCR006YVPLR470
35	4	R40_GS11_On, R40_GS12_On, R40_GS21_On, R40_GS22_On	RES SMD 2 Ω 5% 1/20 W 0201	Panasonic	ERJ-1GNJ2R0C
36	4	R41_GS11, R41_GS12, R41_GS21, R41_GS22	RES 10 K Ω 1% 1/20 W 0201	Panasonic	RMCF0201FT10K0
37	4	R80_GP1, R80_GP2, R82_GP1, R82_GP2		Yageo	RC0402FR-071RL
38	1	R90		Panasonic	ERJ-3GEY0R00V
39	1	R91		Yageo	RC0603FR-0786K6L
40	1	R92		Yageo	RC0402FR-0716K5L
41	1	R93		Yageo	RC0402JR-0768KL
42	1	R94		Yageo	RT0402DRD0711K3L
43	1	R95		Yageo	RC0402FR-073K65L
44	1	R96		Yageo	RC0603FR-07127KL
45	1	U10		Microchip	DSPIC33CK32MP102T-I/M6
46	1	U20		TI	TLV75533PDRVR
47	4	U40_GS11, U40_GS12, U40_GS21, U40_GS22		Texas Instruments	LMG1020YFF
48	2	U80_GP1, U80_GP2		uPI	uP1966A
49	1	U90		Texas Instruments	LM5018SD/NOPB







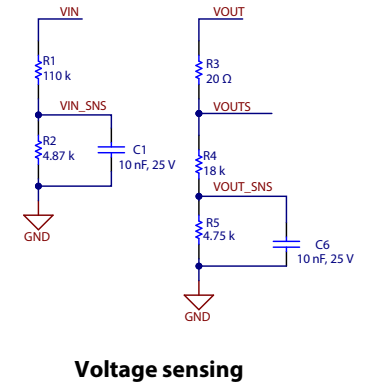


Figure 14: **Control stage:** This stage contains microcontroller, input and output voltage sensing, 5V bias supply for the drivers and 3.3V regulator for the dsPIC supply

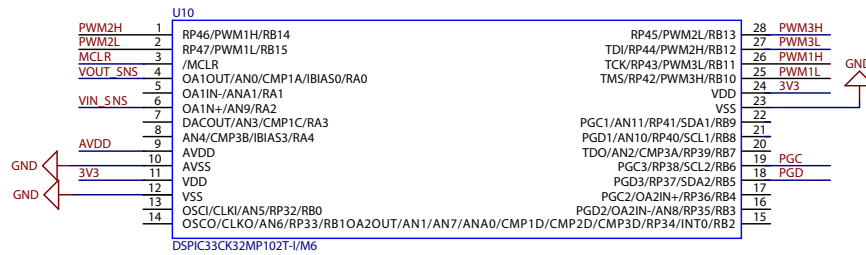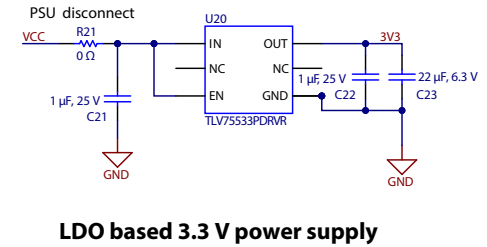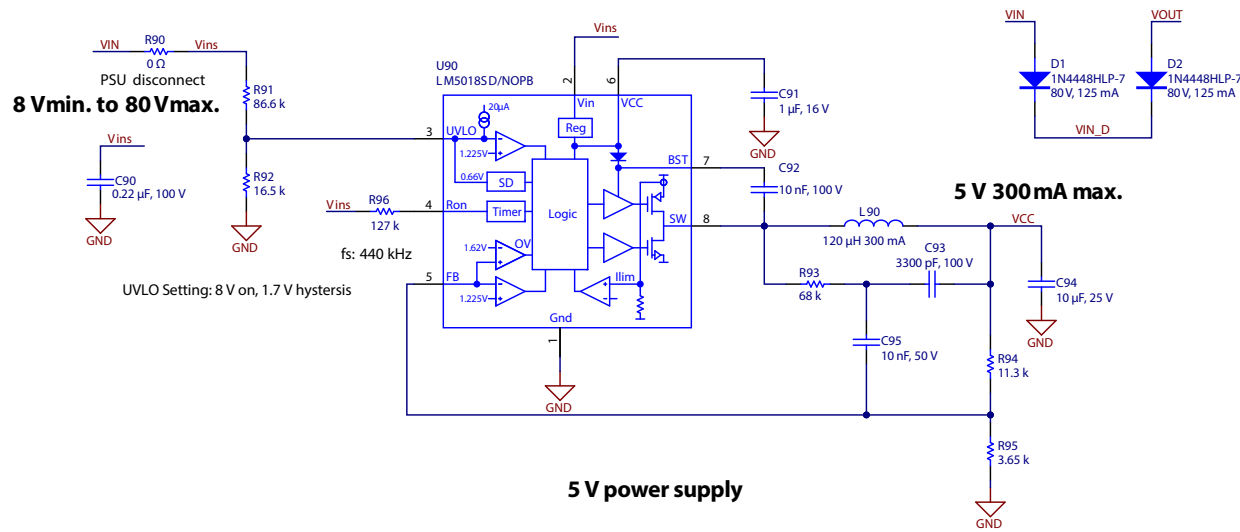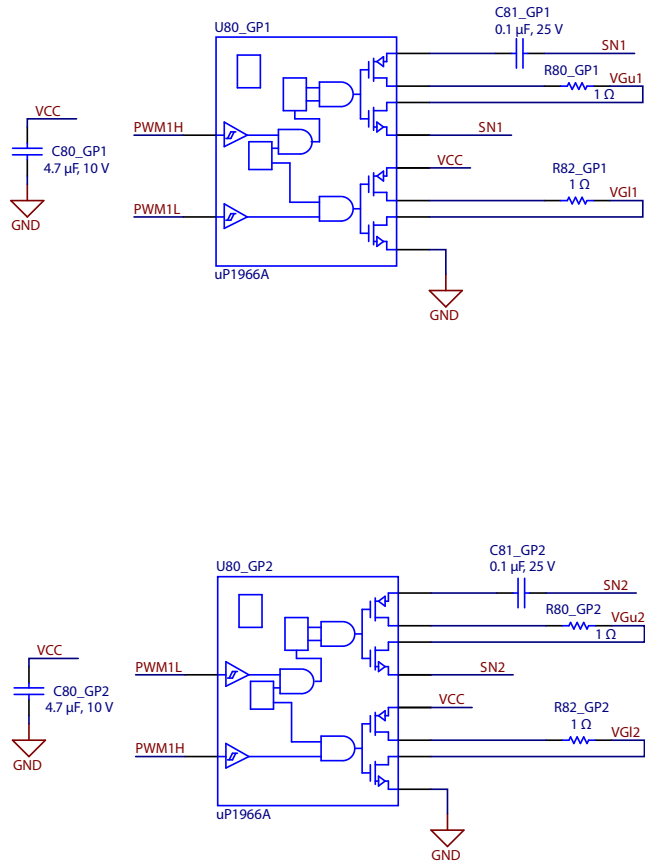


Primary-side Gate Drivers

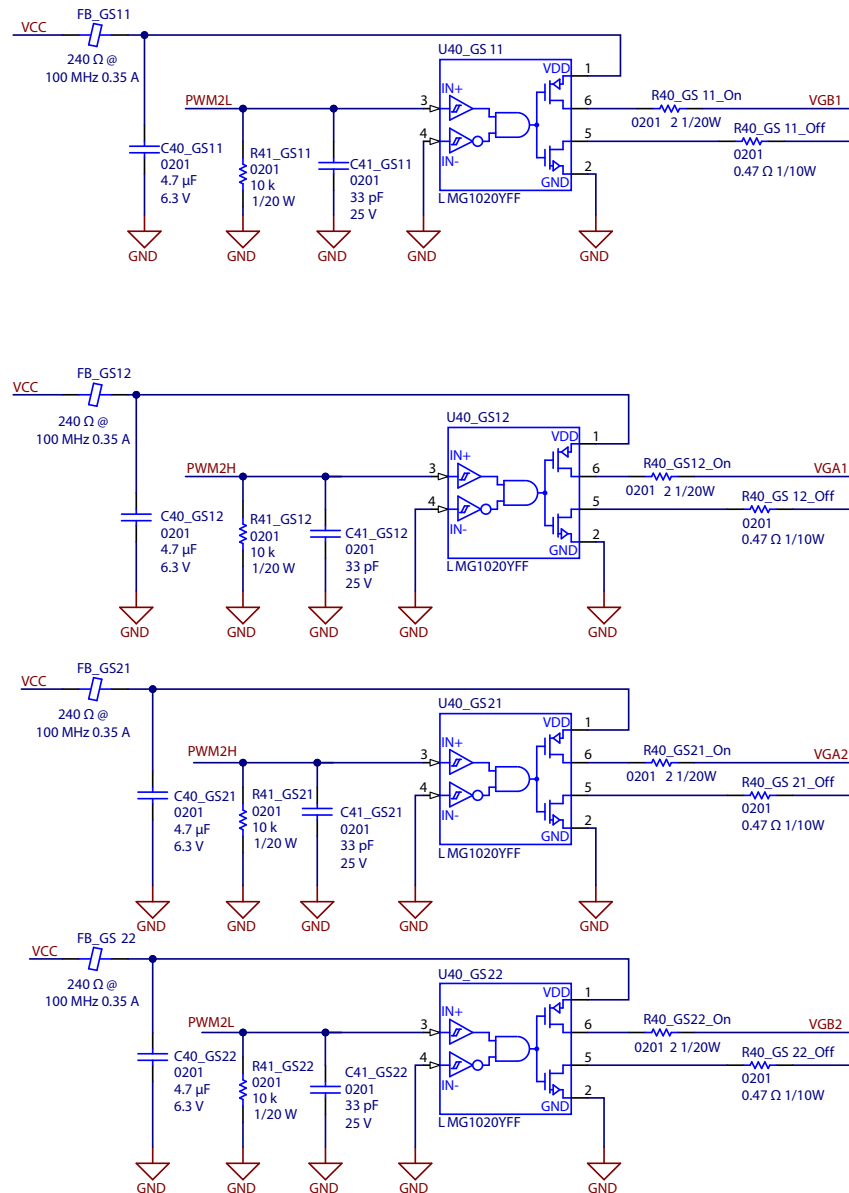

Secondary-side Gate Drivers

Figure 15: **Driver stage:** This stage contains all the driver circuitry for the primary and secondary side FETs

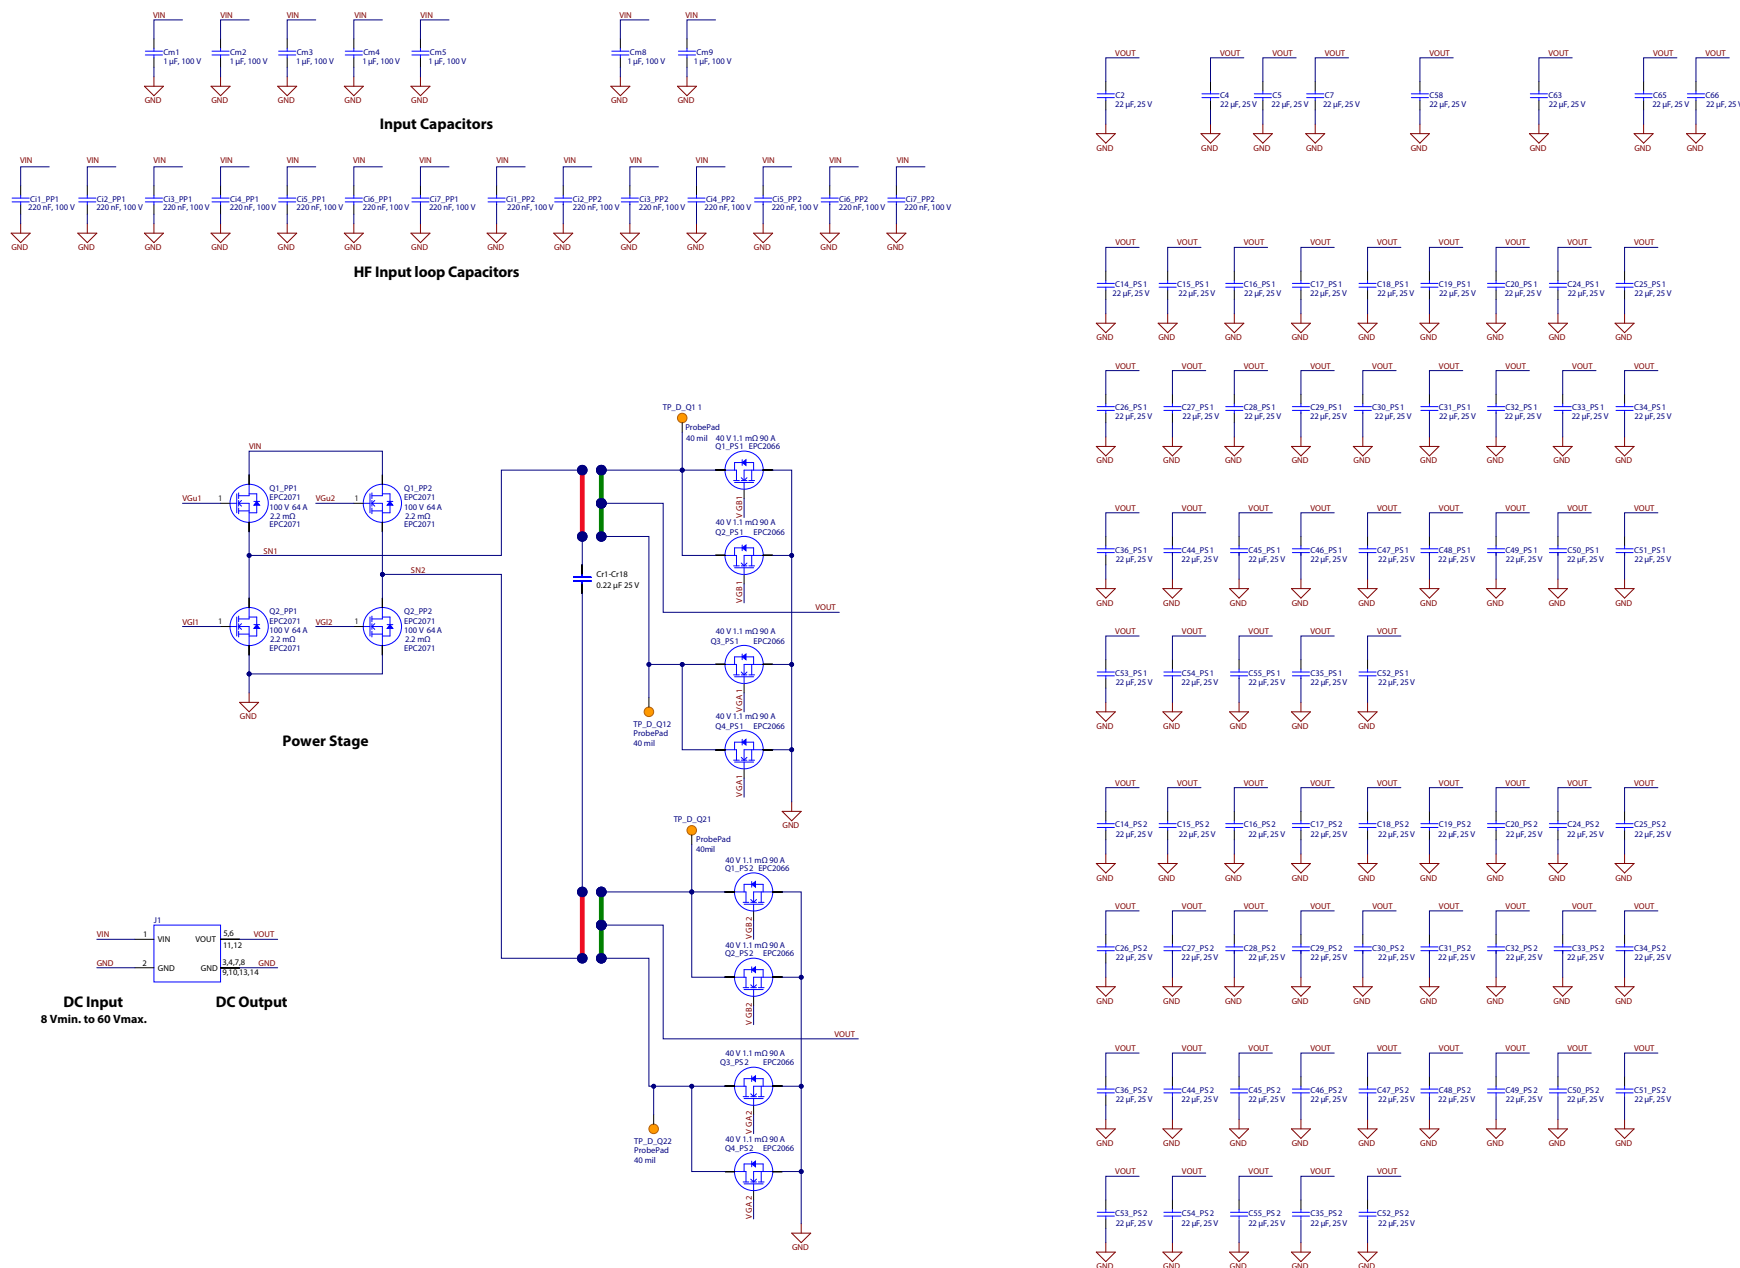



EPC would like to acknowledge Microchip Technology Inc. (www.microchip.com) for their support of this project.

Microchip Technology Incorporated is a leading provider of smart, connected and secure embedded control solutions. Its easy-to-use development tools and comprehensive product portfolio enable customers to create optimal designs, which reduce risk while lowering total system cost and time to market. The company's solutions serve customers across the industrial, automotive, consumer, aerospace and defense, communications and computing markets.

The EPC9174 system features the [dsPIC33CK32MP102](#) 16-Bit Digital Signal Controller with High-Speed ADC, Op Amps, Comparators and High-Resolution PWM. Learn more at www.microchip.com.

For More Information:

Please contact info@epc-co.com
or your local sales representative

Visit our website:
www.epc-co.com

Sign-up to receive
EPC updates at
bit.ly/EPCupdates
or text "EPC" to 22828



EPC Products are distributed through Digi-Key.
www.digikey.com

Demonstration Board Notification

The EPC9174 board is intended for product evaluation purposes only. It is not intended for commercial use nor is it FCC approved for resale. Replace components on the Evaluation Board only with those parts shown on the parts list (or Bill of Materials) in the Quick Start Guide. Contact an authorized EPC representative with any questions. This board is intended to be used by certified professionals, in a lab environment, following proper safety procedures. Use at your own risk.

As an evaluation tool, this board is not designed for compliance with the European Union directive on electromagnetic compatibility or any other such directives or regulations. As board builds are at times subject to product availability, it is possible that boards may contain components or assembly materials that are not RoHS compliant. Efficient Power Conversion Corporation (EPC) makes no guarantee that the purchased board is 100% RoHS compliant.

The Evaluation board (or kit) is for demonstration purposes only and neither the Board nor this Quick Start Guide constitute a sales contract or create any kind of warranty, whether express or implied, as to the applications or products involved.

Disclaimer: EPC reserves the right at any time, without notice, to make changes to any products described herein to improve reliability, function, or design. EPC does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights, or other intellectual property whatsoever, nor the rights of others.