


NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIAL:

HOUSING: THERMOPLASTIC SEAL: SILICONE RUBBER


- 2. MODIFICATIONS: END CAP
- 3. SPECIFICATIONS:
 - 3.1 CURRENT RATING: 13 AMPS
 - 3.2 OPERATING TEMPERATURE: -55°C TO +125°C
 - 3.3 DIELECTRIC WITHSTANDING VOLTAGE: LESS THAN 2 MILLIAMPS CURRENT LEAKAGE @ 1500 VOLTS AC.
 - 3.4 INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 25°C.
 - 3.5 MOISTURE RESISTANCE: IP68(1M OF WATER FOR A PERIOD OF 24 HOURS, MATED CONDITION) IP69K(MATED CONDITION)
 - 3.6 MATING CYCLE DURABILITY: 100 CYCLES
 - 3.7 RoHS COMPLIANT
- 4. MATING PART: AT06-6S* PLUG (* = MODIFICATIONS AND COLORS)
- 5. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.

6	CONTACT SIZE AND REAR SEAL WIRE RANGE:						
	CONTACT SIZE	MIN. INSUL O.D.	MAX. INSUL O.D.	TYPICAL WIRE RANGE			
	16	2.24 mm (.088 in)	3.68 mm (.145 in)	14 - 20 AWG (2.0-0.5mm²)			

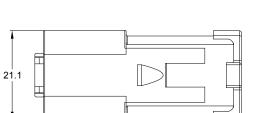

PART NUMBER CHART			
COLOR	PART NUMBER		
GREY	AT04-6P-EC01		
BLACK	AT04-6P-EC01BLK		
BLUE	AT04-6P-EC01BLU		
BROWN	AT04-6P-EC01BRN		
GREEN	AT04-6P-EC01GRN		
RED	AT04-6P-EC01RED		
WHITE	AT04-6P-EC01WHT		
YELLOW	AT04-6P-EC01YEL		
ORANGE	AT04-6P-EC01ORG		

	REVISIONS							
REV	ECO	DESCRIPTION	DATE	BY	APPR			
A3	-	RELEASE NEW DWG FORMAT	03JAN14	JARRY	-			
A4	C0540S	UPDATE DIMENSIONS	04JUL16	JONY	TOMMY			
A5	-	ADD COLOR OPTION	23NOV20	LOUIE	TOMMY			

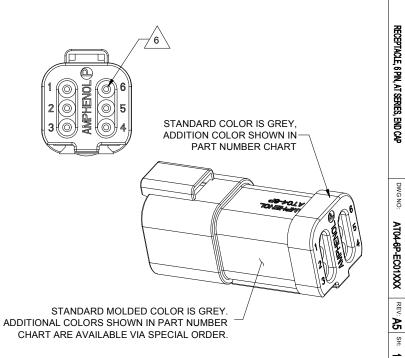

	SEE PART N	JMBER C	HART		REF: DT04-6P-E003, DT04-6P-EP04, DT04-6P-E005		
	PART N	IUMBER		DESCRIPTION			
QUANTITY MA			MAT	ERI	ALS LIST		
	UNLESS OTHERWISE SPECIFIED 1) All dimensions are in metric(mm). 2) Tolerances are as follows:		ATURES	RES DATE Amphon			
			LOUIE	23NOV20	Amphenol		
2 PL DEC ±0.15 3 PL DEC ±0.08	Fractions ±1/64 Angles ±1°	CHECKED:	ORION	25NOV20	Sine Systems - www.amphenol-sine.com		
3) Note reference =	• 🛦	ENGINEER:			44724 Morley Drive		
MATERIAL SPECIFICAT	TIONS:	APPROVAL:	TOMMY	27NOV20	Clinton Township, MI 48036		
					RECEPTACLE, 6 PIN, AT SERIES, END C	AΡ	
PROCESS SPECIFICATIONS: NEXT ASSY:		THIS DRAWING IS SUPPLIED FOR INFORMATION ONLY. DESIGN FEATURES,			, , , , , , , , , , , , , , , , , , , ,		
		SPECIFICATIONS AND PERFORMANCE DATA SHOWN HEREON ARE THE PROPERTY OF THE AMPHENOL CORPORATION. NO RIGHTS OF REPRODUCTION ARE IMPLIED. ALL DIMENSIONS ARE SUBJECTTO NORMAL MANUFACTURING VARIATIONS.		OPERTY OF ON. NO RIGHTS JED. ALL	B C- AT04-6P-EC01XXX	A5	
				S.	SCALE: NONE SHEET 1 OF	1	

AT Series™ - Contact Size 16 Options

Machined Contacts, Sockets & Pins							
Part Number	Description		AWG	Туре			
AT60-215-1631	Male Contact - Pin, Gold-plated 16 14		Machined				
AT62-209-1631	Female Contact - Socket, Gold-plated	16	14	Machined			
AT60-215-16141	Male Contact - Pin, Nickel-plated	16	14	Machined			
AT62-209-16141	Female Contact - Socket, Nickel-plated	16	14	Machined			
AT60-202-1631	Male Contact - Pin, Gold-plated	16	16-20	Machined			
AT62-201-1631	Female Contact - Socket, Gold-plated	16	16-20	Machined			
AT60-202-16141	Male Contact - Pin, Nickel-plated 16 16-20		Machined				
AT62-201-16141	Female Contact - Socket, Nickel-plated	16	16-20	Machined			
AT60-202-1631-22	Male Contact - Pin, Gold-plated	16	22-24	Machined			
AT62-201-1631-22	-1631-22 Female Contact - Socket, Gold-plated		22-24	Machined			
AT60-202-16141-22	Male Contact - Pin, Nickel-plated	16	22-24	Machined			
AT62-201-16141-22	Female Contact - Socket, Nickel-plated	16	22-24	Machined			

Tooling - Machined Contacts				
Part	Part Number Description			
	CA-5D12	Universal Hand Crimp Tool, Size 12/16/20 (Machined contacts only)		
3	CA-5E12	Pneumatic Crimp Tool, Size 12/16/20 (Machined contacts only)		

Contact Removal Tools					
Part	Part Number	Description			
	ATRT-100	Used for removal of contacts for A Series™ products			
	AT11-310-1605	Contact Removal Tool, Plastic, Size 16			
	A114017	Sealing Plug, Size 16, White			

Stamped & Formed Contacts, Sockets & Pins							
Part Number Description		Size	AWG	Туре			
AT60-14-0144	Male Contact - Pin, Gold-plated	16	14-16	Stamped & Formed			
AT62-14-0144	Female Contact - Socket, Gold-plated	16	14-16	Stamped & Formed			
AT60-14-0122	Male Contact - Pin, Nickel-plated	16	14-16	Stamped & Formed			
AT62-14-0122	Female Contact - Socket, Nickel-plated	16	14-16	Stamped & Formed			
AT60-16-0144	Male Contact - Pin, Gold-plated	16	16-18	Stamped & Formed			
AT62-16-0144	Female Contact - Socket, Gold-plated	16	16-18	Stamped & Formed			
AT60-16-0122	Male Contact - Pin, Nickel-plated	16	16-18	Stamped & Formed			
AT62-16-0122	Female Contact - Socket, Nickel-plated	16	16-18	Stamped & Formed			
AT60-16-0644	Male Contact - Pin, Gold-plated	16	18-20	Stamped & Formed			
AT62-16-0644	Female Contact - Socket, Gold-plated	16	18-20	Stamped & Formed			
AT60-16-0622	Male Contact - Pin, Nickel-plated	16	18-20	Stamped & Formed			
AT62-16-0622	Female Contact - Socket, Nickel-plated	16	18-20	Stamped & Formed			
AT60-16-0844	Male Contact - Pin, Gold-plated	16	20-22	Stamped & Formed			
AT62-16-0844	Female Contact - Socket, Gold-plated	16	20-22	Stamped & Formed			
AT60-16-0822	Male Contact - Pin, Nickel-plated	16	20-22	Stamped & Formed			
AT62-16-0822	Female Contact - Socket, Nickel-plated	16	20-22	Stamped & Formed			

Tooling - Stamped & Formed Contacts						
Part	Part Number Description					
	MFX-3950	Crimp Die - Size 16, 18-20AWG (S&F contacts only)				
	MFX-3953	Crimp Die - Size 16, 16-18AWG (S&F contacts only)				
	MFX-3975	Crimp Die - Size 16, 14-16AWG (S&F contacts only)				
	MFX-3990	Crimp Die - Size 16, 20-22AWG (S&F contacts only)				
	ATT-16-00	Hand Crimp Tool - Size 16, 14-16AWG (S&F contacts only)				
	ATT-16-01	Hand Crimp Tool - Size 16, 18-20AWG (S&F contacts only)				
	ATT-1612-03	Hand Crimp Tool - Size 16, 20-22AWG (S&F contacts only)				

Amphenol Sine Systems 44724 Morley Drive Clinton Township, MI 48036 USA www.amphenol-sine.com 09/2021