

APPROVED: _____


DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/23/20	
A		ADDED SPEC.	5/19/21	LH/RC

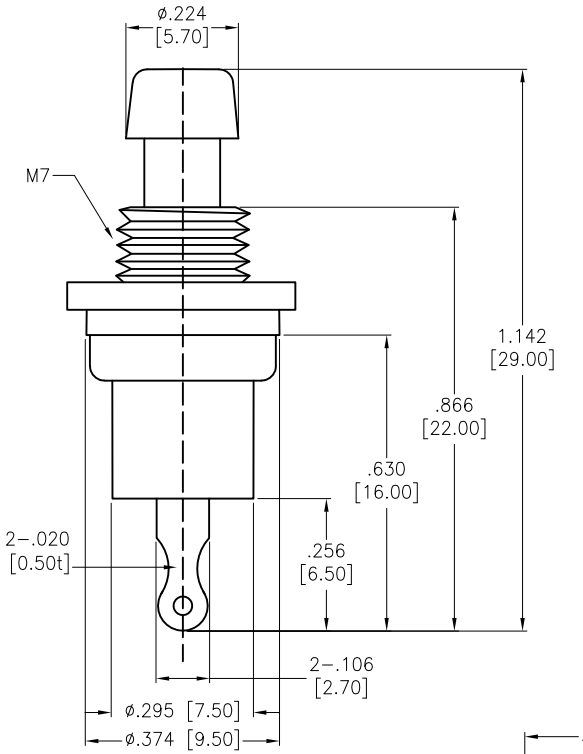





RECOMMENDED PANEL CUT





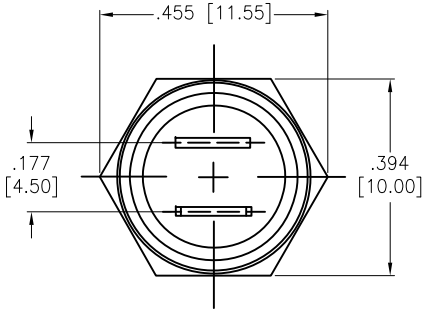



CIRCUIT DIAGRAM
(SPST)

⚠A

SW–PB1–1BS–A–PK1–X

NO.	Button Color
A	Black
B	Blue
C	Green
D	Red
E	White
F	Yellow

SPECIFICATIONS:
Material:
Housing: Brass, Nickel plated
Bottom: PBT
Button: POM
Contact: Brass, Silver plated
Spring: Spring steel wire
Electrical:
Rating: 0.5A, 250VAC
Contact resistance: 50 mΩ max
Insulation resistance: 100 Mohms min (500VDC)
Dielectric withstanding voltage: 1500 VAC for 1 minute
Electrical life: 10,000 Cycles min
Temperature Rating:
Operating temperature: –25°C to +85°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

DRAWN	OW	11/23/20
CHECKED	AC	11/23/20
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: SWITCH, PLASTIC PUSH BUTTON, SPST OFF-MOMENTRAY, SOLDER TYPE

SIZE	PART NO.	REV.
X	SW-PB1-1BS-A-PK1-X	-

REF: S00204C | SCALE: NTS | SHEET 1 OF 1