38720

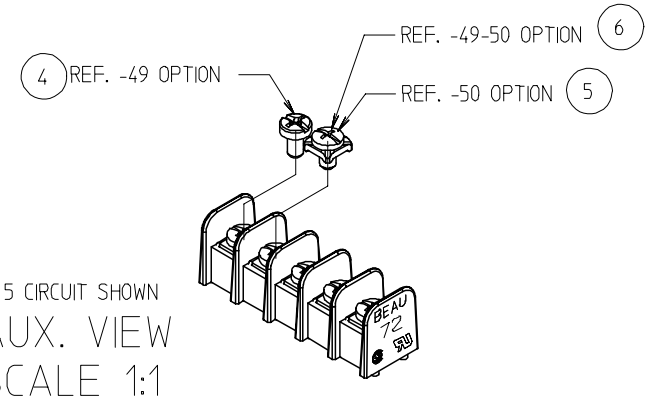

5 CIRCUIT SHOWN

AUX. VIEW
SCALE 1:1

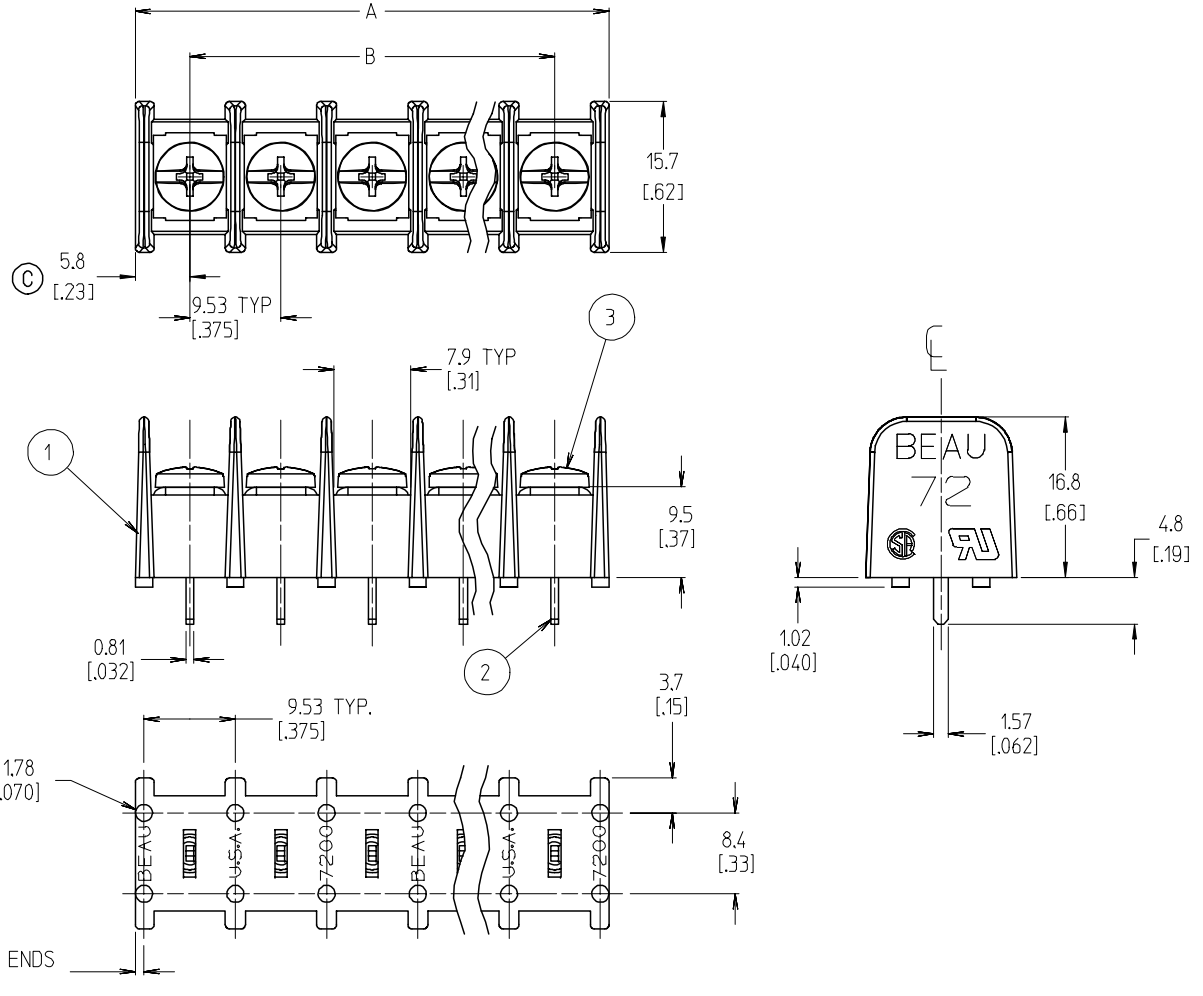

NOTES:

1. MATERIAL: SEE TABLE
2. FINISHES: SEE TABLE
3. INCH DIMS ARE SHOWN IN BRACKETS [XXX].
4. "XX" REFERS TO QUANTITY OF CIRCUITS.
5. (C) ASSEMBLY IS ROHS COMPLIANT.

ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH
6	XX	SCREW, #6-32X.250, PANHD, PH-SL W/SQ WASHER	BRASS	NICKEL PLATED
5	XX	SCREW, #6-32X.250, PANHD, PH-SL W/SQ WASHER	STEEL	ZN, CLEAR CHROMATE
4	XX	SCREW, #6-32X.250, BHD, PH-SL	BRASS	NICKEL PLATED
3	XX	SCREW, #6-32X.250, BHD, PH-SL	STEEL	ZN, CLEAR CHROMATE
2	XX	TERMINAL, PC	BRASS	TIN PLATED
1	1	INSULATOR, SINGLE ROW, UL94 V-0 (C)	PBT	BLACK

ADD UL FLAME RATING
EC NO: ETC2007-0432 2007/05/30
DRWN: CLYORK 2007/06/10
CH'KD: JMACNEIL 2007/06/11
APPR: JMACNEIL 2007/06/11
DESCRIPTION
REV

QUALITY SYMBOLS
▼=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± .005
2 PLACES	± 0.13	± .01
1 PLACE	± 0.3	± ---
ANGULAR ± 2 °		

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM/IN
SCALE: 2:1
DESIGN UNITS: INCH
THIRD ANGLE PROJECTION

		DATE
DRAWN BY	C. YORK	2004/01/21
CHECKED BY	R. KEMP	2004/01/26
APPROVED BY	P. WALTZ	2004/01/26

TITLE: 9.53MM SR BTS, PC TERM. ASSY, WITH PADS, NO MTG ENDS

MOLEX INCORPORATED

MATERIAL NO.: SEE SHT. 2
DOCUMENT NO.: SD-38720-003
SHEET NO.: 1 OF 2

SIZE: B

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

MATERIAL NO. (STD)	MATERIAL NO. (-49)	MATERIAL NO. (-50)	MATERIAL NO. (-49-50)	# OF CIRC. "XX"	"A"		"B"	
387206602	387207202	387207802	387291193	2	21.2	[.83]	9.5	[.38]
387206603	387207203	387207803	387291333	3	30.7	[1.21]	19.1	[.75]
387206604	387207204	387207804	387291195	4	40.2	[1.58]	28.6	[1.13]
387206605	387207205	387207805		5	49.7	[1.96]	38.1	[1.50]
387206606	387207206	387207806	387291199	6	59.3	[2.33]	47.6	[1.88]
387206607	387207207	387207807		7	68.8	[2.71]	57.2	[2.25]
387206608	387207208	387207808	387291202	8	78.3	[3.08]	66.7	[2.63]
387206609	387207209	387207809		9	87.8	[3.46]	76.2	[3.00]
387206610	387207210	387207810		10	97.4	[3.83]	85.7	[3.38]
387206611	387207211	387207811	387291204	11	106.9	[4.21]	95.3	[3.75]
387206612	387207212	387207812		12	116.4	[4.58]	104.8	[4.13]
387206613	387207213	387207813		13	125.9	[4.96]	114.3	[4.50]
387206614	387207214	387207814		14	135.5	[5.33]	123.8	[4.88]
387206615	387207215	387207815		15	145.0	[5.71]	133.4	[5.25]
387206616	387207216	387207816	387291208	16	154.5	[6.08]	142.9	[5.63]
387206617	387207217	387207817		17	164.0	[6.46]	152.4	[6.00]
387206618	387207218	387207818		18	173.6	[6.83]	161.9	[6.38]
387206619	387207219	387207819		19	183.1	[7.21]	171.5	[6.75]
387206620	387207220	387207820		20	192.6	[7.58]	181.0	[7.13]
387206621	387207221	387207821		21	202.1	[7.96]	190.5	[7.50]
387206622	387207222	387207822	387291210	22	211.7	[8.33]	200.0	[7.88]
387206623	387207223	387207823		23	221.2	[8.71]	209.6	[8.25]
387206624	387207224	387207824		24	230.7	[9.08]	219.1	[8.63]
387206625	387207225	387207825		25	240.2	[9.46]	228.6	[9.00]
387206626	387207226	387207826		26	249.8	[9.83]	238.1	[9.38]

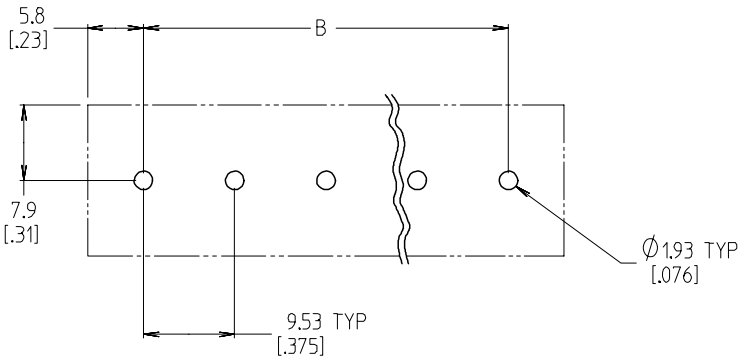

RECOMMENDED PTH PATTERN

SEE SHEET ONE
EC NO: ETC2007-0432 2007/05/30
DRWN: CLYORK 2007/06/10
CHKD: JMACNEIL 2007/06/11
APPR: JMACNEIL 2007/06/11
DESCRIPTION
REV

QUALITY SYMBOLS
▼=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± .005
2 PLACES	± 0.13	± .01
1 PLACE	± 0.3	± ---
ANGULAR ± 2 °		

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM/IN
SCALE: 2:1
DESIGN UNITS: INCH
THIRD ANGLE PROJECTION

		DRAWN BY	DATE
		C. YORK	2004/01/21
		CHECKED BY	DATE
		R. KEMP	2004/01/26
		APPROVED BY	DATE
		P. WALTZ	2004/01/26

TITLE: 9.53MM SR BTS, PC TERM. ASSY, WITH PADS, NO MTG ENDS

MOLEX INCORPORATED

MATERIAL NO.: SEE CHART
DOCUMENT NO.: SD-38720-003
SHEET NO.: 2 OF 2
SIZE: B

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION