
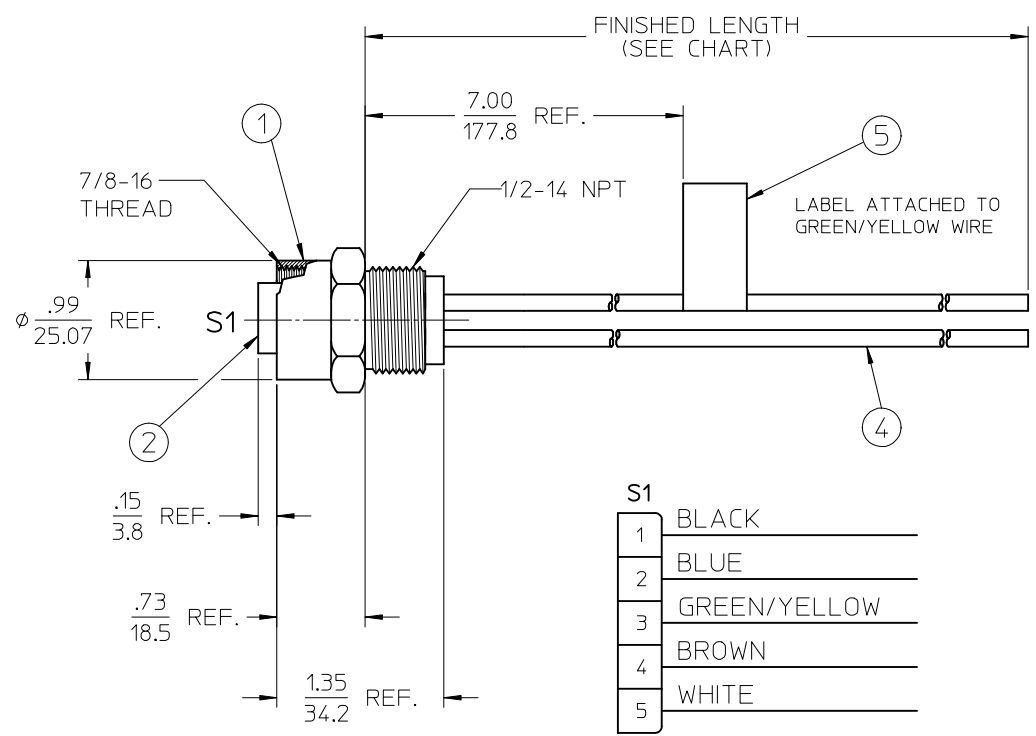


10	9	8	7	6	5	4	3	2	130013
MATERIAL NO.	ENGINEERING NO.	FINISHED LENGTH							
1300138076	1R5000A80M010	3' 4" +2.19"/-0 (1.0M +55.6mm/-0)							
1300138077	1R5000A80M020	6' 7" +3.50"/-0 (2.0M +88.9mm/-0)							

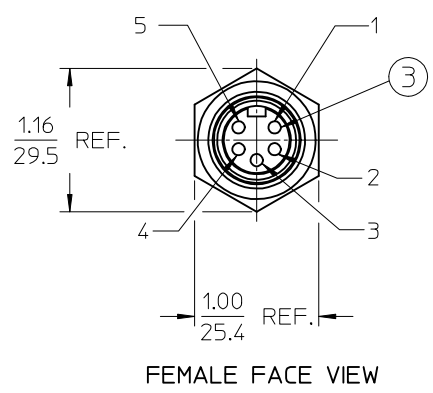

S1	
1	BLACK
2	BLUE
3	GREEN/YELLOW
4	BROWN
5	WHITE

NOTES:
1. MATERIAL: SEE TABLE
2. FINISHES: SEE TABLE
3. ELECTRICAL SPECIFICATIONS
VOLTAGE RATING: 300V AC/DC
CURRENT RATING: 8 AMPS
4. PROTECTION: IP67
5. ASSEMBLY IS RoHS COMPLIANT
BY EXEMPTION

5	1	FLAG LABEL	MYLAR	BLACK/YELLOW
4	A/R	WIRE, 1.5mm ² (16 AWG) (UL 1015)	PVC INSULATION	SEE WIRE DIAGRAM
3	5	CONTACT SOCKET	Cu ALLOY	GOLD PLATED
2	1	INSERT, 5P	PUR	BLACK
1	1	RECEPTACLE SHELL	ZINC DIE-CAST	NICKEL PLATED
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH

RELEASED

EC NO: IPG2013-0559

2012/11/13

DRW:RSTONE

2012/11/26

CHK:K JOZWIK

2012/12/18

APPR:JFMURPHY

REV

QUALITY SYMBOLS

▽=0

▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± .005	± .0004
3 PLACES	± .005	± .0004
2 PLACES	± .005	± .0004
1 PLACE	± .005	± .0004
0 PLACE	± .005	± .0004

DIMENSION STYLE

IN/MM

DRAWN BY

DATE

CHECKED BY

DATE

APPROVED BY

DATE

MATERIAL NO.

SIZE

SEE CHART

SCALE

1:1

DESIGN UNITS

INCH

THIRD ANGLE PROJECTION

TITLE

MINI CHANGE RECEPTACLE ASSY. 5 POLE FEMALE 1.5MM² (16 AWG)

DOCUMENT NO.

SD-130013-038

SHEET NO.

1 OF 1

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION