




REV.	REVISION	DATE

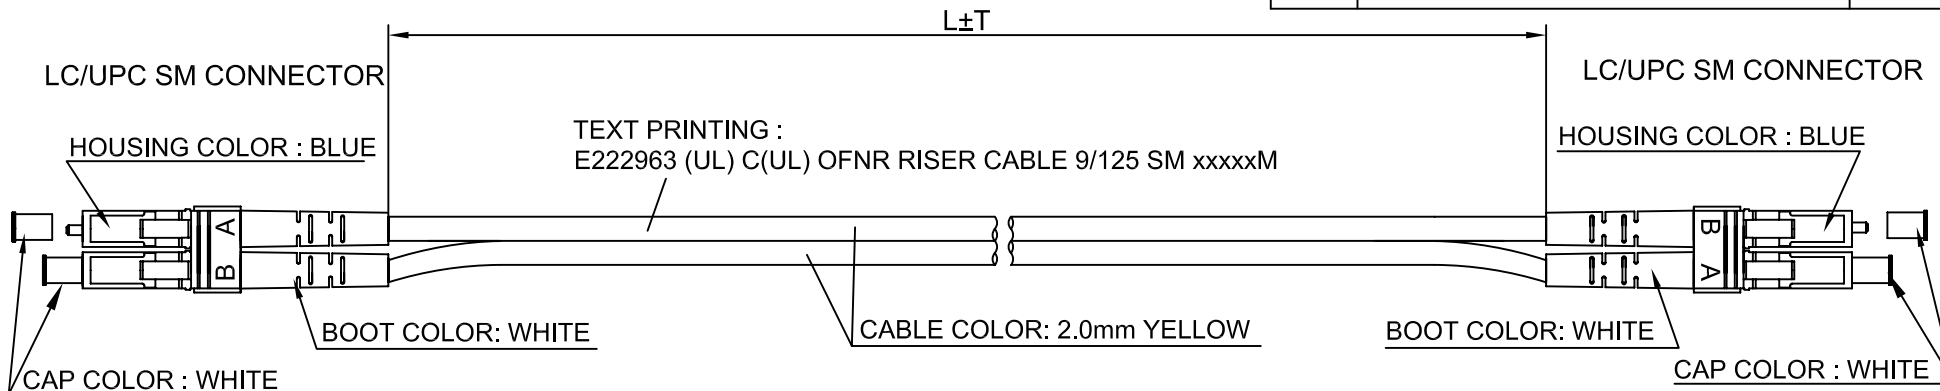

(YOKE FACE UP)



(YOKE FACE UP)

DFSM-LCLC-XX
 xxM LC/LC SM 9/125, DUPLEX RISER
 QTY. 1
www.bb-elec.com

DETAIL A


NOTES:

1. INSERTION LOSS < 0.5dB.
2. RETURN LOSS: CONNECTOR 1 > 55dB, CONNECTOR 2 > 55dB
3. OPERATION TEMP: -20°C TO +60°C
4. YELLOW PVC OUTER JACKET
5. INDIVIDUALLY BAGGED AND LABELED, (SEE DETAIL A)

CHART

PART NO.	XX	L	T	BARCODE
DFSM-LCLC-10M	10	32.8'(10000)	+2"/-0(+50/-0)	
DFSM-LCLC-5M	5	16.4'(5000)	+2"/-0(+50/-0)	
DFSM-LCLC-3M	3	9.84'(3000)	+2"/-0(+50/-0)	
DFSM-LCLC-2M	2	6.56'(2000)	+2"/-0(+50/-0)	
DFSM-LCLC-1M	1	3.28'(1000)	+2"/-0(+50/-0)	

B&B Electronics Manufacturing Co.

	UNIT: Inches[mm]	TITLE: xxM DUPLEX 9/125 SINGLE MODE LC/LC RISER JUMPER YELLOW CABLE WITH CLIPS	
	DRAWN BY A. MEDINA	DATE 09/18/2008	
CHECKED BY	DATE	DRAWING NO. C.D. 2387	REV. A
APPROVED BY	DATE	REF:	
P.O. NO.:	DATE	PART NO. DFSM-LCLC-XX	