


Rev	AWO #	Description	Date	Appr
-		RELEASED	12/11/06	


APPROVED: _____

DATE: _____ TITLE: _____

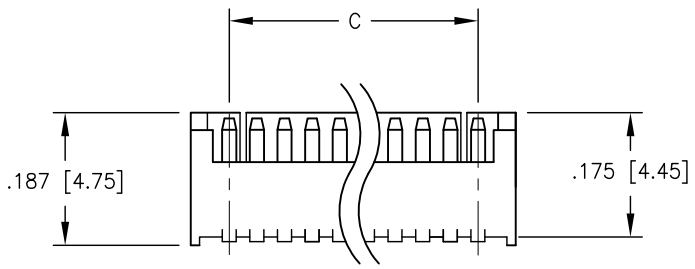

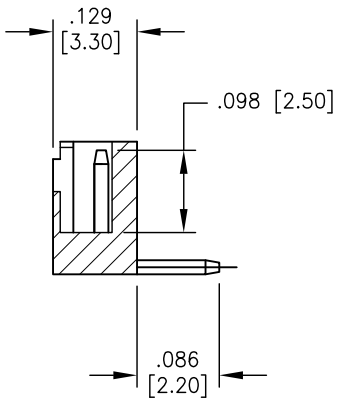

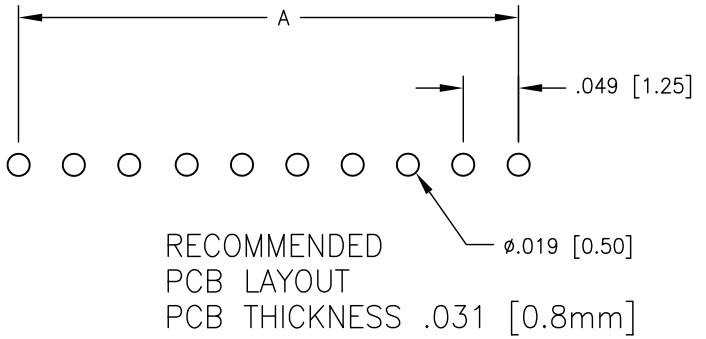

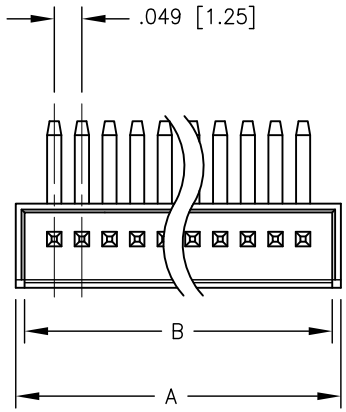

CIRCUITS	DIM A	DIM B	DIM C
2	.167 [4.25]	.120 [3.05]	.049 [1.25]
3	.216 [5.50]	.169 [4.30]	.098 [2.50]
4	.265 [6.75]	.218 [5.55]	.147 [3.75]
5	.314 [8.00]	.267 [6.80]	.196 [5.00]
6	.364 [9.25]	.316 [8.05]	.246 [6.25]
7	.413 [10.50]	.366 [9.30]	.295 [7.50]
8	.462 [11.75]	.415 [10.56]	.344 [8.75]
9	.511 [13.00]	.464 [11.80]	.393 [10.00]
10	.561 [14.25]	.513 [13.05]	.442 [11.25]
11	.610 [15.50]	.562 [14.30]	.492 [12.50]
12	.659 [16.75]	.612 [15.55]	.541 [13.75]
13	.708 [18.00]	.661 [16.80]	.590 [15.00]
14	.757 [19.25]	.710 [18.05]	.639 [16.25]
15	.807 [20.50]	.759 [19.30]	.688 [17.50]

SPECIFICATIONS:
Material:
Insulator: Nylon 46, rated UL 94V–0
Insulator color: White
Contacts: Brass
Plating:
Tin over Nickel underplate overall
Electrical:
Operating voltage: 250 VAC max
Current rating: 1 Amps max
Contact resistance: 20 mohms max
Insulation resistance: 500 Mohms min
Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating:
Operating temperature: –25°C to +85°C
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MILLIMETERS
TOLERANCES: EXCEPT AS NOTED

.X ± .30
.XX ± .20

APPROVALS		DATE
DRAWN	BW	12/11/06
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
1.25mm WAFER
DIP RIGHT ANGLE

SIZE	PART NO.	REV.
X	125SH-A-XX-TR	A

REF: | SCALE: NTS | SHEET 1 OF 1