



QLSP15RGB  
Reverse Mount  
Tri color RGB



## Product Outline:

This is a reverse mountable Tri color LED with AlInGaP Red and InGaN Blue & Green color. With small footprint and compact size, this package is ideal for status indication.

## Features:

- Package in 8mm tape on 7" diameter reel
- Compatible with automatic placement equipment.
- Compliance with EU REACH
- RoHS compliant
- Compatible with infrared and vapor phase reflow solder process.
- Custom Bin available upon special request
- View angel  $>120^\circ$
- Color: AlInGaP Red / InGaN Blue & Green


## Application:

- Backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD switch and symbol.
- General use.

## Compliance and Certification:




## Mechanical Property: (Dimension)

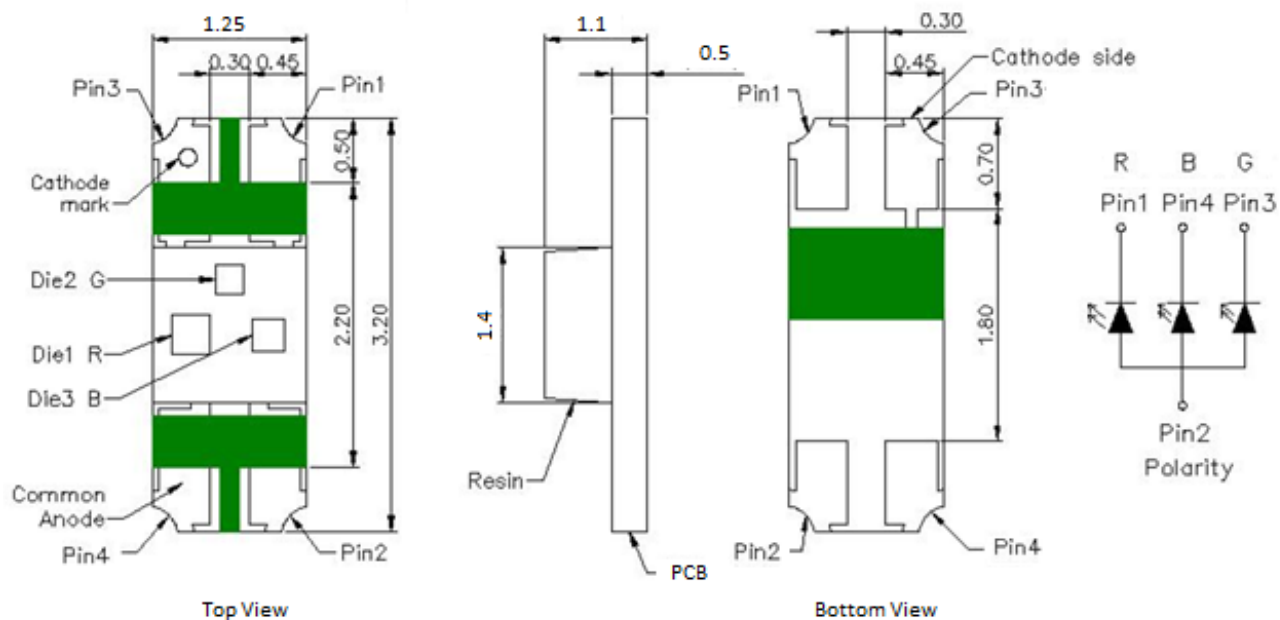

- \* All dimensions are in millimeters,
- \* Tolerances are  $\pm 0.10\text{mm}$ .

## Recommended Solder footprint:

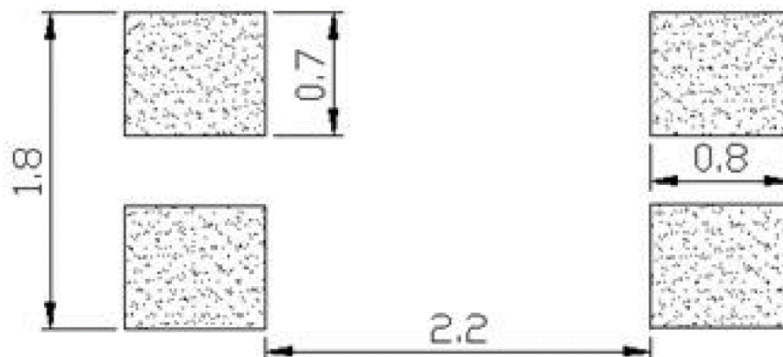

- \* All dimensions are in millimeters.
- \* Reflow soldering must not be performed more than twice.



# Characteristics

## ■ Absolute Maximum Ratings

(Ta=25°C)

| Color     | P <sub>D</sub> (mW) | I <sub>F</sub> (mA) | I <sub>FP</sub> * (mA) | T <sub>OP</sub> (°C) | T <sub>ST</sub> (°C) | V <sub>R</sub> (V) |
|-----------|---------------------|---------------------|------------------------|----------------------|----------------------|--------------------|
| R (Red)   | 50                  | 20                  | 100                    | -40 ~ 85             | -40 ~ 85             | 5                  |
| B (Blue)  | 65                  | 20                  | 60                     | -40 ~ 85             | -40 ~ 85             | 5                  |
| G (Green) | 80                  | 20                  | 80                     | -40 ~ 85             | -40 ~ 85             | 5                  |

\*I<sub>FP</sub>: is pulse @ 1/10 duty cycle and 0.1ms

## ■ Electrical / Optical Characteristic

(Ta=25 °C)

(AlInGaP RED)

| Parameter           | Symbol         | Min. | Typ. | Max. | Unit | Condition            |
|---------------------|----------------|------|------|------|------|----------------------|
| Luminous Intensity  | I <sub>v</sub> |      | 180  |      | mcd  | I <sub>F</sub> =20mA |
| Peak Wavelength     | λ <sub>p</sub> |      | 632  |      | nm   |                      |
| Dominant Wavelength | λ <sub>d</sub> |      | 624  |      | nm   |                      |
| Forward Voltage     | V <sub>f</sub> | 1.9  |      | 2.4  | V    |                      |
| View Angle          | θ              |      | 120  |      | deg  |                      |

(InGaN Green)

| Parameter           | Symbol         | Min. | Typ. | Max. | Unit | Condition            |
|---------------------|----------------|------|------|------|------|----------------------|
| Luminous Intensity  | I <sub>v</sub> |      | 600  |      | mcd  | I <sub>F</sub> =20mA |
| Peak Wavelength     | λ <sub>p</sub> |      | 523  |      | nm   |                      |
| Dominant Wavelength | λ <sub>d</sub> |      | 525  |      | nm   |                      |
| Forward Voltage     | V <sub>f</sub> |      |      | 3.4  | V    |                      |
| View Angle          | θ              |      | 120  |      | deg  |                      |



(InGaN Blue)

| Parameter           | Symbol         | Min. | Typ. | Max. | Unit | Condition            |
|---------------------|----------------|------|------|------|------|----------------------|
| Luminous Intensity  | I <sub>v</sub> |      | 130  |      | mcd  | I <sub>F</sub> =20mA |
| Peak Wavelength     | λ <sub>p</sub> |      | 470  |      | nm   |                      |
| Dominant Wavelength | λ <sub>d</sub> |      | 472  |      | nm   |                      |
| Forward Voltage     | V <sub>f</sub> |      |      | 3.4  | V    |                      |
| View Angle          | θ              |      | 120  |      | deg  |                      |

(1) Tolerance of Dominant Wavelength ±1nm

(2) Tolerance of measurement: V<sub>F</sub>=+/- 0.1V

(3) Tolerance of Luminous Intensity: ±11%

## Binning

**Brightness: ( R&G&B )**

|             | Low ( mcd ) | High ( mcd ) |
|-------------|-------------|--------------|
| <b>Full</b> | <b>100</b>  | <b>600</b>   |
| <b>1</b>    | <b>100</b>  | <b>200</b>   |
| <b>2</b>    | <b>200</b>  | <b>300</b>   |
| <b>3</b>    | <b>300</b>  | <b>400</b>   |
| <b>4</b>    | <b>400</b>  | <b>600</b>   |
| <b>5</b>    | <b>550</b>  | <b>750</b>   |

**V<sub>f</sub>: ( R )**

|           | Low ( V )  | High ( V ) |
|-----------|------------|------------|
|           |            |            |
| <b>A1</b> | <b>1.9</b> | <b>2.2</b> |
| <b>B1</b> | <b>2.1</b> | <b>2.4</b> |
|           |            |            |

**V<sub>f</sub>: ( B&G )**

|          | Low ( V )  | High ( V ) |
|----------|------------|------------|
| <b>X</b> | <b>2.8</b> | <b>3.2</b> |
| <b>Y</b> | <b>3.0</b> | <b>3.4</b> |
|          |            |            |




**Color: ( R&G&B )**

|                            | <b>Low ( nm )</b> | <b>High ( nm )</b> |
|----------------------------|-------------------|--------------------|
|                            |                   |                    |
| <b>Full ( Blue ) = FB</b>  | <b>465</b>        | <b>475</b>         |
| <b>Full ( Red ) = FR</b>   | <b>615</b>        | <b>625</b>         |
| <b>Full ( Green ) = FG</b> | <b>518</b>        | <b>524</b>         |



## Characteristic Curves

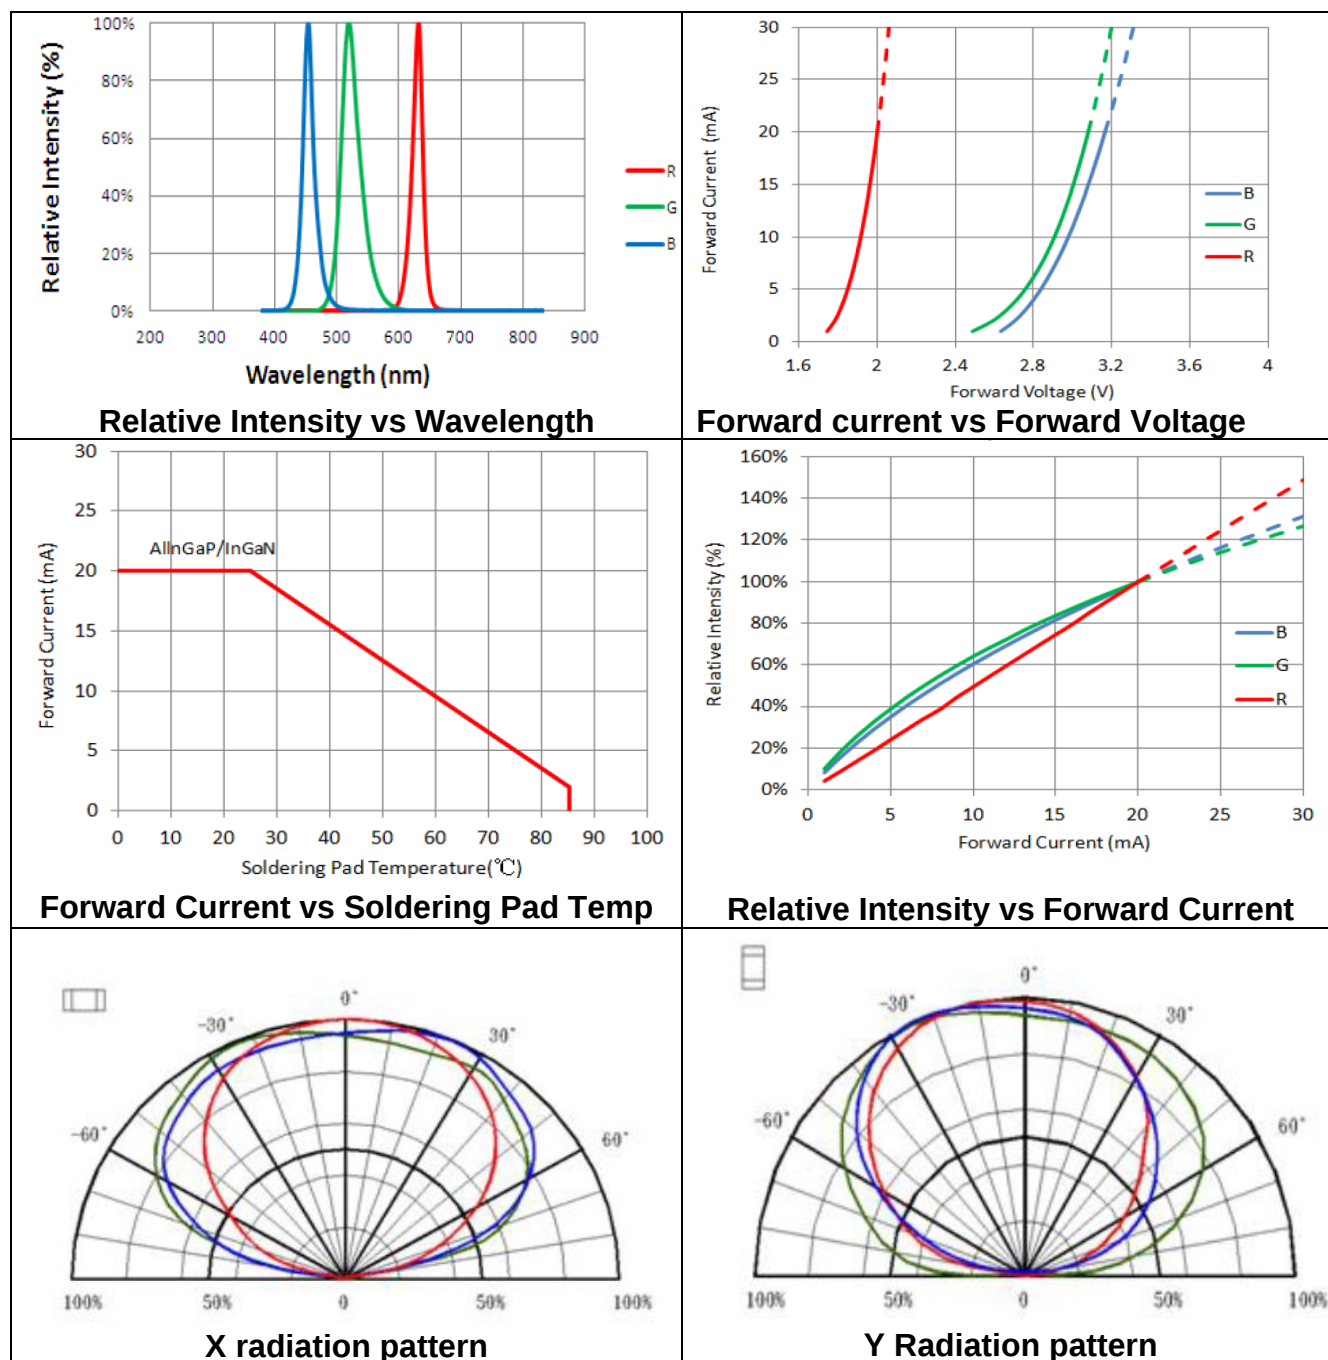

## ■ Reliability test:

| No | Item                                                       | Condition                                            | Time/Cycle | Sample size |
|----|------------------------------------------------------------|------------------------------------------------------|------------|-------------|
| 1  | Steady State Operating Life of Room Temperature            | 25°C Operating                                       | 1000 Hrs   | 20 pcs      |
| 2  | Steady State Operating Life of Low Temperature -40°C       | -40°C Operating                                      | 1000 Hrs   | 20 pcs      |
| 3  | Steady State Operating Life of Low Temperature 60°C        | 60°C Operating                                       | 1000 Hrs   | 20 pcs      |
| 4  | Steady State Operating Life of Low Temperature 85°C        | 85°C Operating                                       | 1000 Hrs   | 20 pcs      |
| 5  | Low temperature storage -40°C                              | -40°C Storage                                        | 1000 Hrs   | 20 pcs      |
| 6  | High temperature storage 100°C                             | 100°C Storage                                        | 1000 Hrs   | 20 pcs      |
| 7  | Steady State Operating Life of High Humidity Heat 60°C 90% | 60°C/90% Operating                                   | 1000 Hrs   | 20 pcs      |
| 8  | Steady State Pulse Operating Life Condition                | 25°C 10Hz duty=1/10 Operating                        | 200 Cycle  | 20 pcs      |
| 9  | Resistance to soldering heat on PCB (JEDEC MSL3)           | pre-store@60°C, 60%RH for 52hrs Tsltd max.=260 10sec | 3 Times    | 20 pcs      |
| 10 | Heat Cycle Test (JEDEC MRC)                                | 25°C~65°C~-10°C, 90%RH, 24hr/1cycle                  | 10 Cycle   | 20 pcs      |
| 11 | Thermal shock                                              | -40°C / 20min~ 5min~100°C /20min                     | 300 Cycle  | 20 pcs      |


## ■ Judgment Criteria:

| Item            | Symbol | Test Condition | Judgment Criteria   |
|-----------------|--------|----------------|---------------------|
| Forward Voltage | Vf     | R : IF=20 mA   | $\Delta V_f < 10\%$ |
| Luminous Flux   | Iv     |                | $\Delta I_v < 30\%$ |



## Solder Profile:

-The recommended reflow soldering profile is as follows (temperatures indicated are as measured on the surface of the LED resin):


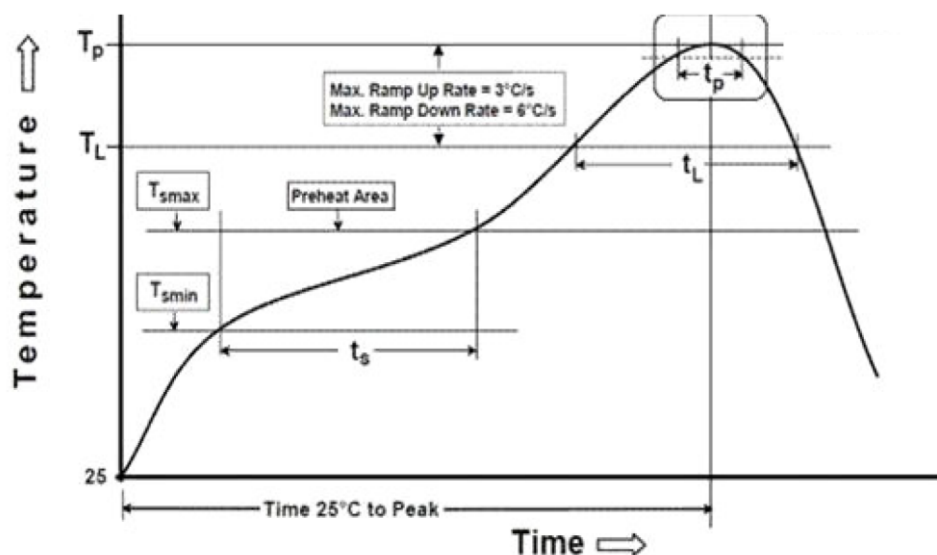


| Profile Feature                                                      | Sn-Pb Eutectic Assembly | Pb-Free Assembly |
|----------------------------------------------------------------------|-------------------------|------------------|
| Temperature Min(T <sub>smin</sub> )                                  | 100°C                   | 150°C            |
| Temperature Max(T <sub>smax</sub> )                                  | 150°C                   | 200°C            |
| Time(t <sub>a</sub> ) from (T <sub>smin</sub> to T <sub>smax</sub> ) | 60-120 seconds          | 60-120 seconds   |
| Ramp-up rate(T <sub>L</sub> to T <sub>p</sub> )                      | 3°C/second max.         | 3°C/second max.  |
| Liquidous Temperature(T <sub>L</sub> )                               | 183°C                   | 217°C            |
| Time(t <sub>L</sub> ) maintained above T <sub>L</sub>                | 60-150 seconds          | 60-150 seconds   |
| Peak package body temperature(T <sub>p</sub> )                       | 235°C                   | 260°C            |
| Time within 5°C of Actual Peak temperature (t <sub>p</sub> )         | 20seconds*              | 30 seconds*      |
| Ramp-down rate(T <sub>p</sub> to T <sub>L</sub> )                    | 6°C/second max.         | 6°C/second max.  |
| Time 25°C to peak temperature                                        | 6 minutes max.          | 8 minutes max.   |

\* Tolerance for peak profile temperature (T<sub>p</sub>) is defined as a supplier minimum and a user maximum.




## Taping & Packing:

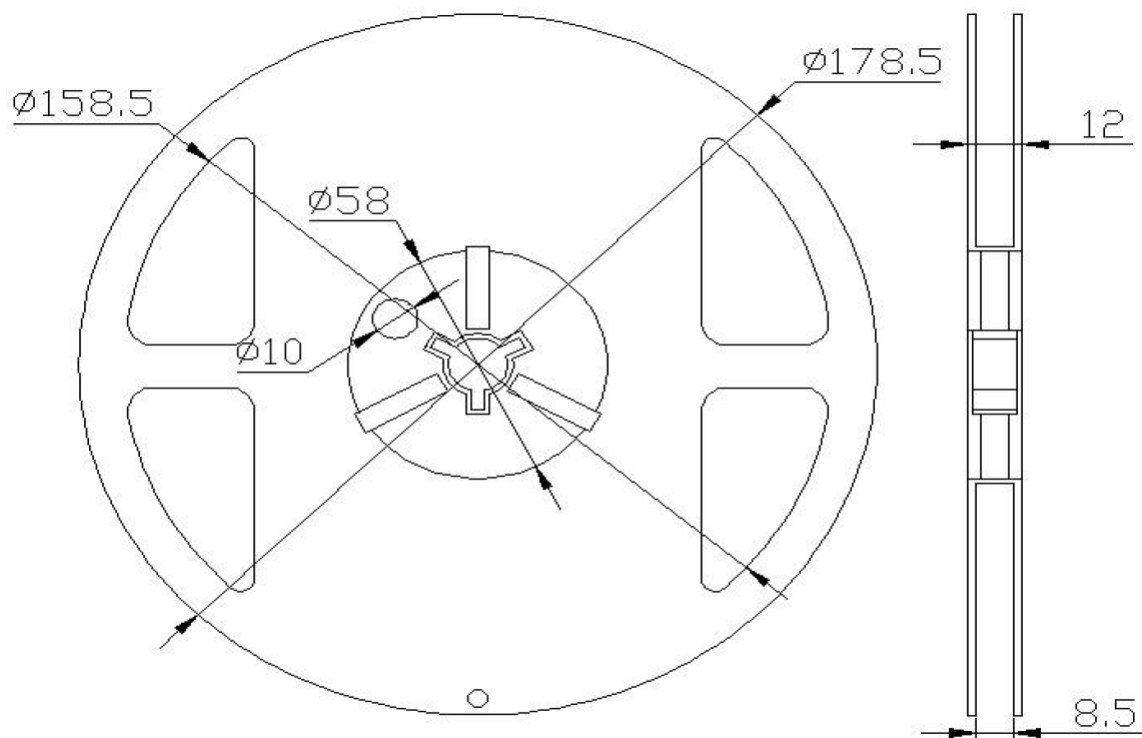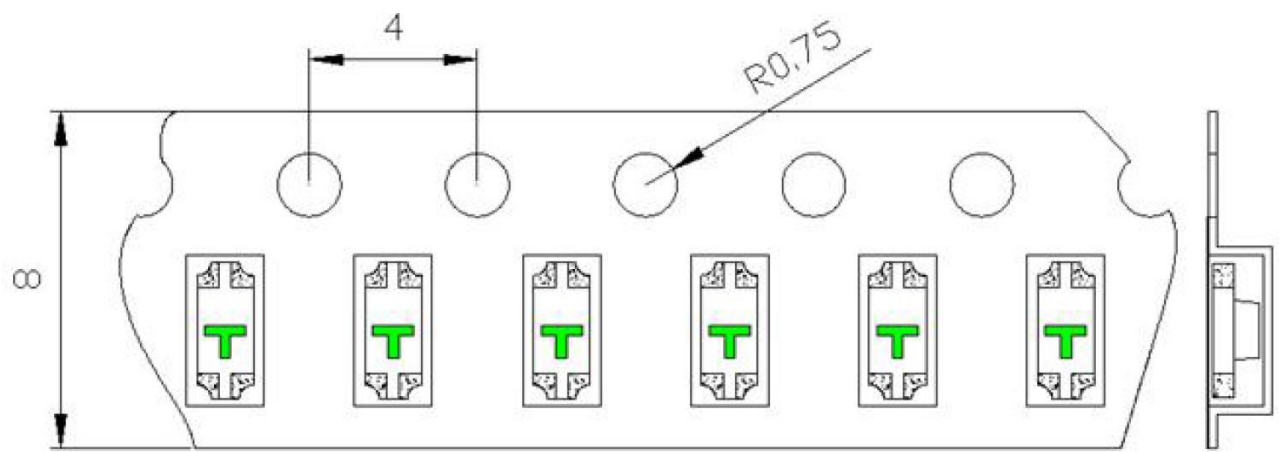

Unit : mm



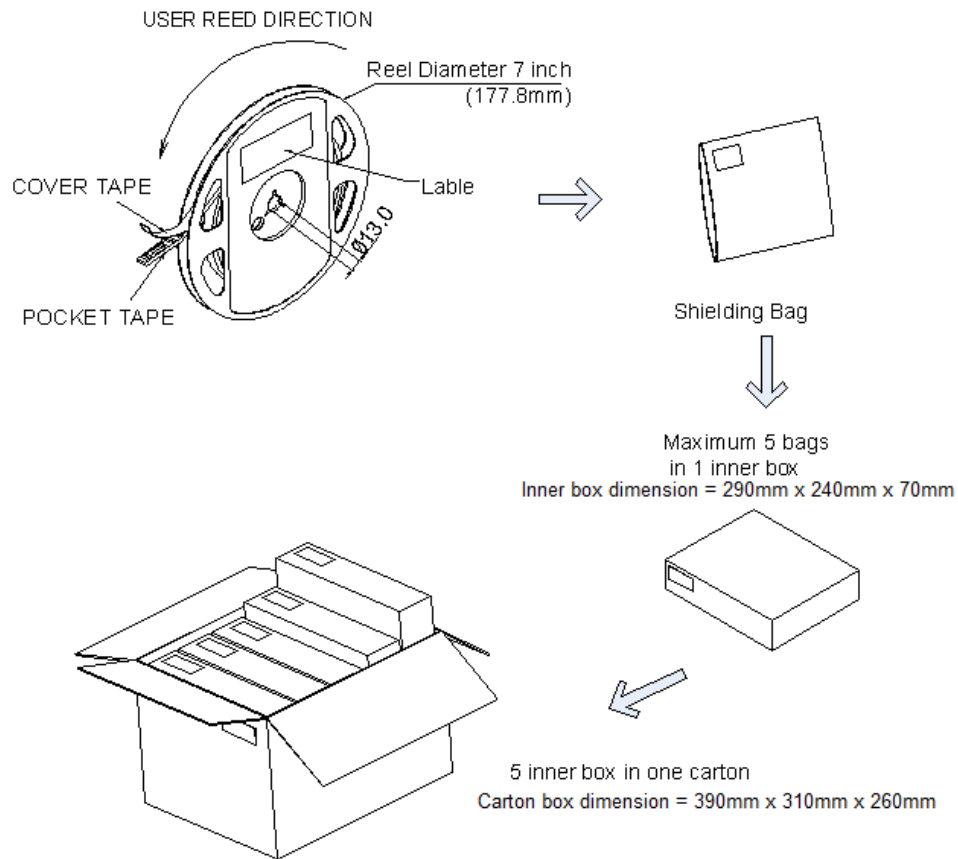

## Labeling

  
**Quantity: XXXX**



  
**Quelighting P/N: XXXXXX**

  
**Lot number: XXXXX**

**Iv Bin: XX**

**Color Bin: XX**

**Vf Bin: XX**

**Date Code: XXXX**



**Ordering Information:**

| Part #    | Multiple Quantities | Quantity per Reel |
|-----------|---------------------|-------------------|
| QLSP15RGB |                     | 3000 pcs          |
|           |                     |                   |
|           |                     |                   |
|           |                     |                   |
|           |                     |                   |
|           |                     |                   |



**Revision History:**

| Revision Date: | Changes:        | Version #: |
|----------------|-----------------|------------|
| 2-5-2021       | Initial release | 1.0        |
|                |                 |            |
|                |                 |            |
|                |                 |            |
|                |                 |            |
|                |                 |            |

