

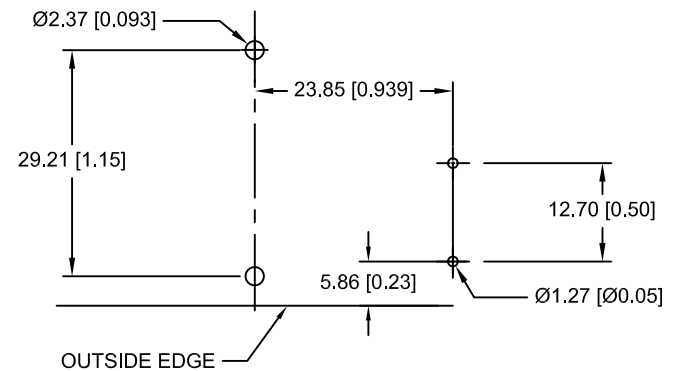
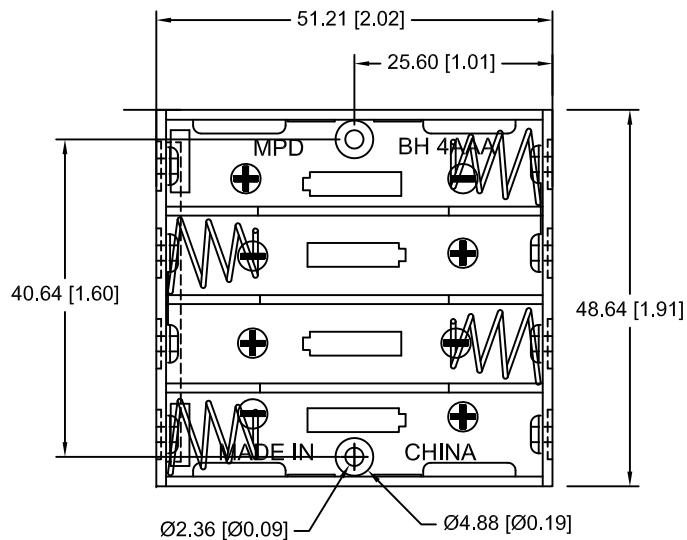


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
5/27/06	A	REDRAWN, ADDED "ROHS COMPLIANT". UPDATED NOTES	T.B.	B.S.	
03/22/13	B	UPDATED TO "ROHS 2 COMPLIANT"	T.B.	B.S.	
06/14/13	C	UPDATED TITLE	T.B.	B.S.	

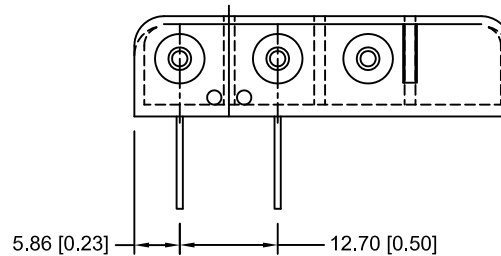


PCB LAYOUT

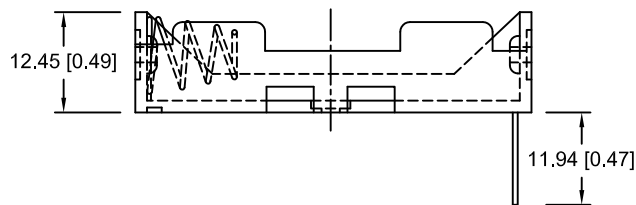

**NOTES:**  
**1. MATERIAL:**  
 HOUSING : HIGH IMPACT NYLON 66, HALOGEN AND PHOSPHOR FREE, UL94V-0, UL FILE NO. E48285  
 RIVETS: BRASS, NICKLE PLATED.  
 SPRING: 302 STAINLESS STEEL, NICKLE PLATED.  
 CROSSOVER WIRE: 24AWG, UL1007, CSA, TR64  
 PC PINS: 302 STAINLESS STEEL, NICKEL PLATED.  
 TEMPERATURE RANGE: -40°C TO +140°C  
 RESISTANT TO SOLVENTS, COMMON OILS AND REFRIGERANTS  
 ROHS 2 COMPLIANT

**MOUNTING INSTRUCTION:**  
 USE 2-56 MACHINE SCREWS OR EYELETS 0.089" OD BY 0.15" FLANGE STIMPSON GS-3 SERIES OR EQUIVALENT. ALSO ADHESIVES AND DOUBLE SIDED TAPES WORK WELL.

Tolerance (Except as noted)	 <b>Memory Protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735	Scale	Drawn By B.S.
			Approved By T.B.
decimal ±.5 (.020)	Title FOUR "AAA" CELL HOLDER WITH PC PINS		
Fractional ± .8 (.030)		Date 06/14/13	Drawing Number BH4AAAPC
Angular ± 3°			