

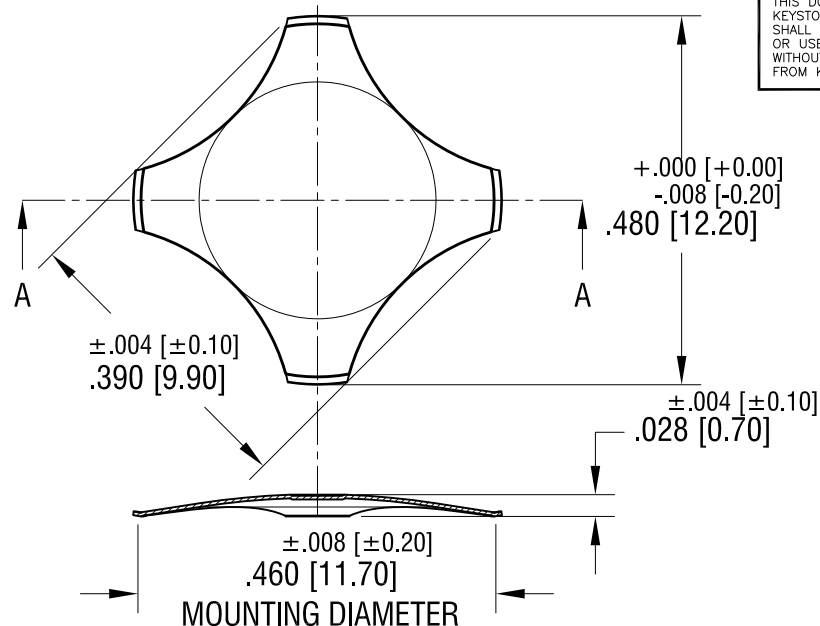


ACTUAL SIZE



SECTION A-A

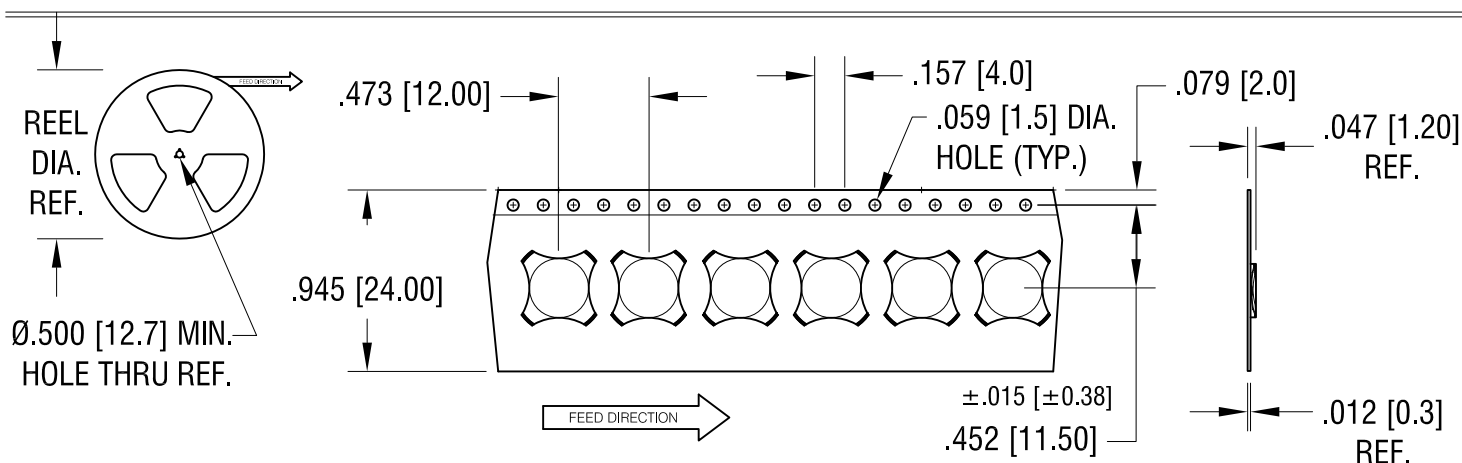

NOTES: SUPPLIED ON TAPE AND REEL ONLY

1. VOLTAGE/CURRENT MAXIMUM: 12mA@ 24 Volts DC
2. OPERATING TEMPERATURE: -40°C TO 105°C
3. STORAGE TEMPERATURE: -55°C TO 125°C
4. MAT'L: .004 [0.10] STAINLESS STEEL
5. FINISH: NICKEL PLATE
6. TRIP FORCE: 340g

TAPE AND REEL SPECIFICATIONS:

1. TAPE:
MAT'L - ALL CONDUCTIVE POLYSTYRENE CARRIER
ANSI/EIA-481 STANDARD
2. REEL:
13.0 [330.2] DIA. 4000 PIECES PER REEL

KEYSTONE ELECTRONICS CORP.

www.keyelco.com • NEW HYDE PARK, NY 11040 • Tel (516) 328-7500

PART NAME

MAXI 4 LEG DOME

MATERIAL

AS NOTED

FINISH

DRN BY

DATE

© 1515

AS NOTED

NI

[illegible]

2.15.1

TOLERANCES	INCH	[MM]
DECIMAL	$\pm .005$	$[\pm 0.13]$
ANGULAR	$\pm 1^\circ$	
UNLESS OTHERWISE SPECIFIED		

CODE

DWG NO	
--------	--

C

5175TR

9.11.20	CHANGE AS PER ECN 20-079
---------	--------------------------

A

DATE _____

DESCRIPTION

REV.