
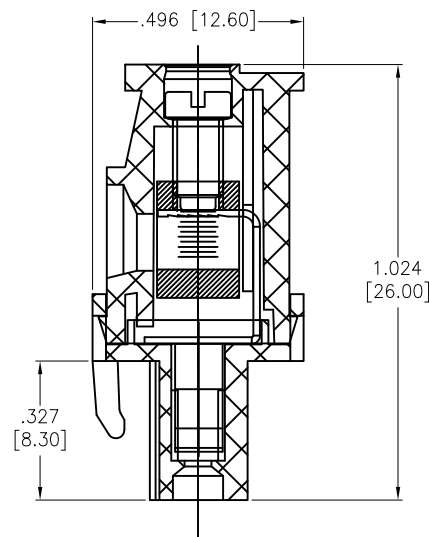
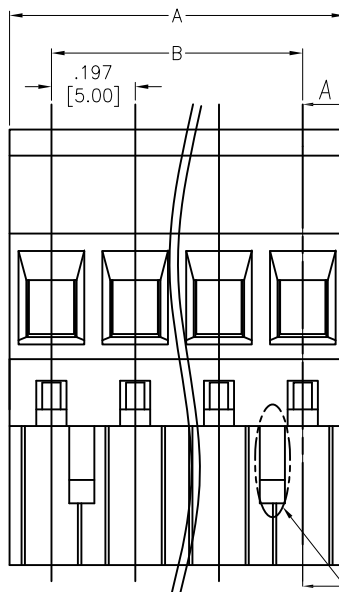


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	9/18/14	
A		UPDATE DRAWING	9/27/19	OW/RC



Only This Notch on 2P

SECTION A-A

SPECIFICATIONS:

Material:
 Insulator: PA66, rated UL 94V-0
 Insulator color: Green
 Screws: M3, Steel, Zinc plated
 Clamp: Phosphor Bronze, Nickel plated
 Cage: Brass, Nickel plated
 Electrical:
 Voltage rated: 300V
 Current rating: 15A
 Contact resistance: 20 mohms
 Insulation resistance: 500 Mohms @ 500 VDC
 Dielectric withstanding voltage: 2,000 VAC for 1 minute
 Mechanical:
 Wire range: 28-14AWG, 1.5mm²
 Torque: 0.5Nm, 4.5Lb-in
 Wire strip length: 7-8mm
 Temperature Rating:
 -40°C to +105°C
 Environmental:
 Lead free, RoHS compliant.



Positions: 02 thru 24
 A = .197 [5.00] x No. of Positions
 B = .197 [5.00] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES <table><tr><td>.X</td><td>± .10</td><td>Ø.X</td><td>±.10</td></tr><tr><td>.XX</td><td>± .020</td><td>Ø.XX</td><td>± .015</td></tr><tr><td>.XXX</td><td>± .015</td><td>Ø.XXX</td><td>± .010</td></tr></table>		.X	± .10	Ø.X	±.10	.XX	± .020	Ø.XX	± .015	.XXX	± .015	Ø.XXX	± .010	ADAM TECH INTERCONNECTS 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
		.X	± .10	Ø.X	±.10										
		.XX	± .020	Ø.XX	± .015										
		.XXX	± .015	Ø.XXX	± .010										
		TITLE													
EURO BLOCK, .197 [5.00] PITCH															
APPROVALS		DATE													
DRAWN	HR	9/18/14													
CHECKED	SY	9/18/14													
APPROVED															

SIZE	PART NO.	REV.
X	EB9A-XX-C	A
REF:	S00067C	SCALE: NTS
		SHEET 1 OF 1