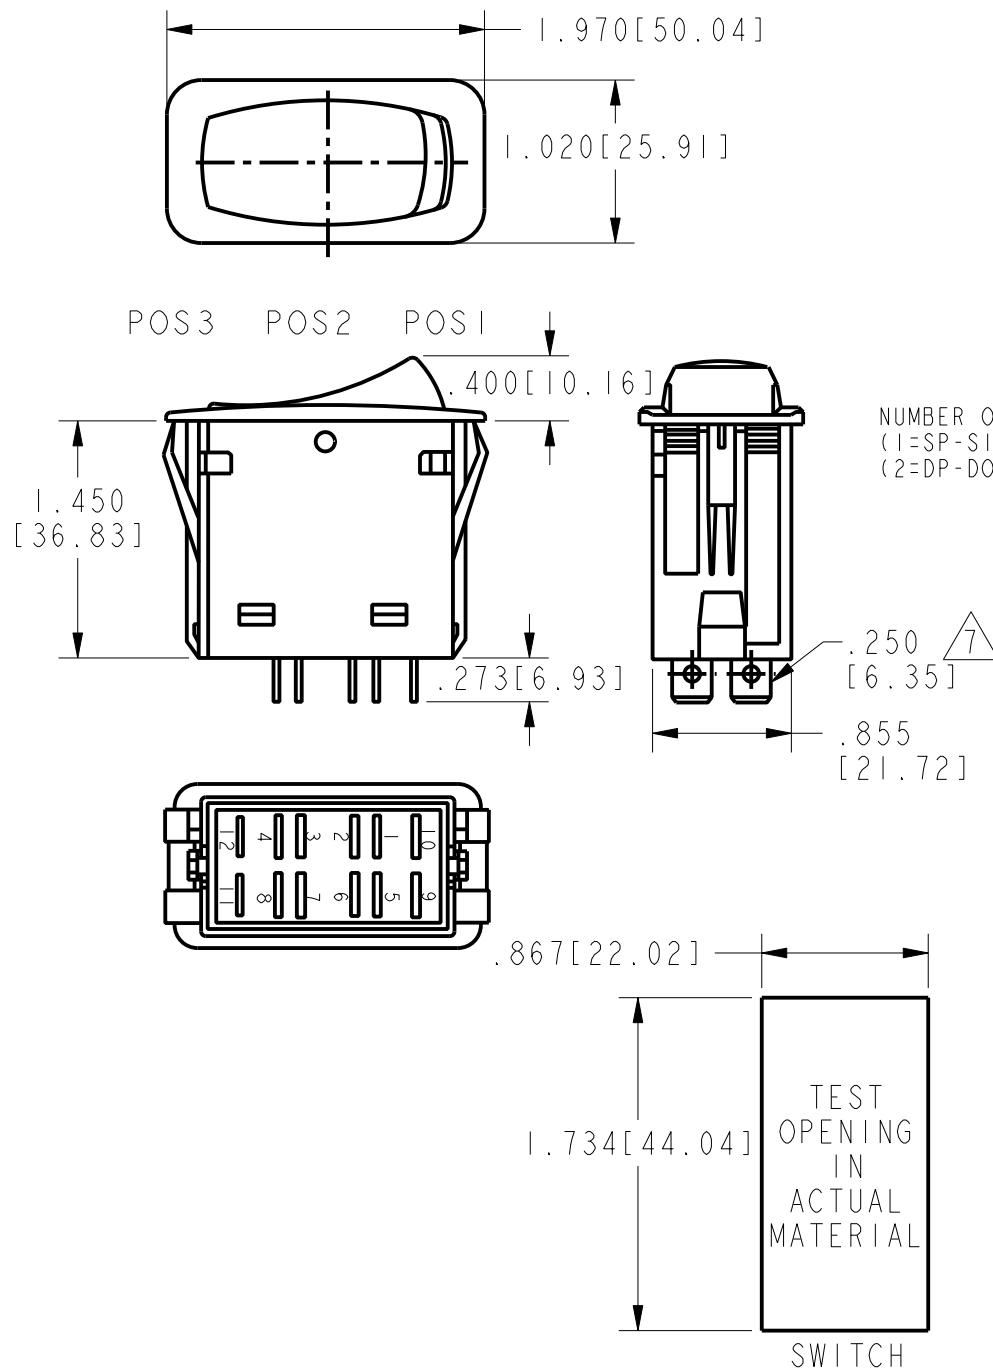


HONEYWELL
PART NUMBER

4

REV	DOCUMENT	CHANGED BY	CHECK
A	0016296	LKM 24OCT05	VA

ACTUATOR COLOR (B=BLACK,
G=GRAY, R=RED, W=WHITE)


CIRCUITRY (SEE TABLE)

BASE/BEZEL COLOR (B=BLACK,
G=GRAY, R=RED, W=WHITE)NUMBER OF POLES
(1=SP-SINGLE POLE, USES TERMINAL 1-2-4)
(2=DP-DOUBLE POLE, USES TERMINALS 1-2-4 AND 5-6-8)

TERMINAL STYLE 7

.250 [6.35] WIDE QUICK
CONNECT TABS 7
.187 [4.76] WIDE QUICK
CONNECT TABS 7

	CIRCUIT MADE WITH ROCKER IN 5		
	POSITION 3 (1&2, 5&6)	POSITION 2	POSITION 1 (2&4, 6&8)
1	ON	OFF	ON
2	OFF	NONE	ON
3	ON	NONE	ON
4	(OFF)	NONE	ON
5	(ON)	OFF	ON
6	OFF	NONE	(ON)
7	(ON)	OFF	(ON)
8	(ON)	NONE	ON

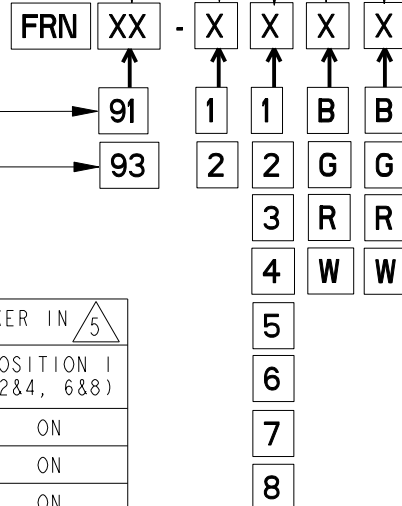ELECTRICAL RATING
& APPROVALS 7FOR .250 WIDE TABS: 20A, 12V
FOR .187 WIDE TABS: 15A, 12V

NOTES

- 1 - OPERATING TEMPERATURE RANGE: -40°F TO +185°F
(-40°C TO +85°C)
- 2 - ELECTRICAL LIFE: 50,000 CYCLES MOMENTARY,
100,000 CYCLES MAINTAINED.
- 3 - MECHANICAL LIFE: 250,000 CYCLES MIN
- 4 - SEE DIAGRAM FOR CATALOGING SCHEME
- 5 - PARENTHESIS DENOTE MOMENTARY ACTION
- 6 - SEALED TO IP67
- 7 - TERMINAL WIDTH AND ELECTRICAL RATING DEPENDENT ON
STYLE SELECTED

DESIGN UNITS: INCH
TOLERANCES UNLESS NOTED:

NO PLACE	X	±	0.040
ONE PLACE	.X	±	0.030
TWO PLACE	.XX	±	0.015
THREE PLACE	.XXX	±	0.015
FOUR PLACE	.XXXX	±	.0005
ANGLES	X	±	2

THIRD ANGLE PROJECTION



DRAWN	CR	13 JUN 05
CHECK	RJ	13 JUN 05

THIS DRAWING COVERS A PROPRIETARY ITEM
AND IS THE PROPERTY OF HONEYWELL.
THIS DRAWING IS NOT TO BE COPIED OR USED
WITHOUT THE PERMISSION OF HONEYWELL.INTERPRET PER ASME Y14.5M-1994
OTHER HONEYWELL ENGINEERING
STANDARDS MAY APPLY

Pro/ENGINEER 2D

Honeywell

TITLE

SWITCH, ROCKER

SIZE	TYPE	DRAWING NAME	REV
B	I	FRN SERIES CHART 1	A
SCALE	NTS	SHEET	1 OF 1