





APPROVED: _____

DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	8/14/09	
A		ADDED DIM.	4/6/11	
B		ADDED CONTACTS TOLERANCES	11/5/15	AY/RT
C		UPDATE DRAWING	5/16/18	AY/MY

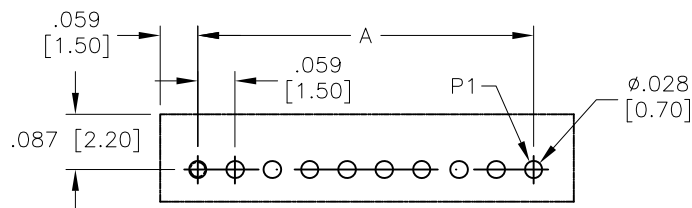

RECOMMENDED PCB LAYOUT

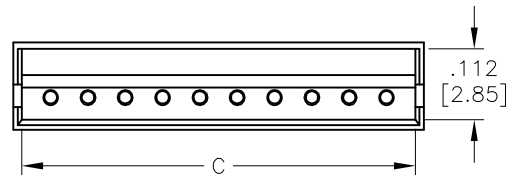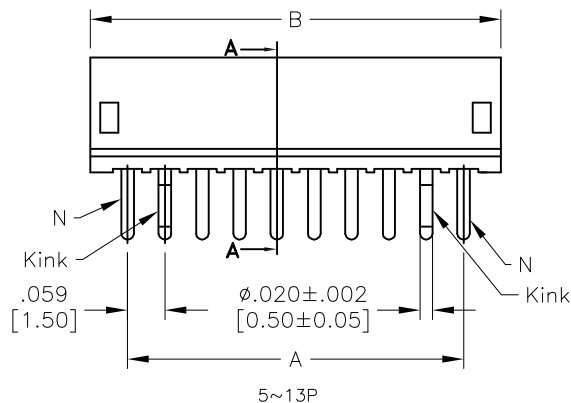

RECOMMENDED ASSEMBLY DIM.

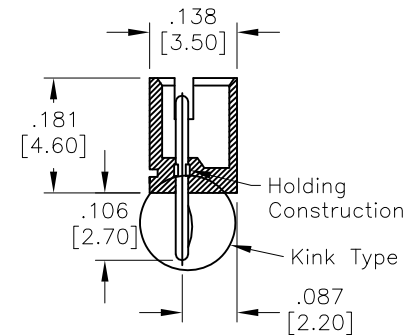

SECTION A-A

Kink						
Circuit	Circuit No.					
	1	2	3	4	5	6~13
2	Kink	Kink				
3	Kink		Kink			
4	Kink			Kink		
5~13	N	Kink			Kink	N

SPECIFICATIONS:

Material:

Insulator: Nylon 66, rated UL 94V-0

Insulator color: Beige

Contacts: Brass

Plating:

Tin over Nickel underplate overall

Electrical:

Voltage rating: 50 V AC/DC

Current rating: 1 A AC/DC

Contact resistance: 20 mohms max

Insulation resistance: 500 Mohms min

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

Operating temperature: -25°C to +85°C

Environmental:

Lead free, RoHS compliant.



Positions: 2 thru 13

A=.059 [1.50] X No. of Spaces

B=.059 [1.50] X No. of Positions + .059 [1.50]

c=.059 [1.50] X No. of Positions + .024 [0.60]

<div>UNLESS OTHERWISE SPECIFIED</div> <div>ALL DIMENSIONS ARE INCHES [MM]</div> <div>TOLERANCES: EXCEPT AS NOTED</div> <div>INCHES HOLES</div> <div><div><div>.X ± .10</div><div>.XX ± .020</div><div>.XXX ± .015</div></div><div><div>Ø.X ± .10</div><div>Ø.XX ± .015</div><div>Ø.XXX ± .010</div></div></div>			<div><div>ADAM</div><div>—</div><div>TECH</div><div>—</div><div>INTERCONNECTS</div></div> <div>909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710</div>		
<div>APPROVALS</div> <div>DRAWN DY 8/14/09</div> <div>CHECKED </div>					