

REVISIONS	
A	DBS DWG CO36515 K S W 18 FEB 76
B	RE-IN CO78497 J A F 21 JUN 94
C	CO- 95612 J J A 1 OCT 99
D	CO94415 TSM 24 NOV 99
E	203709 C S L 10 SEP 01


CATALOG LISTING
RELEASE NO
CO-78497
REPLACES
21P7 SERIES
CHECK
KAG 7 JUL 94
JAF 21 JUN 94
DRAWN
RASTER

MICRO SWITCH
FREEPORT ILLINOIS U S A
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH - TOGGLE
ABOVE PANEL MOUNT

CATALOG LISTING
2TP7 SERIES
CHART 1

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH A DIVISION OF HONEYWELL THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

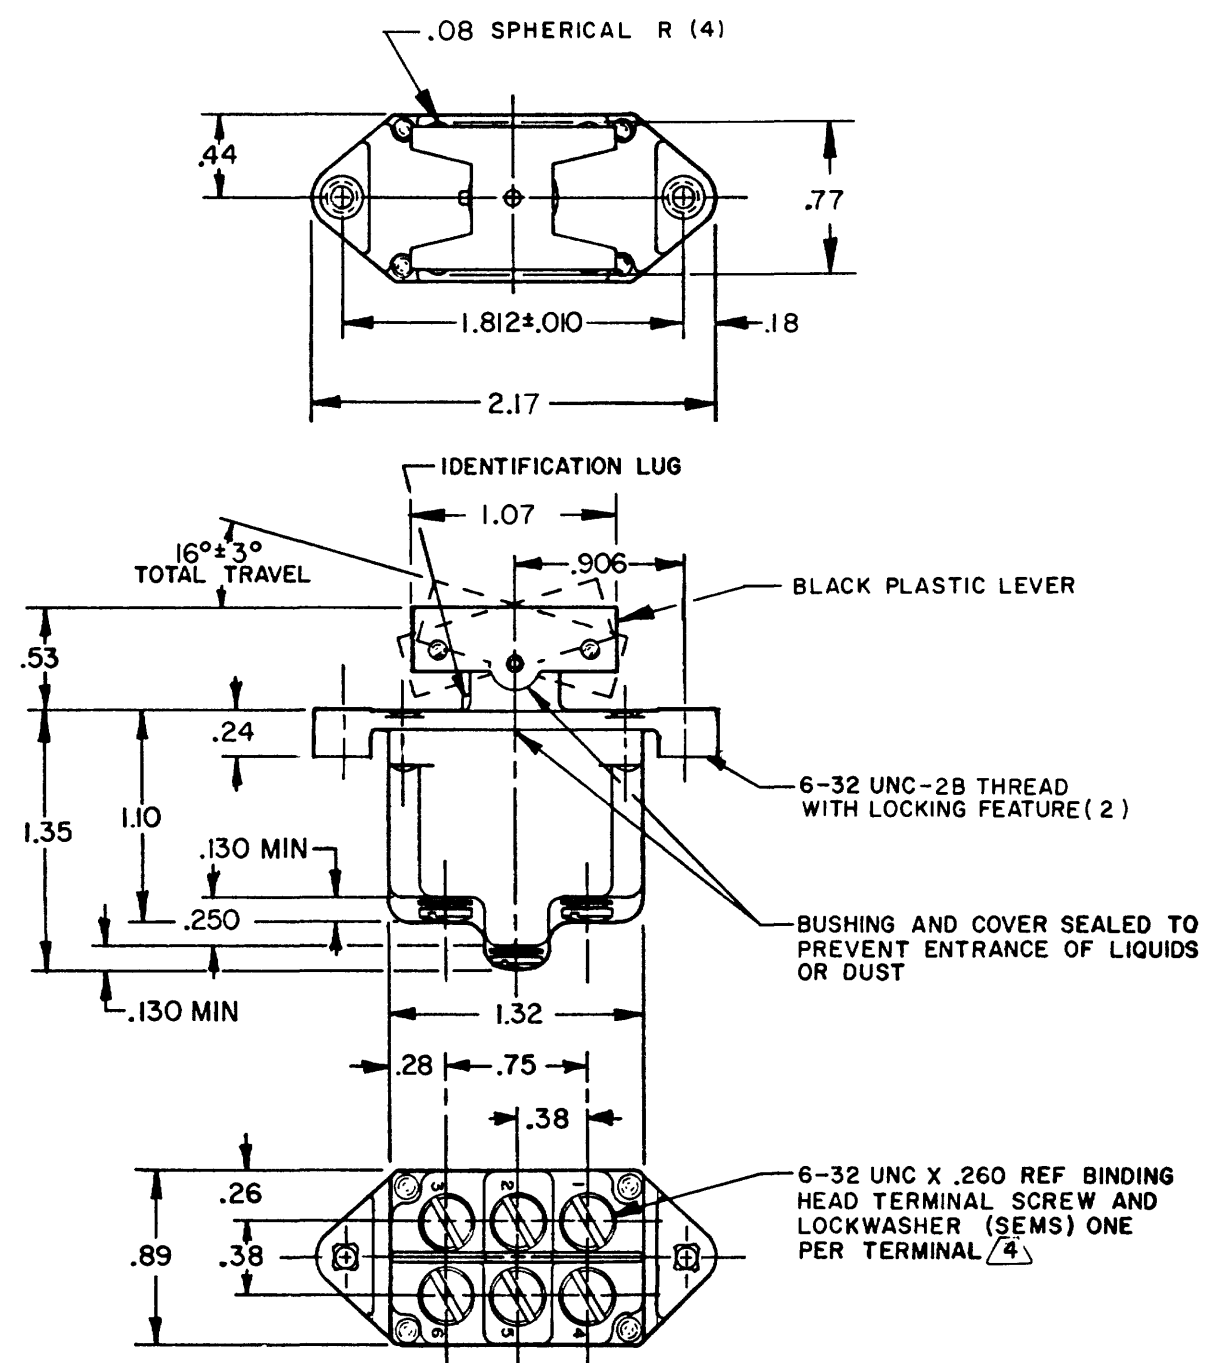

CATALOG LISTING	CIRCUIT MADE WITH BUTTON DEPRESSED ON		
	LUG SIDE (1-2,4-5)	CENTER (1-2,4-5)	OPPOSITE LUG (2-3,5-6)
2TP7-1	ON	OFF	ON
2TP7-2	OFF	NONE	ON
2TP7-3	ON	NONE	ON
2TP7-21	NONE	OFF	ON
2TP7-31	NONE	ON	ON
(E)	MOM OFF	NONE	ON
2TP7-5	MOM ON	OFF	ON
(E)	MOM ON	NONE	OFF
2TP7-7	MOM ON	OFF	MOM ON
2TP7-8	MOM ON	NONE	ON
2TP7-51	NONE	ON	MOM ON
2TP7-61	MOM ON	OFF	NONE

ELECTRICAL DATA	
L 191	
15A 125, 250, 277 VAC 1/2 HP 125 VAC; 1 HP 250, 277 VAC 5A 125 VAC "L"	
L 192	
10A 125, 250, 277 VAC 1/4 HP 125 VAC; 1/2 HP 250, 277 VAC 3A 125 VAC "L"	

BUTTON COLOR CODE (5)	
COLOR IDENTIFICATION	COLOR
W	WHITE
R	RED
Y	YELLOW
BK	BLACK
G	GREEN
BL	BLUE
T	TRANSPARENT

- NOTES
- 1 - SWITCH WILL WITHSTAND TEMPERATURE OF 160°F CONTINUOUSLY AT FULL RATED LOAD
 - 2 - MICRO SWITCH CATALOG LISTING MARKED ON SIDE OF SWITCH
 - (3) APPLIES ONLY TO "ON" AND "MOMENTARY ON" POSITIONS
 - (4) SCREWS FURNISHED UNASSEMBLED
 - (5) SUFFIX MUST BE ADDED FOR DESIRED BUTTON COLOR (EXAMPLE: 2TP7-1-W)

THIRD ANGLE PROJECTION

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE UNLESS NOTED. TOLERANCES ARE ±

DIM.	TOL.	DIM.	TOL.
IN	mm/in	IN	mm/in
NO PLACES	X	1/04	
ONE PLACE	X,X	0.4/018	X,X
TWO PLACES	X,XX	0.15/008	X,XX
THREE PLACES	X,XXX		X,XXX
ANGLES			

SI METRIC
DESIGN UNITS ☐

US CUSTOMARY
DESIGN UNITS ☒

RAW MATERIAL - COMMERCIAL STANDARD
MICRO SWITCH STANDARDS APPLY
DIMENSIONS ARE TO BE MET BEFORE
PROTECTIVE COATINGS ARE APPLIED

WEIGHT .14 LB EST