
FO-55111-B

REV	DOCUMENT	CHANGED BY	CHECK
A	0016321	LKM 24OCT05	VA


HONEYWELL PART NUMBER △4





LAMP △7 (A=AMBER, G=GREEN, R=RED, N=NONE)
LAMP △8 (A=AMBER, G=GREEN, R=RED, N=NONE)
ILLUMINATION STYLE △9
CIRCUITRY △5
NUMBER OF POLES (1=SP-SINGLE POLE, USES TERMINALS 1-2-3) (2=DP-DOUBLE POLE, USES TERMINALS 1-2-3 AND 4-5-6)
TERMINAL STYLE
LED VOLTAGE (2=6V, 3=12V, 4=24V)
ACTUATOR COLOR (B=BLACK, G=GRAY, R=RED, W=WHITE)
BASE/BEZEL COLOR (B=BLACK, G=GRAY, W=WHITE)
LENS STYLE AND COLOR △7 8 = WHITE TRANSLUCENT BAR 9= WHITE TRANSLUCENT SQUARE N=NONE
LENS STYLE AND COLOR △8 8 = WHITE TRANSLUCENT BAR 9= WHITE TRANSLUCENT SQUARE N=NONE


SRL	XX	-	X	X	X	X	X	X	-	X	X	X	X
	91		1	1	A	A	A	2		B	B	8	8
			2	2	U	G	G	3		G	G	9	9
				3		R	R	4		R	W	N	N
				4		N	N			W			
				5									
				6									
				7									
				8									

.250 WIDE QUICK CONNECT TABS

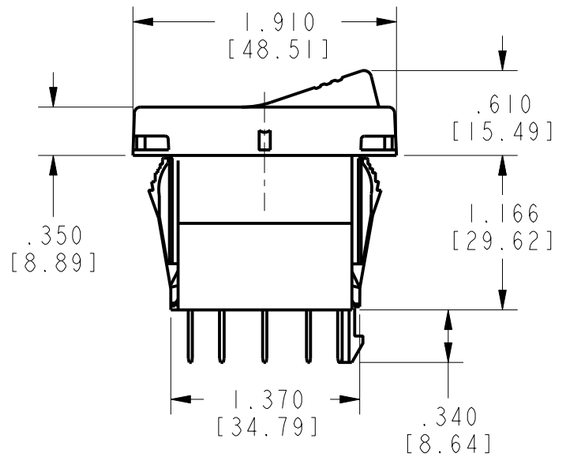

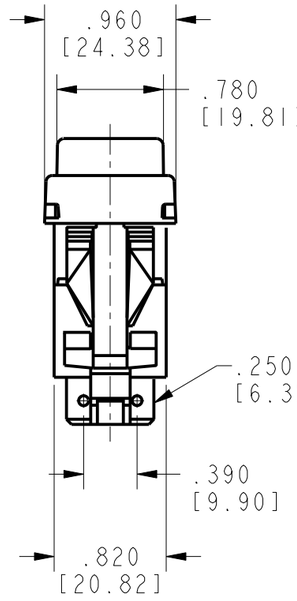






MOUNTING HOLE
PANEL THICKNESS
(SNAP-IN BRACKET)
.030 MIN - .187 MAX
[.76] [4.75]

	CIRCUIT MADE WITH ROCKER IN △5		
	POSITION 3 (1&2, 4&5)	POSITION 2	POSITION 1 (2&3, 5&6)
1	ON	OFF	ON
2	OFF	NONE	ON
3	ON	NONE	ON
4	(OFF)	NONE	ON
5	(ON)	OFF	ON
6	OFF	NONE	(ON)
7	(ON)	OFF	(ON)
8	(ON)	NONE	ON

ELECTRICAL RATINGS AND APPROVALS
10A 250VAC 1/2HP 15A 125VAC 1/2HP UL, CSA

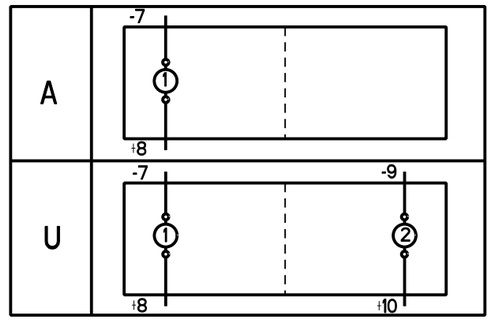

ILLUMINATION CIRCUIT DIAGRAMS △9

1 - OPERATING TEMPERATURE RANGE : -40°F TO +185°F (-40°C TO +85°C)
2 - ELECTRICAL LIFE : 50,000 CYCLES MOMENTARY, 100,000 CYCLES MAINTAINED
3 - MECHANICAL LIFE : 150,000 CYCLES MIN
△4 SEE DIAGRAM FOR CATALOGING SCHEME
△5 PARENTHESIS DENOTE MOMENTARY ACTION
6 - SEALED TO IP68
△7 ABOVE TERMINALS 1 AND 4
△8 ABOVE TERMINALS 3 AND 6
△9 REFER TO CIRCUIT DIAGRAMS

DESIGN UNITS: INCH
TOLERANCES UNLESS NOTED:

NO PLACE	X	±	0.040
ONE PLACE	.X	±	0.030
TWO PLACE	.XX	±	0.015
THREE PLACE	.XXX	±	0.015
FOUR PLACE	.XXXX	±	0.0005
ANGLES	X	±	2

THIRD ANGLE PROJECTION

DRAWN	TSG	14 JUL 05
CHECK	-	-

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.

INTERPRET PER ASME Y14.5M-1994
OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY

Pro/ENGINEER 2D

Honeywell

TITLE
SWITCH , ROCKER

SIZE	TYPE	DRAWING NAME	REV
B	1	SRL SERIES CHART 1	A

SCALE -
SHEET 1 OF 1