
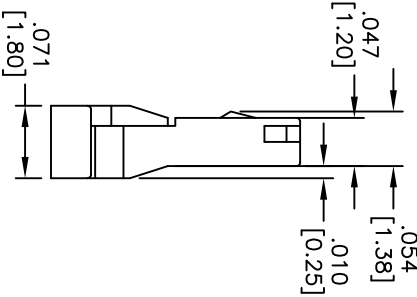
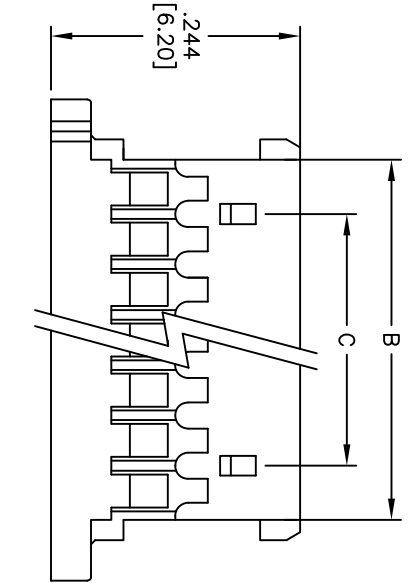


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/30/10	
A		REVISED SHAPE	6/18/12	

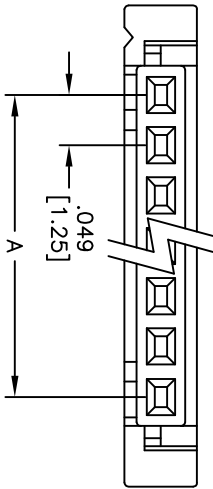

SPECIFICATIONS:

Material: Insulator: PBT, rated UL 94V-0
Insulator color: White
Electrical:
Voltage rating: 125 VAC/DC max
Current rating: 1 Amp max
Insulation resistance: 100 Mohms min
Dielectric withstanding voltage: 250 VAC for 1 minute
Temperature Rating:
Operating temperature: -25°C to +85°C
Environmental: Lead free, RoHS compliant.



Positions: 2 thru 16, 18, 20, 22, 24, 26, 28, 30
A = .049 [1.25] X No. of Spaces
B = .049 [1.25] X No. of Spaces + .057 [1.45]
C = .049 [1.25] X No. of Spaces - .049 [1.25]
DIM. C 2P, 3P (NONE)

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES				ADAM TECH 909 Railway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710			
.X	± .10	ØX	± .10	TITLE .049 [1.25] PITCH CRIMP HOUSING SINGLE ROW, 2 THRU 30 POSITIONS			
.XX	± .020	ØXX	± .015				
.XXX	± .015	ØXXX	± .010				
APPROVALS				DATE			
DRAWN	AY			11/30/10	SIZE	PART NO.	REV.
CHECKED	AH			11/30/10	X	125CH-G-XX	A
APPROVED					REF:	S00123T	SCALE: NTS SHEET 1 OF 1