Panasonic

SK8603170L

Silicon N-channel MOS FET

For Load-switching / For DC-DC Converter

■ Features


- Low Drain-source On-state Resistance : RDS(on)typ = 3.9 mΩ (VGS = 4.5 V)
- Halogen-free / RoHS compliant
  (EU RoHS / UL-94 V-0 / MSL : Level 1 compliant)

■ Marking Symbol : 17

■ Packaging

Embossed type (Thermo-compression sealing) : 3 000 pcs / reel (standard)

Unit : mm

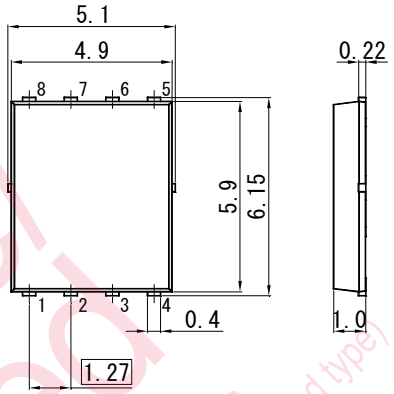

1. Source
2. Source
3. Source
4. Gate
5. Drain
6. Drain
7. Drain
8. Drain


Panasonic	HSO8-F4-B
JEITA	SC-111BC
Code	—

■ Absolute Maximum Ratings Ta = 25 °C

Parameter		Symbol	Rating	Unit
Drain to Source Voltage		VDS	30	V
Gate to Source Voltage		VGS	±20	
Drain Current	Ta = 25 °C, t = 10 s *1	ID	28	A
	Ta = 25 °C, DC *1		20	
	Tc = 25 °C		59	
	Pulsed, Tch < 150 °C *2		84	
Total Power Dissipation	Ta = 25 °C, DC *1	PD	2.8	W
	Tc = 25 °C		24	
Thermal Resistance	Channel to Ambient	Rth(ch-a)	44	°C / W
	Channel to Case	Rth(ch-c)	5.1	
Channel Temperature		Tch	150	°C
Operating ambient temperature		Topr	-40 to +85	
Storage Temperature Range		Tstg	-55 to +150	
Avalanche Current (Single pulse) *3		IAR	14	A
Avalanche Energy (Single pulse) *3		EAR	24	mJ

Note *1 Device mounted on a glass-epoxy board in Figure 1
*2 Pulse test: Ensure that the channel temperature does not exceed 150 °C
*3 VDD = 24 V, VGS = 10 to 0 V, L = 0.1 mH, Tch = 25 °C (initial)

Internal Connection



Pin Name

1. Source
2. Source
3. Source
4. Gate
5. Drain
6. Drain
7. Drain
8. Drain




Figure 1 FR4 Glass-Epoxy Board
25.4 mm × 25.4 mm × 0.8 mm

Maintenance/ Discontinued
(planed maintenance/discontinued following four product lifecycle stage: planed maintenance type, planed discontinued type, maintenance type, discontinued type)

Established : 2012-12-20
Revised : 2013-05-31

■ Electrical Characteristics Ta = 25 °C ± 3 °C

Static Characteristics

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Drain-source Breakdown Voltage	VDSS	ID = 1 mA, VGS = 0 V	30			V
Zero Gate Voltage Drain Current	IDSS	VDS = 30 V, VGS = 0 V			10	μA
Gate-source Leakage Current	IGSS	VGS = ±16 V, VDS = 0 V			±10	μA
Gate-source Threshold Voltage	Vth	ID = 2.56 mA, VDS = 10 V	1.3		3	V
Drain-source On-state Resistance	RDS(on)1	ID = 14 A, VGS = 10 V		2.9	4.1	mΩ
	RDS(on)2	ID = 14 A, VGS = 4.5 V		3.9	5.8	

Dynamic Characteristics

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Input Capacitance	Ciss	VDS = 10 V, VGS = 0 V f = 1 MHz		2 100	2 940	pF
Output Capacitance	Coss			250	350	
Reverse Transfer Capacitance	Crss			180	290	
Turn-on Delay Time *1	td(on)	VDD = 15 V, VGS = 0 to 10 V ID = 14 A		11		ns
Rise Time *1	tr			10		
Turn-off Delay Time *1	td(off)	VDD = 15 V, VGS = 10 to 0 V ID = 14 A		48		ns
Fall Time *1	tf			7		
Total Gate Charge	Qg	VDD = 15 V, VGS = 0 to 4.5 V ID = 14 A		17		nC
Gate to Source Charge	Qgs			6		
Gate to Drain Charge	Qgd			7		
Gate resistance	rg	f = 5 MHz		1.2	3	Ω

Body Diode Characteristic


Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Diode Forward Voltage	VSD	IS = 14 A, VGS = 0 V		0.8	1.2	V

Note : 1. Measuring methods are based on JAPANESE INDUSTRIAL STANDARD JIS C 7030 Measuring methods for transistors.
2. *1 Measurement circuit for Turn-on Delay Time / Rise Time / Turn-off Delay Time / Fall Time

Maintenance/ Discontinued
Maintenance/Discontinued including four Product lifecycle stages
(planed maintenance type, maintenance type, planed discontinued type, discontinued type)

Established : 2012-12-20
Revised : 2013-05-31

*1 Measurement circuit for Turn-on Delay Time / Rise Time / Turn-off Delay Time / Fall Time

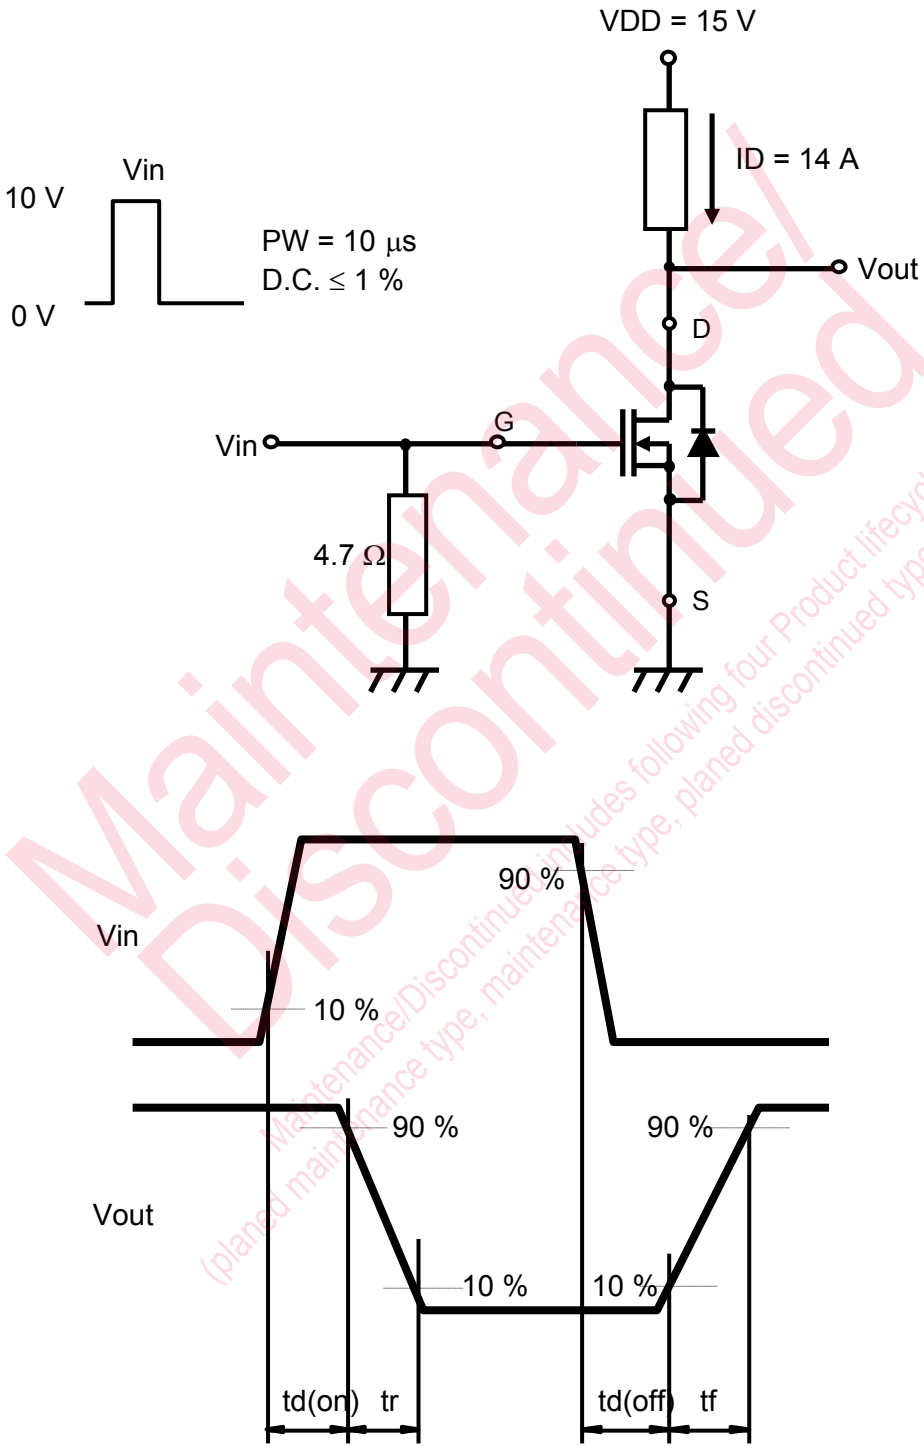

Maintenance/ Discontinued
(planed maintenance type, maintenance/Discontinue includes following four Product lifecycle stage. planed discontinued typed, discontinued type)

Established : 2012-12-20
Revised : 2013-05-31


MOS FET

Panasonic


SK8603170L

Technical Data (reference)


ID - VDS

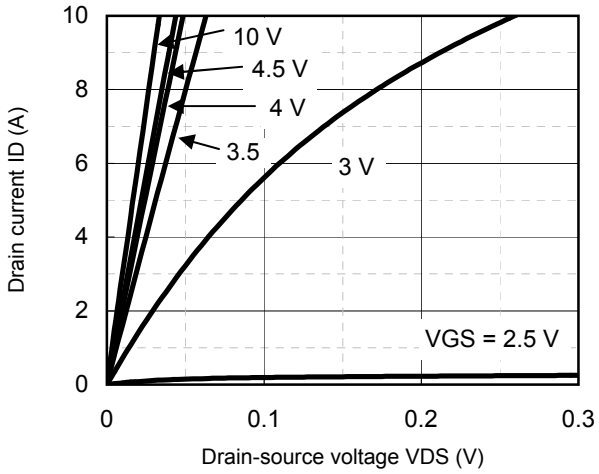


ID - VGS

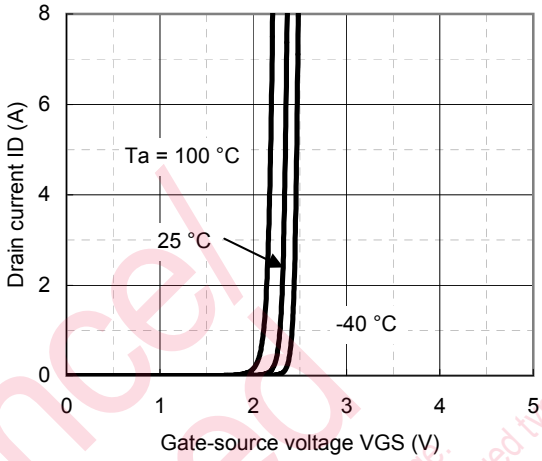


VDS - VGS

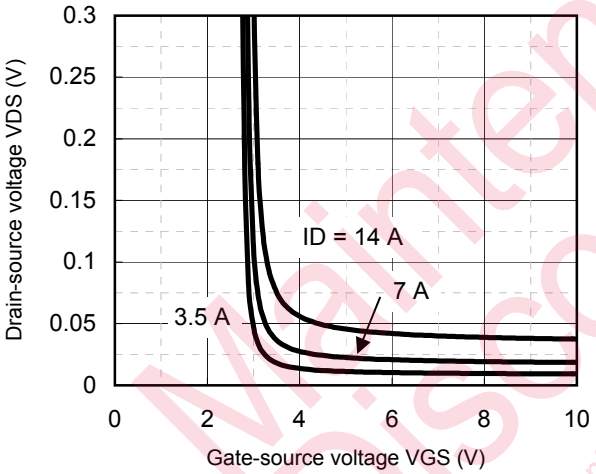


RDS(on) - ID

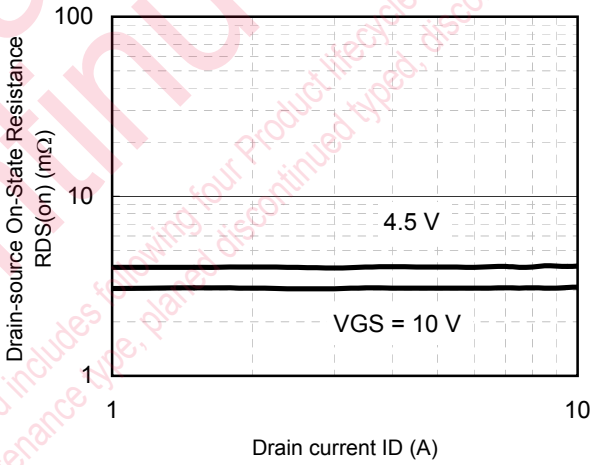

Capacitance - VDS

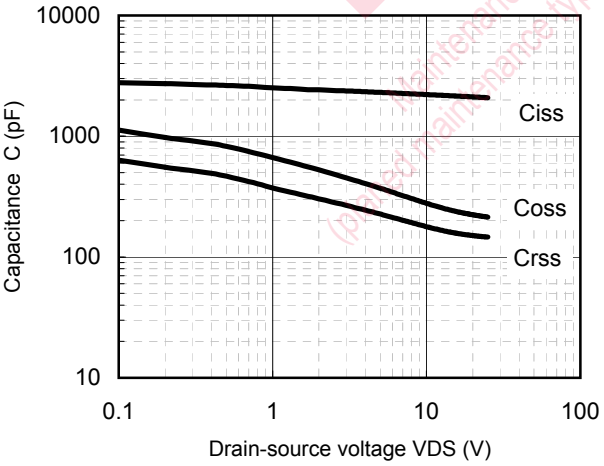

Dynamic Input/Output Characteristics

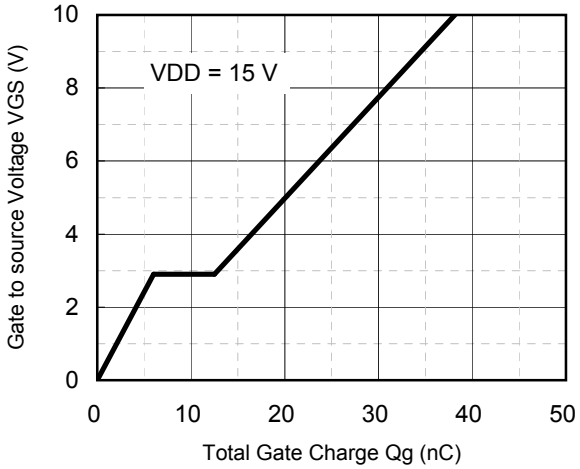


Maintenance/ Discontinued
(Product lifecycle stage: Maintenance/Discontinued includes following four types: maintenance type, planned discontinued type, discontinued type)


Established : 2012-12-20
Revised : 2013-05-31

Technical Data (reference)


Vth - Ta

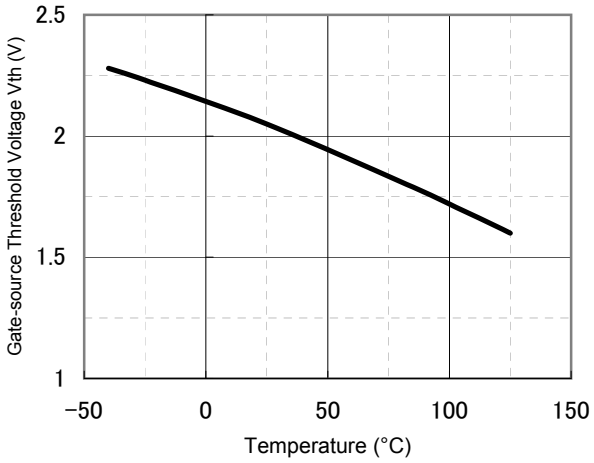


RDS(on) - Ta

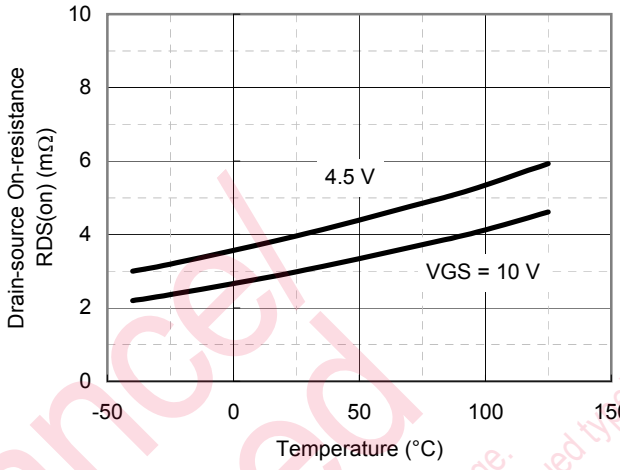


PD - Ta

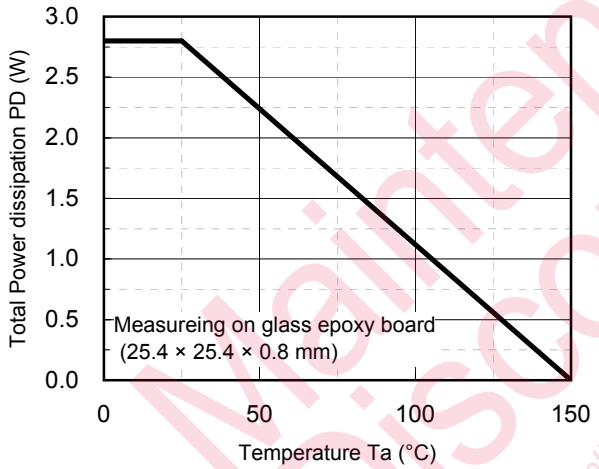


PD - Tc

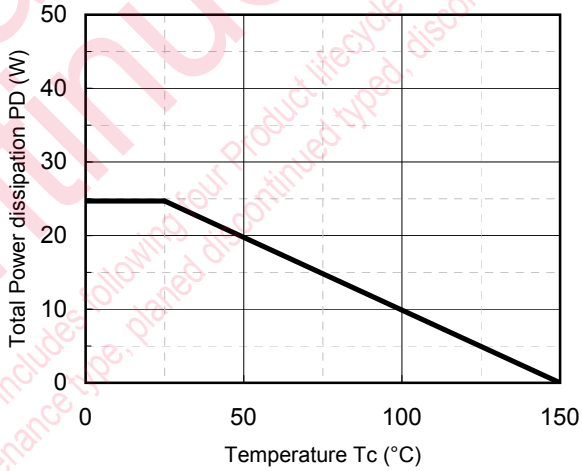

Rth - tsw

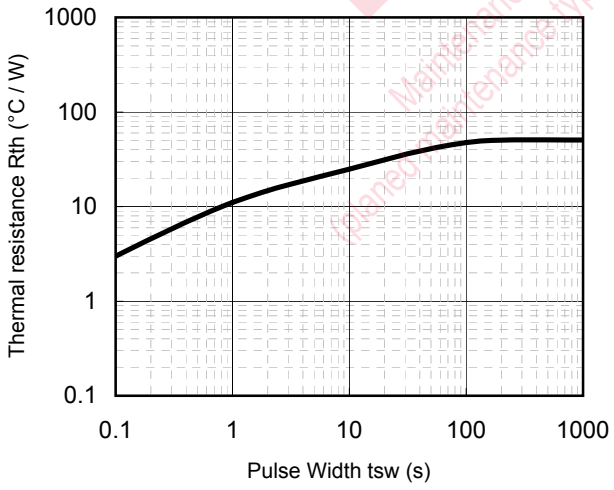


Safe Operating Area

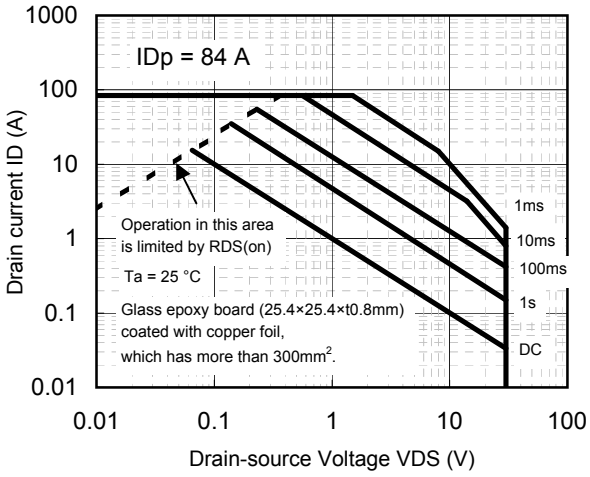


Maintenance/ Discontinued
(planed discontinued includes following four Product lifecycle stage.
maintenance type, planed discontinued typed, discontinued type)

Established : 2012-12-20
Revised : 2013-05-31

HSO8-F4-B

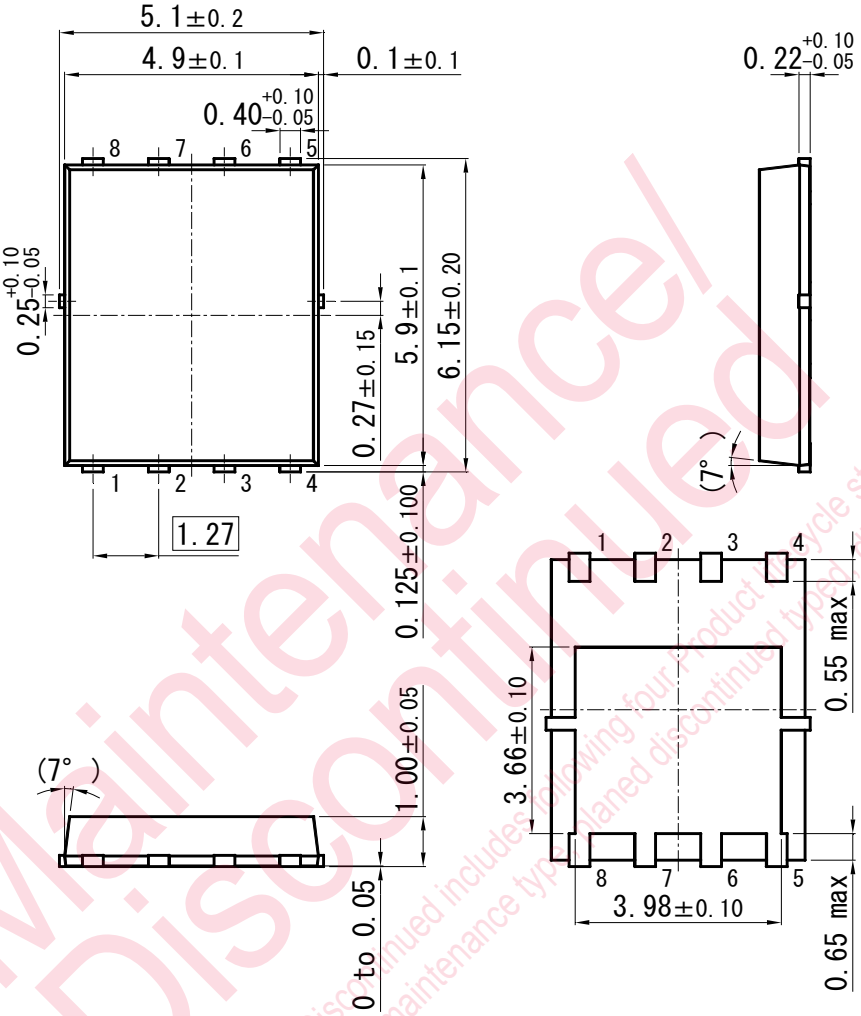

■ Land Pattern (Reference) (Unit : mm)

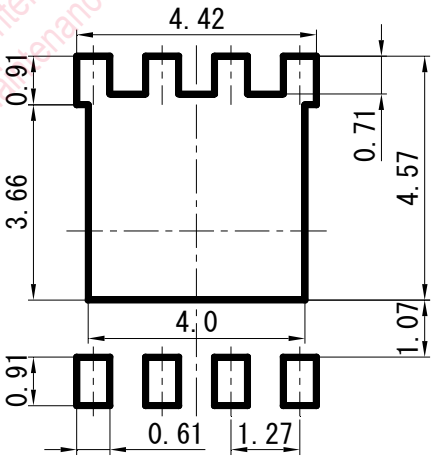

Maintenance/Discontinued
(planed maintenance type, maintenance type, planed discontinued includes following four product life cycle stage. discontinued type)

Established : 2012-12-20
Revised : 2013-05-31

Request for your special attention and precautions in using the technical information and semiconductors described in this book

(1) If any of the products or technical information described in this book is to be exported or provided to non-residents, the laws and regulations of the exporting country, especially, those with regard to security export control, must be observed.

(2) The technical information described in this book is intended only to show the main characteristics and application circuit examples of the products. No license is granted in and to any intellectual property right or other right owned by Panasonic Corporation or any other company. Therefore, no responsibility is assumed by our company as to the infringement upon any such right owned by any other company which may arise as a result of the use of technical information de-scribed in this book.

(3) The products described in this book are intended to be used for general applications (such as office equipment, communications equipment, measuring instruments and household appliances), or for specific applications as expressly stated in this book.
Please consult with our sales staff in advance for information on the following applications, moreover please exchange documents separately on terms of use etc.: Special applications (such as for in-vehicle equipment, airplanes, aerospace, automotive equipment, traffic signaling equipment, combustion equipment, medical equipment and safety devices) in which exceptional quality and reliability are required, or if the failure or malfunction of the products may directly jeopardize life or harm the human body.
Unless exchanging documents on terms of use etc. in advance, it is to be understood that our company shall not be held responsible for any damage incurred as a result of or in connection with your using the products described in this book for any special application.

(4) The products and product specifications described in this book are subject to change without notice for modification and/or improvement. At the final stage of your design, purchasing, or use of the products, therefore, ask for the most up-to-date Product Standards in advance to make sure that the latest specifications satisfy your requirements.

(5) When designing your equipment, comply with the range of absolute maximum rating and the guaranteed operating conditions (operating power supply voltage and operating environment etc.). Especially, please be careful not to exceed the range of absolute maximum rating on the transient state, such as power-on, power-off and mode-switching. Otherwise, we will not be liable for any defect which may arise later in your equipment.
Even when the products are used within the guaranteed values, take into the consideration of incidence of break down and failure mode, possible to occur to semiconductor products. Measures on the systems such as redundant design, arresting the spread of fire or preventing glitch are recommended in order to prevent physical injury, fire, social damages, for example, by using the products.

(6) Comply with the instructions for use in order to prevent breakdown and characteristics change due to external factors (ESD, EOS, thermal stress and mechanical stress) at the time of handling, mounting or at customer's process. We do not guarantee quality for disassembled products or the product re-mounted after removing from the mounting board.
When using products for which damp-proof packing is required, satisfy the conditions, such as shelf life and the elapsed time since first opening the packages.

(7) When reselling products described in this book to other companies without our permission and receiving any claim of request from the resale destination, please understand that customers will bear the burden.

(8) This book may be not reprinted or reproduced whether wholly or partially, without the prior written permission of our company.

Maintenance/
Discontinued
(planed maintenance type)
Maintenance/discontinued includes following lifecycle stage:
(planed maintenance type, planed discontinued type)