

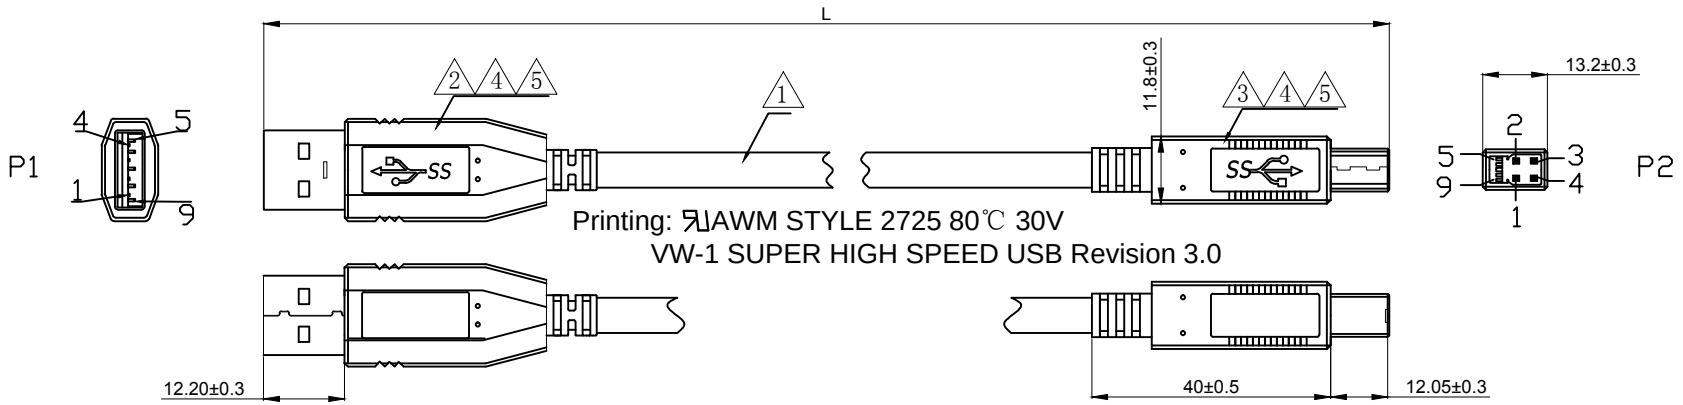


① Pin Assignment

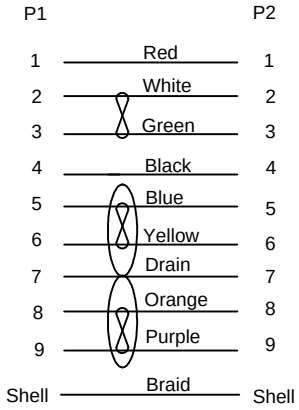



NOTES:

1. Cable Must Be Open, Short, Miswire 100% Test
2. Voltage: 300V DC
3. Contact Resistance: 5ohms max.
4. Insulation Resistance: 10M ohms min.
5. 1Pcs/PE Bag

②

WSW P/N	Length(mm)	Qty/Per Carton
A-USB30AM-30BM-050	500±20	200
A-USB30AM-30BM-100	1000±30	150
A-USB30AM-30BM-200	2000±50	100
A-USB30AM-30BM-300	3000±50	70
A-USB30AM-30BM-500	5000±50	50

②

NO.	TITLE	DESCRIPTION
5	Inner Mold	LDPE WHITE
4	Over Mold	PVC 45P Black
3	CONN	USB3.0 B/M, Blue PBT, PIN G/F, Shell Ni-Plated
2	CONN	USB3.0 A/M, Blue PBT, PIN G/F, Shell Ni-Plated
1	CABLE	UL2725(Rev 3.0), OD:5.5mm BLACK, (1P#30+D+AL+Mylar)*2C+1P#30+2C#24+AL+B
NO.	TITLE	DESCRIPTION

RoHS compliant

Unit: mm

Scale	FREE					Date	Name
TOLERANCE					Drawn	07.01.2019	Xavier
					Approved	10.12.2019	Winnie
		②	Packing quantities & PVC hardness	10.12.2019	Winnie		
DIM	TOL	①	Add wire color	07.15.2019	Xavier		
		⓪	Drawn	07.01.2019	Xavier		
Angle	TOL	Id.	Modification	Date	Name		

ASSMANN WSW components

Customer-No.

ASSMANN WSW-No.
A-USB30AM-30BM-xxx

Drawing-No.
ASS 8453 CA

rev02

Replace

Sheet
1/1

CAB0898