

6

5


4

3


2

1

COOPER CATALOG NUMBER	MATERIAL NUMBER	CONDUIT SIZE	N.P.T. FITTING SIZE	LENGTH "M"	DIAMETER "A" REF.	LENGTH "B" REF.	LENGTH "C" REF.	LENGTH "D" REF.	PRODUCT SELECTION NUMBER	UL LISTED	CSA APRVD
36442	1300960057	3/8"	1/2"	3.875±0.500 / 98.43±12.70	1.0 / 25	1.13 / 28.7	0.63 / 16.0	0.88 / 22.4	STB038P-45	Y E S	Y E S
36390	1300960044	1/2"	1/2"	4.625±0.500 / 117.48±12.70	1.2 / 30	1.25 / 31.8	0.63 / 16.0	0.88 / 22.4	STB050P-45		
36391	1300960045	3/4"	3/4"	5.750±0.500 / 146.05±12.70	1.4 / 36	1.50 / 38.1	0.63 / 16.0	1.13 / 28.7	STB075P-45		
36392	1300960046	1"	1"	7.000±0.500 / 177.80±12.70	1.7 / 43	1.81 / 45.9	0.75 / 19.1	1.38 / 35.1	STB100P-45		
36393	1300960047	1-1/4"	1-1/4"	8.125±1.000 / 206.38±25.40	2.0 / 51	2.31 / 58.7	0.63 / 16.0	1.63 / 41.4	STB125P-45		
36394	1300960048	1-1/2"	1-1/2"	9.250±1.000 / 234.95±25.40	2.5 / 64	2.63 / 66.8	0.63 / 16.0	1.81 / 45.9	STB150P-45		
36395	1300960049	2"	2"	11.500±1.000 / 292.10±25.40	3.0 / 76	3.19 / 81.0	0.69 / 17.5	2.00 / 50.8	STB200P-45		
37036	-----	2-1/2"	2-1/2"	11.250±1.000 / 285.75±25.40	3.6 / 91	3.94 / 100.1	1.06 / 26.9	3.56 / 90.4	STB250P-45		
37037	1300960068	3"	3"	14.750±1.500 / 374.65±38.10	4.3 / 109	4.38 / 111.3	1.19 / 30.2	4.31 / 109.5	STB300P-45		
37038	-----	4"	4"	16.250±1.500 / 412.75±38.10	5.4 / 137	5.50 / 139.7	1.25 / 31.8	4.63 / 117.6	STB400P-45		

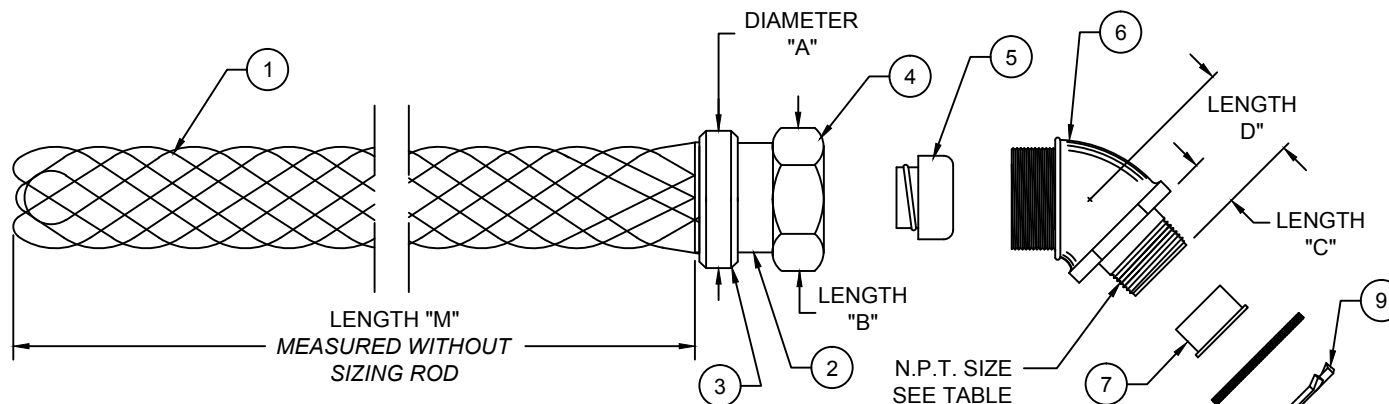

ASSEMBLED GRIP

INSTRUCTIONS INCLUDED
WITH GRIP

ITEM	DESCRIPTION	MATERIAL
1	WIRE MESH	STAINLESS STEEL
2	INNER RING	ZINC PLATED STEEL
3	OUTER RING	ALUMINUM
4	COMPRESSION NUT	ZINC PLATED STEEL OR MALLEABLE IRON
5	FERRULE	ZINC PLATED STEEL OR ALUMINUM
6	THREADED BODY	ZINC PLATED STEEL OR MALLEABLE IRON
7	THROAT INSULATION	PLASTIC
8	GASKET	NEOPRENE
9	LOCK NUT	ZINC PLATED STEEL

RELEASE SALES DWG EC NO: IGC2015-0536 DRWN: HRUIZ01 2014/09/23 CHK'D: HKNEELAN 2014/09/23 APPR: JFMURPHY 2015/04/27		DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽C=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE INCH/MM		SCALE NTS	DESIGN UNITS INCH	THIRD ANGLE PROJECTION		
					mm	INCH	DRAWN BY DATE		TITLE STRAIN RELIEF LIQUID TIGHT CONDUIT 45 DEGREE-MALE			
				4 PLACES	±---	±---	HRUIZ01 2014/09/23					
				3 PLACES	±---	±.005	CHECKED BY DATE					
A	REV			2 PLACES	±.13	±.010	HKNEELAN 2014/09/23		MOLEX INCORPORATED			
				1 PLACE	±.25	±.020	APPROVED BY DATE					
				ANGULAR ±1/2°		JFMURPHY 2015/04/27		molex				
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO. SEE TABLE		DOCUMENT NO. SD-130096-102		SHEET NO. 1 OF 1		
				SIZE A	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							

6

5

4

3

2

1