

E

D

C

B

A

E



D

C

B

A

MATERIAL NUMBER	ENGINEERING PART NUMBER	FINISHED LENGTH
1200980198	MM3S60PP4M010	3.28' +2.19" -0 [1.0M +55.6 -0]
1200980118	MM3S60PP4M050	16.40' +6.50" -0 [5.0M +165.1 -0]

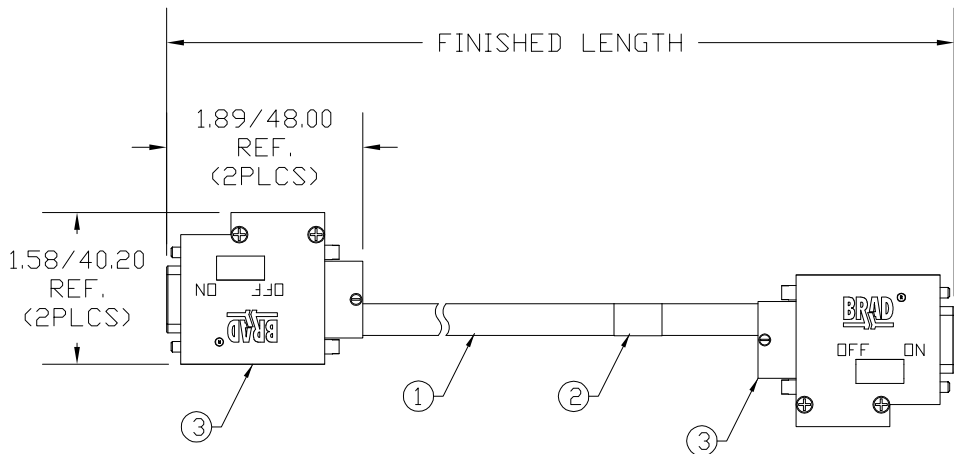

D-SUB FACE VIEW

9	NOT CONNECTED	9
8	GREEN (LINE A)	8
7	NOT CONNECTED	7
6	NOT CONNECTED	6
5	NOT CONNECTED	5
4	NOT CONNECTED	4
3	RED (LINE B)	3
2	NOT CONNECTED	2
1	NOT CONNECTED	1

WIRING DIAGRAM

VOLTAGE RATING	250 VAC/VDC
AMPERAGE RATING	4 AMPS
PROTECTION FOR D-SUB	IP40
OPERATING TEMPERATURE	-20°C TO 80°C

ITEM	COMPONENT	MATERIAL	FINISH
1	CABLE- 22 AWG, COPPER STRANDING TWISTED PAIR SHIELD WITH BRAID	PUR	PURPLE
2	LABEL	MLYAR	BLACK/YELLOW
3	D-SUB	ABS	BLACK

RLSD DRAWING	EC NO: WNA2010-0143	8/27/09
	DRWN: TWOLDEGE	
	CHKD: BWOODMAN	
	APPR: JFMURPHY	2009/08/28
A	REV	

QUALITY SYMBOLS
$\nabla = 0$
$\nabla C = 0$

GENERAL TOLERANCES (UNLESS SPECIFIED)		
	mm	INCH
4 PLACES	±----	±---
3 PLACES	±----	±---
2 PLACES	±----	±.01
1 PLACE	±0.3	±---
ANGULAR ±---°		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		

DIMENSION STYLE IN/MM	
DRAWN BY	DATE
TWOLDEGE	2009/08/26
CHECKED BY	DATE
BWOODMAN	2009/08/26
APPROVED BY	DATE
JFMURPHY	2009/08/27
MATERIAL NO.	
SEE CHART	
SIZE	A

SCALE ---	DESIGN UNITS ----	 THIRD ANGLE PROJECTION
TITLE MICRO-CHANGE PROFIBUS 9P HORIZ-HORIZ DSUB-DSUB PUR CABLE		
MOLEX INCORPORATED		
DOCUMENT NO. SD-120098-025		SHEET NO. 1 OF 1
CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		

6

5

4

3

2

1