
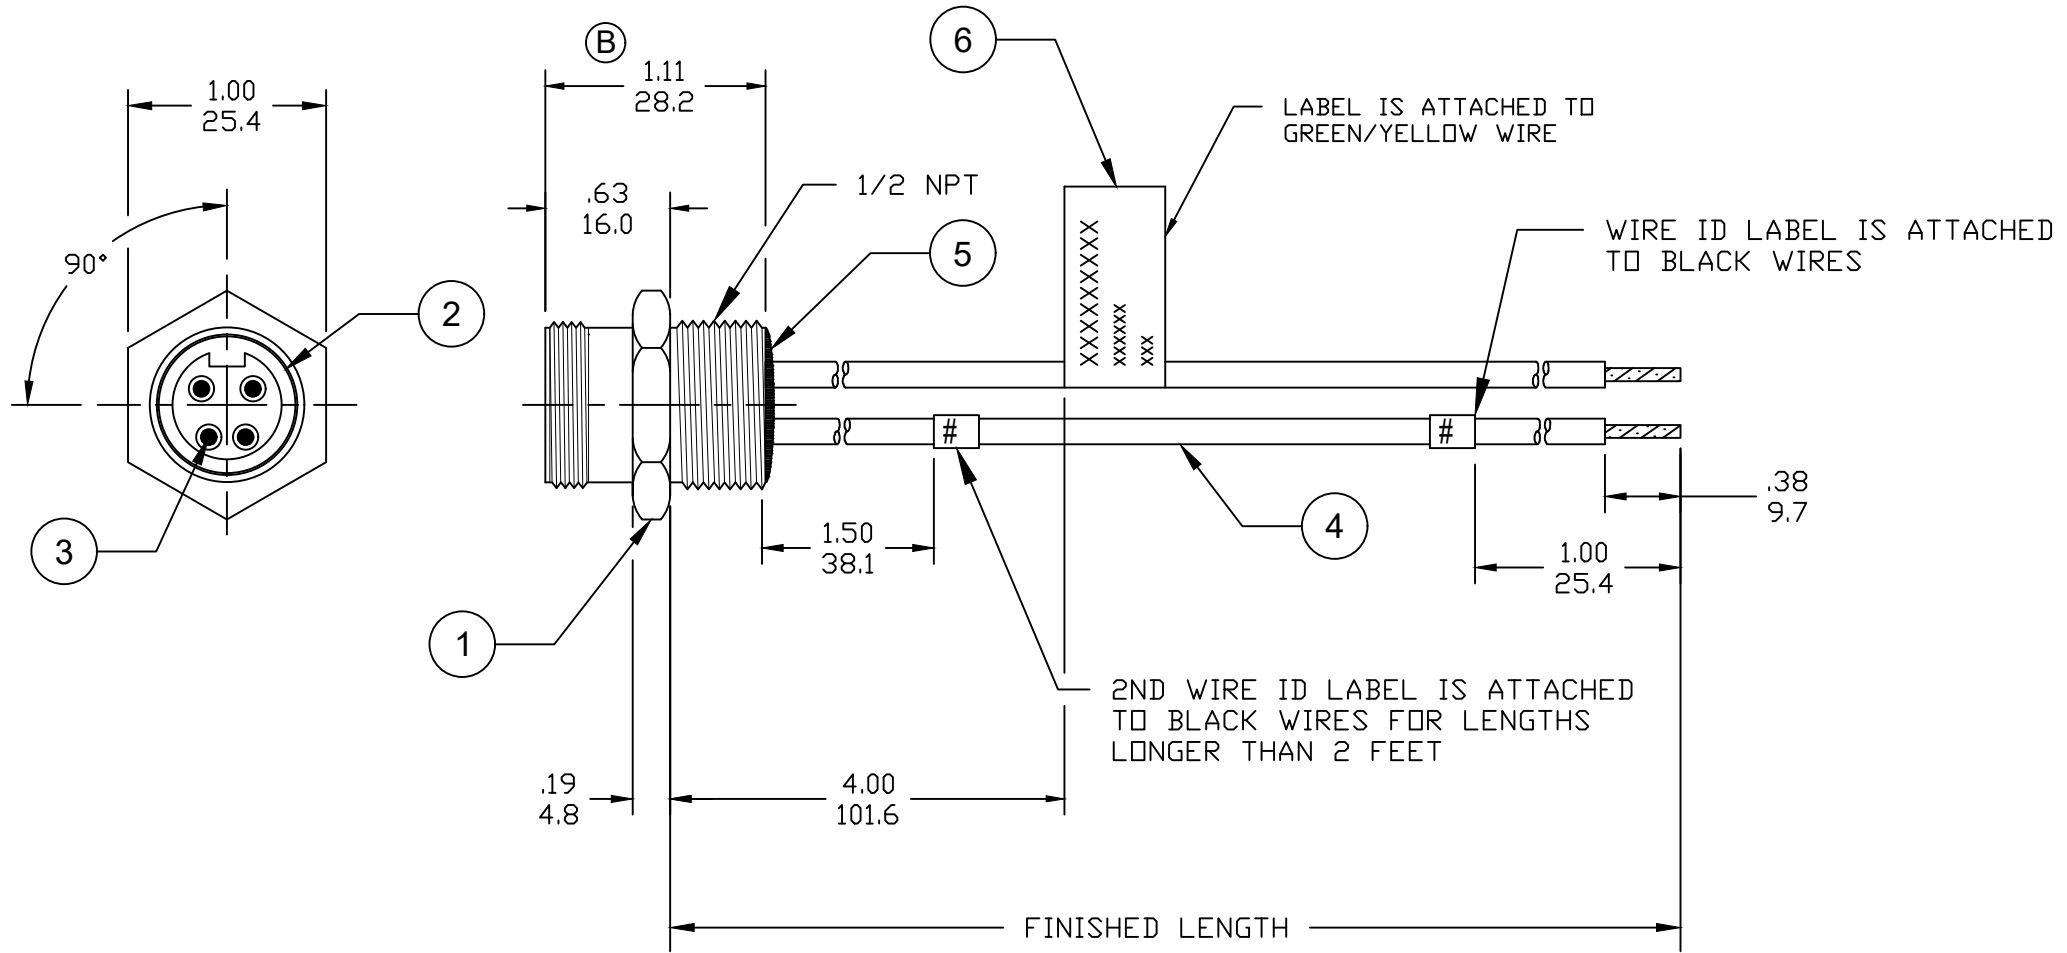


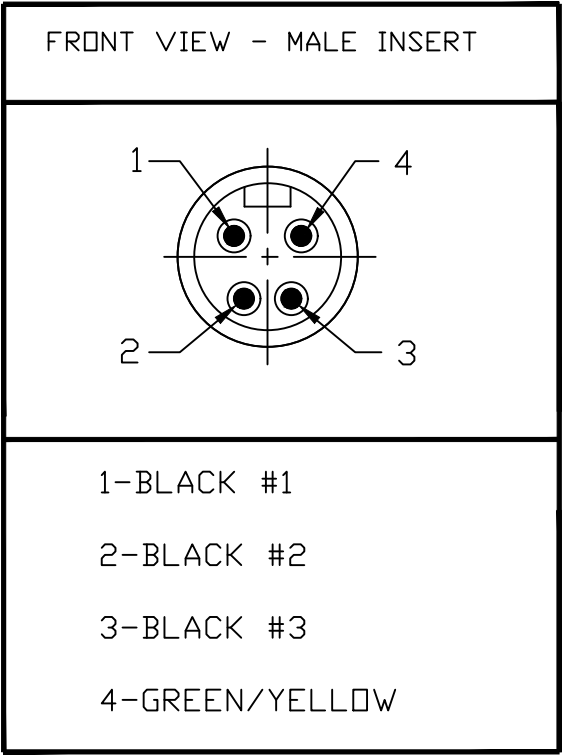


- NOTES:
1. MATERIAL: AS NOTED
 2. FINISH: AS NOTED
 3. ELECTRICAL:
 - ② VOLTAGE: 483V PER IEC60664
600V PER UL2237
 - CURRENT: 15A
 4. TEMP RATING: -20°TO +90°C
 5. PROTECTION: IP67 (WHEN MATED)
 6. COUPLING THREAD: 7/8-16UN
 - ② 7. UL LISTED FILE: E258992
 8. ALL DIMS ARE FOR REFERENCE UNLESS NOTED OR TOLERANCED OTHERWISE

PART NUMBER LEGEND

1R4006A82M005G

FINISHED LENGTH:
M005= 0.5 METER
M010= 1 METER
M100= 10 METER

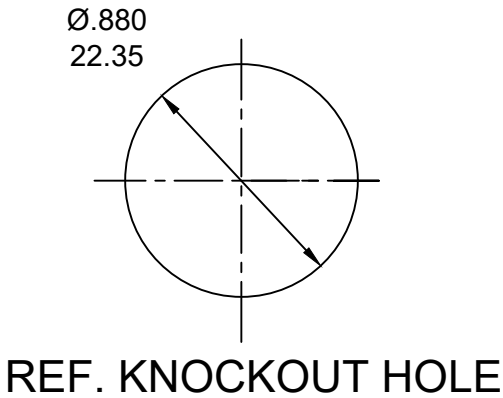

6	FLAG LABEL	VINYL	BLACK/YELLOW
5	POTTING MATERIAL	EPOXY	
4	WIRE, 14 AWG (UL1015) ②	PVC INSULATION	SEE FACE VIEW
3	CONTACT PIN	COPPER ALLOY	GOLD PLATED
2	MALE INSERT	TPE ②	BLACK
1	RECEPTACLE SHELL	ZINC DIE-CAST	BLACK
ITEM	DESCRIPTION	MATERIAL	FINISH

SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																		
 = 0	DIMENSION UNITS		SCALE		CURRENT REV DESC: WIRE WAS THHN, INSERT WAS PVC, IEC VOLTAGE WAS 320, 1.11 WAS 1.10, ADD 90 DEG F FOR KEY, ADD NOTE 7					molex MINI-CHANGE RECEPTACLE MALE, 4P, 14 AWG 1/2 NPT									
	INCH/MM		1:1																
 = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)																		
 = 0																			
 = 0	mm		INCH							EC NO: 626130									
 = 0	4 PLACES ±----		±----												DRWN: RSTONE 2019/10/22				
 = 0	3 PLACES ±----		±----		CHK'D: ALEON01 2019/10/24														
 = 0	2 PLACES ±----		±----																
 = 0	1 PLACE ±----		±----		INITIAL REVISION:														
 = 0	0 PLACES ±----		±----							DRWN: RSTONE 2017/01/09									
 = 0	ANGULAR TOL ± ---- °				APPR: BWOODMAN 2017/01/26														
= 0	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS									THIRD ANGLE PROJECTION		DRAWING		SERIES		DOCUMENT NUMBER		DOC TYPE	
							B-SIZE		130066		SD-130066-073		PSD		001		B		
											MATERIAL NUMBER		CUSTOMER				SHEET NUMBER		
													GENERAL MARKET				1 OF 1		