

# Wound Beads (2944666634)



Part Number: 2944666634

44 WOUND BEAD

Explanation of Part Numbers:

- Digits 1 & 2 = Product Class
- Digits 3 & 4 = Material Grade
- Last digit 1 = Bulk Packed 4 = Taped and Reeled

**Six and eleven hole beads, in two NiZn materials, are available both as beads (product class 26) and wound with tinned copper wire in several winding configurations (product class 29).**

Wire used for winding is oxygen free high conductivity copper with 100% matte tin plating over a nickel undercoating.

Recommended storage temperature and operating temperature is -55 °C to 125 °C

Recommended Soldering Profile

Packaging Options:

- Parts with a 1 as the last digit of the part number are supplied bulk packed. Wound beads with part numbers 29- 666631 and 29- 666651 can be supplied radially taped and reeled per IEC 60286-1 and EIA 468- B standards. For these taped and reeled wound beads the last digit of the part number is a 4. Taped and reeled wound beads are supplied 500 pieces on a 13 reel.

**For any wound bead requirement not listed in here, please contact our customer service group for availability and pricing.**


[Catalog Drawing](#)  
[3D Model](#)

Weight: 1.4 (g)

| Dim | mm   | mm tol | nominal inch | inch misc. |
|-----|------|--------|--------------|------------|
| A   | 6    | ±0.25  | 0.236        | —          |
| B   | 0.75 | +0.15  | 0.032        | —          |
| C   | 10   | ±0.25  | 0.394        | —          |
| D   | 3.51 | Ref    | 0.138        | Ref        |

| Reel Information |             |                  |                   |                   |
|------------------|-------------|------------------|-------------------|-------------------|
| Tape Width<br>mm | Pitch<br>mm | Parts 7"<br>Reel | Parts 13"<br>Reel | Parts 14"<br>Reel |
| —                | 12.7        | —                | 500               | —                 |

| Winding Information |                |                       |                 |
|---------------------|----------------|-----------------------|-----------------|
| Turns Tests         | Wire Size      | 1st Wire Length       | 2nd Wire Length |
| 3                   | 0.53<br>24 AWG | 38.0 ±3.0<br>(1.496") | —               |

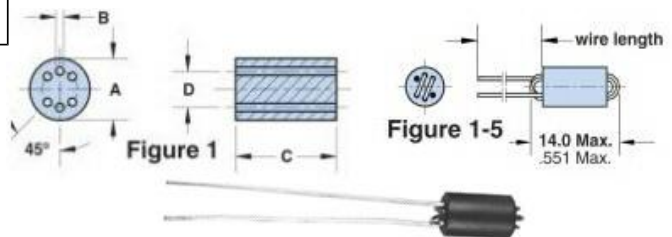

**Chart Legend**

- + Test frequency
- A ½ turn is defined as a single pass through a hole.



| Typical Impedance ( $\Omega$ ) |      |
|--------------------------------|------|
| 1 MHz                          | 131  |
| 10 MHz <sup>+</sup>            | 650  |
| 50 MHz <sup>+</sup>            | 1180 |
| 100 MHz <sup>+</sup>           | 1200 |
| 200 MHz                        | 845  |

Beads are controlled for impedance limits only. Minimum impedance values are specified for the + marked frequencies.

The minimum impedance is listed on our catalog drawing.

[Catalog Drawing](#)

The 44 material beads and wound beads are tested on the E4990A Impedance Meter. The 61 material parts on the E4991A / HP4291B Impedance Analyzer.

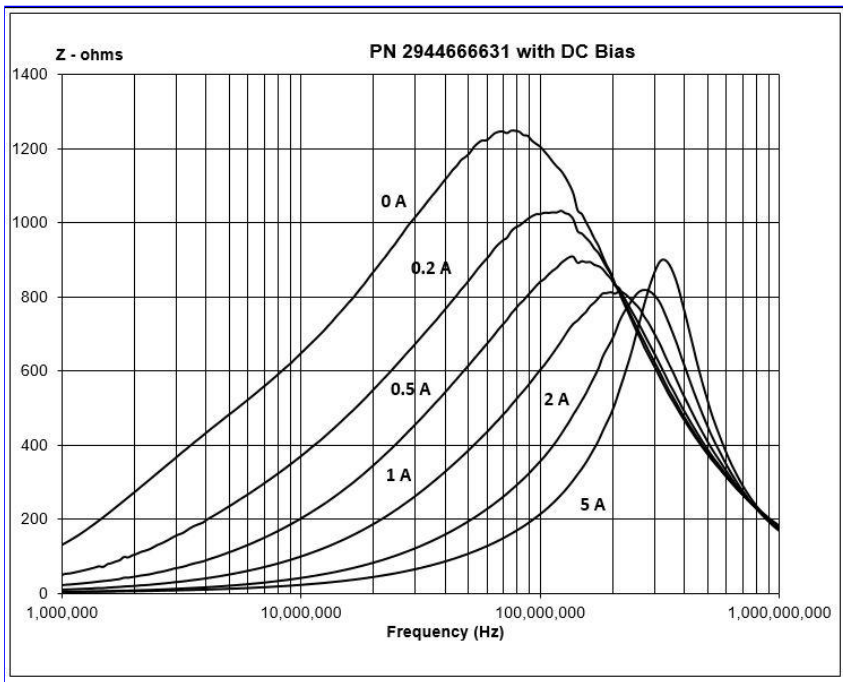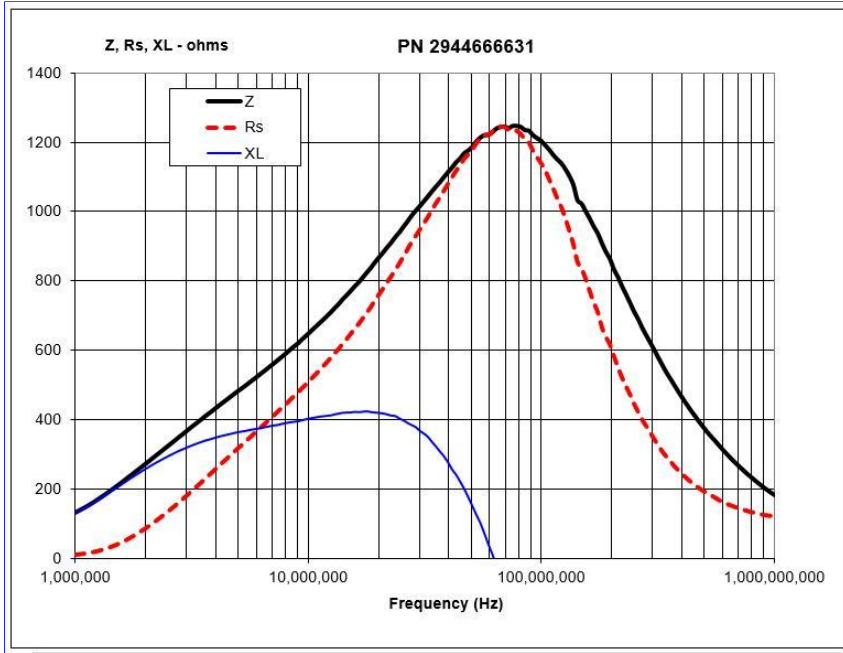

[CSV Download](#)

Fair- Rite Products Corp. • One Commercial Row, Wallkill, New York 12589-0288  
888-324-7748 • 845-895-2055 • Fax: 845-895-2629 • [\[email protected\]](#) • [www.fair-rite.com](http://www.fair-rite.com)