


MATERIAL NUMBER	OLD PART NUMBER
120115-0022	702P801


DIMENSIONAL

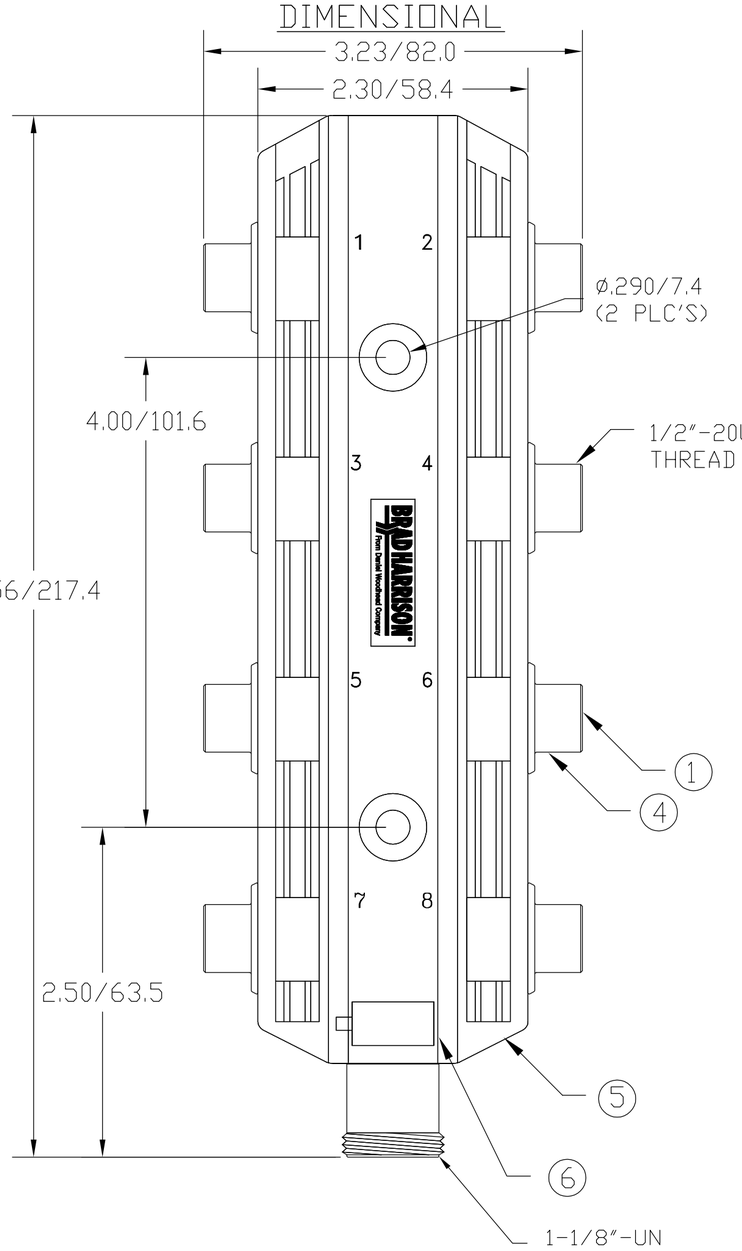


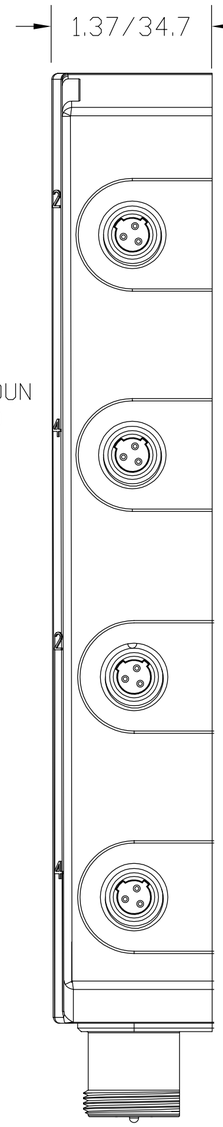


SCHEMATIC

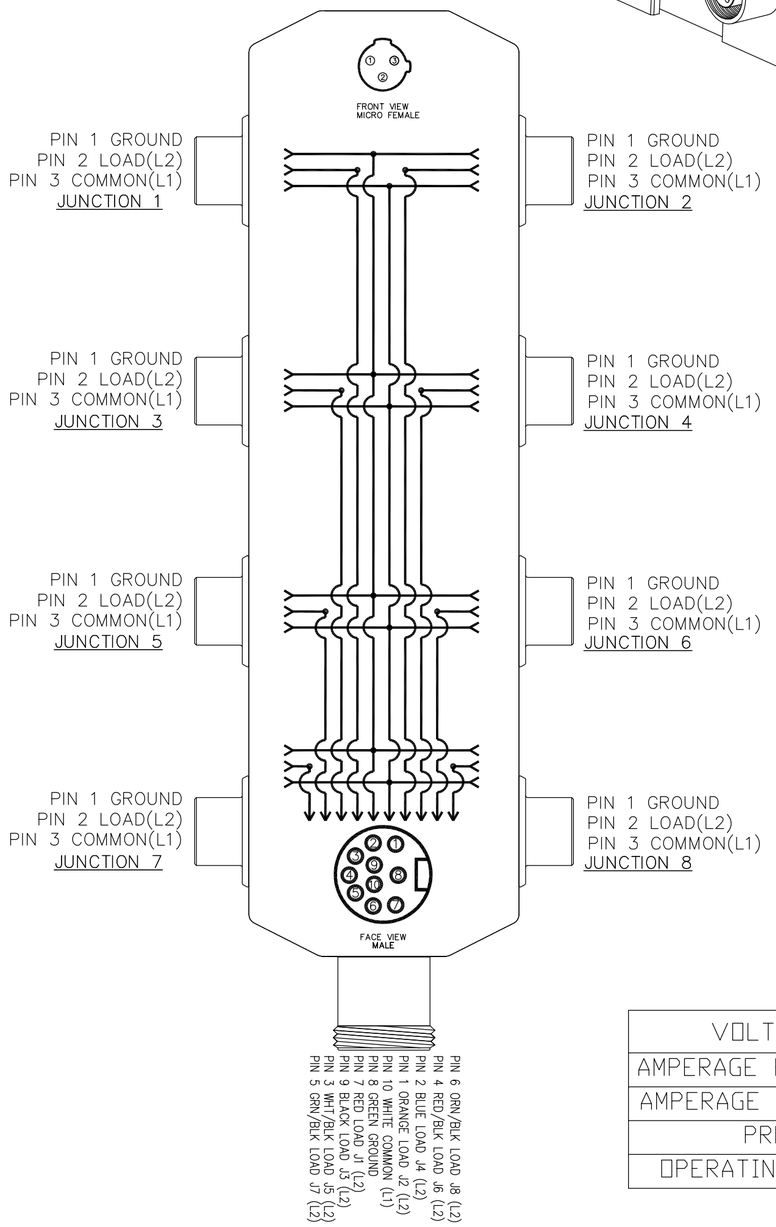

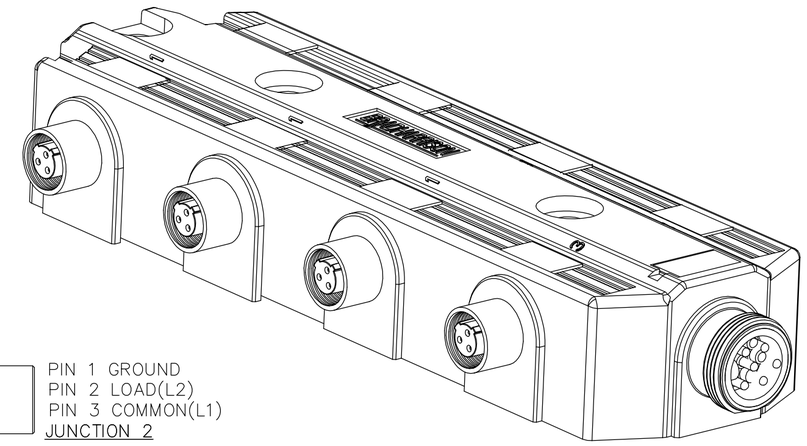



FEMALE FACE VIEW



MALE FACE VIEW

VOLTAGE RATING	120 VAC/VDC
AMPERAGE RATING PER PORT	4 AMPS
AMPERAGE RATING PER UNIT	8 AMPS
PROTECTION	IP67
OPERATING TEMPERATURE	-25°C TO 90°C

ITEM	COMPONENT	MATERIAL	FINISH
1	INSERT	NLYON	BLACK
2	CONTACT SOCKET	COPPER ALLOY	GOLD OVER NICKEL
3	CONTACT PIN	COPPER ALLOY	GOLD OVER NICKEL
4	RECEPTACLE SHELL	ZINC DIE CAST	BLACK E-COATED
5	HOUSING	PBT	BLACK
6	LABEL	ABS	WHITE
	POTTING MATERIAL	EPOXY	BLACK

RLSD DRAWING
EC NO: WNA2010-0139 8/27/09
DRWN: BWOODMAN
CH'KD: JM
APPR: JFMURPHY 2009/08/31
REV: A
DESCRIPTION: —

QUALITY SYMBOL
▼=0
Ⓒ=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	±----	±----
3 PLACES	±----	±----
2 PLACES	±----	±.01
1 PLACE	±0.3	±----

ANGULAR ±----°

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: IN/MM
SCALE: ----
DESIGN UNITS: ----
THIRD ANGLE PROJECTION

DRAWN BY: BW DATE: 2009/03/26
CHECKED BY: LH DATE: 2009/03/26
APPROVED BY: JFMURPHY DATE: 2009/08/28
MATERIAL NO.: SEE CHART

TITLE
MICRO DUALKEY 8 PORT
3 POLE MPIS

molex MOLEX INCORPORATED

DOCUMENT NO.: SD-120115-005
SHEET NO.: 1 OF 1
SIZE: C

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION