
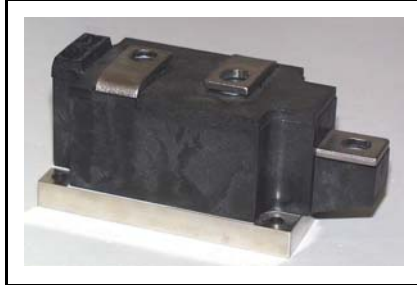


Powerex, Inc., 173 Pavilion Lane, Youngwood, Pennsylvania 15697 (724) 925-7272
www.pwr.com

POW-R-BLOK™ Dual Diode Isolated Module 260 Amperes / Up to 2400 Volts

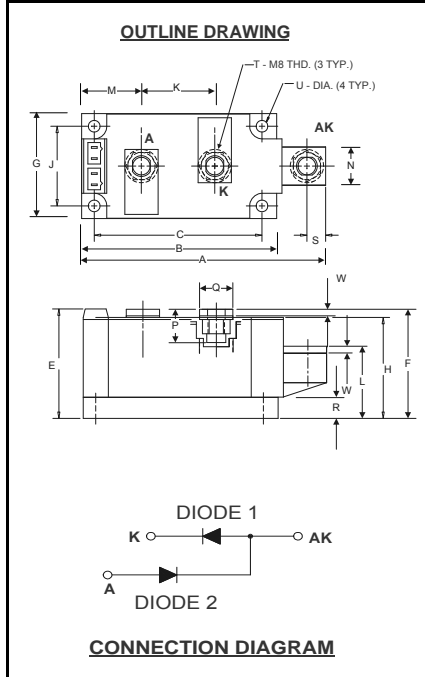

ND41__26
Dual Diode Isolated
POW-R-BLOK™ Module
260 Amperes / 600-2400 Volts

Description:

Powerex Dual Diode Modules are designed for use in applications requiring rectification and isolated packaging. The modules are isolated for easy mounting with other components on a common heatsink. *POW-R-BLOK™* has been tested and recognized by the Underwriters Laboratories.

Features:

- Electrically Isolated Heatsinking
- Aluminum Nitride Isolator
- Compression Bonded Elements
- Metal Baseplate
- Low Thermal Impedance for Improved Current Capability
- UL Recognized

Benefits:

- No Additional Insulation Components Required
- Easy Installation
- No Clamping Components Required
- Reduce Engineering Time

Applications:

- Bridge Circuits
- AC & DC Motor Drives
- Battery Supplies
- Power Supplies
- Large IGBT Circuit Front Ends

ND41 Outline Dimensions

| Dimension | Inches | Millimeters |
|-----------|-----------|-------------|
| A | 4.57 | 116 |
| B | 3.66 | 93 |
| C | 3.15 | 80.0 |
| E | 2.06 | 52.3 |
| F | 2.05 | 52.0 |
| G | 1.97 | 50.0 |
| H | 1.90 | 48.3 |
| J | 1.50 | 38.1 |
| K | 1.38 | 35.0 |
| L | 1.26 | 32.0 |
| M | 1.122 | 28.5 |
| N | .71 | 18.0 |
| P | .57 | 14.5 |
| Q | .625 | 15.9 |
| R | .394 | 10.00 |
| S | .350 | 8.9 |
| T | M8 Metric | M8 |
| U | .250 Dia. | 6.35 Dia. |
| W | .12 | 3.0 |

Note: Dimensions are for reference only.

Ordering Information:

Select the complete eight digit module part number from the table below.

Example: ND412026 is a 2000Volt, 260 Ampere Dual Diode Isolated *POW-R-BLOK™* Module

| Type | Voltage Volts (x100) | Current Amperes (x10) |
|------|----------------------------|-----------------------------|
| ND41 | 06 | 26 |
| | 08 | |
| | 10 | |
| | 12 | |
| | 14 | |
| | 16 | |
| | 18 | |
| | 20 | |
| | 22 | |
| | 24 | |

Absolute Maximum Ratings

| Characteristics | Conditions | Symbol | | Units |
|--|--|--------------|-----------------|-------------------------|
| Repetitive Peak Reverse Blocking Voltage | | V_{RRM} | up to 2400 | V |
| Non-Repetitive Peak Reverse Blocking Voltage (t < 5 msec) | | V_{RSM} | $V_{RRM} + 200$ | V |
| RMS Forward Current | 180° Conduction, $T_C=112^{\circ}\text{C}$ | $I_{F(RMS)}$ | 408 | A |
| Average Forward Current | 180° Conduction, $T_C=112^{\circ}\text{C}$ | $I_{F(AV)}$ | 260 | A |
| Peak One Cycle Surge Current, Non-Repetitive | 60 Hz, 100% V_{RRM} reappplied | I_{FSM} | 8000 | A |
| Peak Three Cycle Surge Current, Non-Repetitive | 60 Hz, 100% V_{RRM} reappplied | I_{FSM} | 5750 | A |
| Peak Ten Cycle Surge Current, Non-Repetitive | 60 Hz, 100% V_{RRM} reappplied | I_{FSM} | 4975 | A |
| I^2t for Fusing for One Cycle, 8.3 milliseconds | | I^2t | 266,000 | $\text{A}^2 \text{sec}$ |
| Operating Temperature | | T_J | -40 to +150 | $^{\circ}\text{C}$ |
| Storage Temperature | | T_{stg} | -40 to +150 | $^{\circ}\text{C}$ |
| Max. Mounting Torque, M6 Mounting Screw | | | 45 5 | in.-Lb. Nm |
| Max. Mounting Torque, M8 Terminal Screw | | | 110 12 | in.-Lb. Nm |
| Module Weight, Typical | | | 840 1.85 | g lb. |
| V Isolation @ 25C | | V_{rms} | 2500 | V |

Electrical Characteristics, T_J=25°C unless otherwise specified

| Characteristics | Symbol | Test Conditions | Min. | Max. | Units |
|--|--------------------|--|------|-----------|-------|
| Repetitive Peak Reverse Leakage Current | I _{RRM} | Up to 2400V, T _J =150°C | | 50 | mA |
| Peak On-State Voltage | V _{FM} | I _{FM} =1500A | | 1.35 | V |
| Threshold Voltage, Low-level | V _{(TO)1} | T _J = 150°C, I = 15%I _{F(AV)} to πI _{F(AV)} | | 0.764 | V |
| Slope Resistance, Low-level | r _{T1} | | | 0.360 | mΩ |
| Threshold Voltage, High-level | V _{(TO)2} | T _J = 150°C, I = πI _{F(AV)} to I _{FSM} | | .710 | V |
| Slope Resistance, High-level | r _{T2} | | | 0.420 | mΩ |
| V _{TM} Coefficients, Full Range | | T _J = 150°C, I = 15%I _{F(AV)} to I _{FSM} | A = | 0.7140 | |
| | | | B = | 0.0232 | |
| | | V _{FM} = A+ B Ln I + C I + D Sqrt I | C = | 4.72 E-4 | |
| | | | D = | -6.71 E-3 | |
| Diode Reverse Recovery Time (Typical) | t _{rr} | I _{fm} = 1500A, T _p = 190 μs di/dt = -25A/μs | | 10 | μs |


Thermal Characteristics

| Characteristics | Symbol | | Max. | Units |
|---|-------------------|--|--|---|
| Thermal Resistance, Junction to Case | R _{ΘJ-C} | Per Module, both conducting | 0.07 | °C/W |
| | | Per Junction both conducting | 0.14 | °C/W |
| Thermal Impedance Coefficients | Z _{ΘJ-C} | Z _{ΘJ-C} = K ₁ (1-exp(-t/τ ₁)) + K ₂ (1-exp(-t/τ ₂)) + K ₃ (1-exp(-t/τ ₃)) + K ₄ (1-exp(-t/τ ₄)) | K ₁ = 5.27E-3 K ₂ = 1.17E-2 K ₃ = 5.26E-2 K ₄ = 6.97E-2 | τ ₁ = 1.69E-4 τ ₂ = 2.07E-2 τ ₃ = 2.37E-1 τ ₄ = 2.46 |
| Thermal Resistance, Case to Sink Lubricated | R _{ΘC-S} | Per Module | 0.03 | °C/W |


Powerex, Inc., 173 Pavilion Lane, Youngwood, Pennsylvania 15697 (724) 925-7272
www.pwr.com

POW-R-BLOK™ Dual Diode Isolated Module 260 Amperes / Up to 2400 Volts


Maximum On-State Forward Voltage Drop
($T_J = 150^\circ\text{C}$)

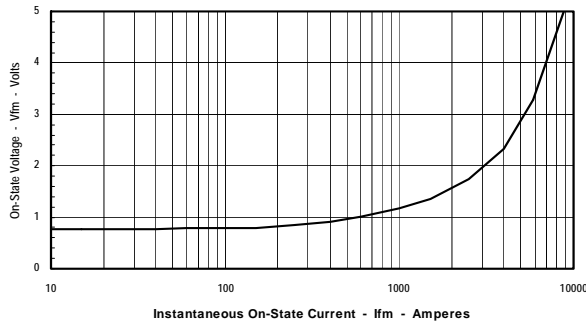


Maximum Transient Thermal Impedance
(Junction to Case)

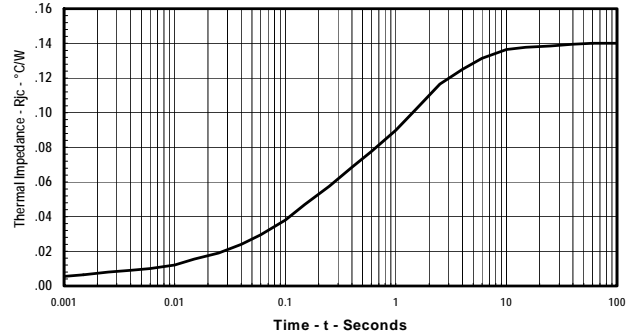


Maximum On-State Power Dissipation
(Sinusoidal Waveform)

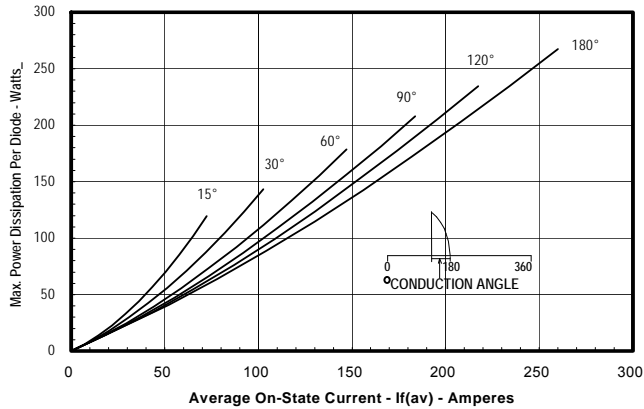

Maximum Allowable Case Temperature
(Sinusoidal Waveform)

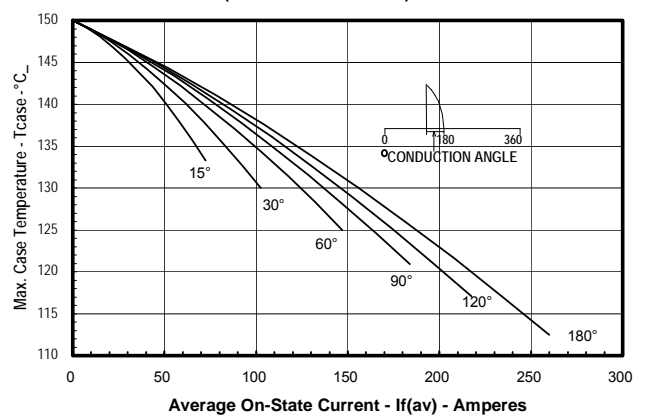

Maximum On-State Power Dissipation
(Rectangular Waveform)

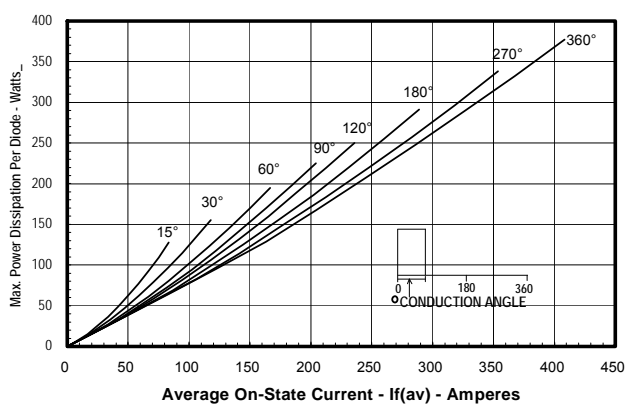

Maximum Allowable Case Temperature
(Rectangular Waveform)

