APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	4/6/05	
A		REDRAWN	11/16/11	
B		REVISED SPEC.	1/8/13	

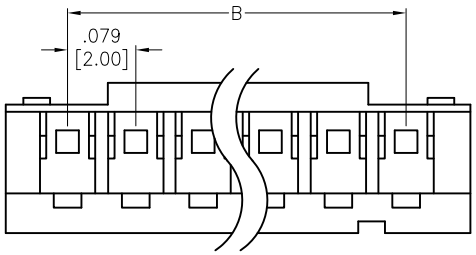

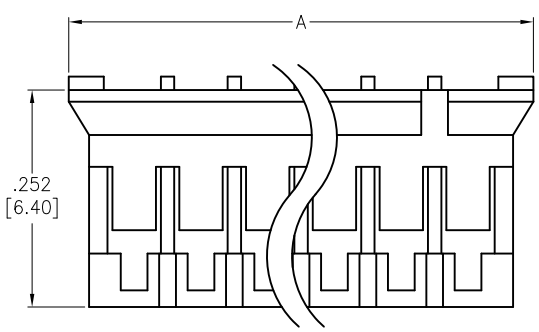



Positions: 2 thru 20
A = .079 [2.00] x No. of Spaces + .150 [3.80]
B = .079 [2.00] x No. of Spaces

SPECIFICATIONS:
Material:
Insulator: Nylon 66, rated UL 94V-2
Insulator color: White
Electrical:
Operating voltage: 150 VAC max
Current rating: 2 Amp max
Insulation resistance: 1,000 Mohms min @ 500 VDC
Dielectric withstanding voltage: 800 VAC for 1 minute
Temperature Rating:
Operating temperature: -25°C to +85°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	SS	4/6/05
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
.079 [2.00] CRIMP HOUSING
LOW PROFILE, DUAL POLARIZED

SIZE	PART NO.	REV.
X	2CH-C-XX	B

REF:	SCALE:	SHEET
S00016T	NTS	1 OF 1