


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	4/13/06	
A		REDRAWN	1/10/14	AY/LL

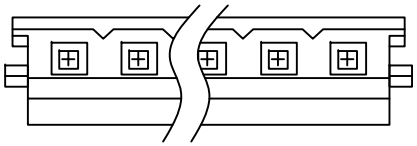

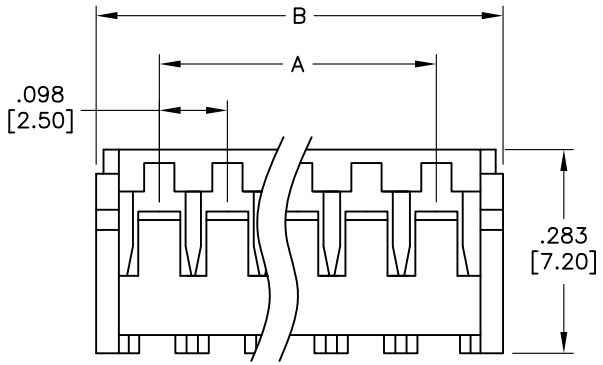



Positions: 2 thru 15
A = .098 [2.50] x No. of Spaces
B = .098 [2.50] x No. of Spaces + .169 [4.30]

SPECIFICATIONS:
Material:
Insulator: Nylon 66 UL 94V–0
Insulator color: White
Electrical:
Operating voltage: 250 V AC/DC
Current rating: 3A AC/DC
Insulation resistence: 1,000Mohms Min.
Dielectric withstanding voltage: 800V AC for 1 MIN.
Temperature Rating:
Operating temperature: –25°C to +85°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	LFJ	4/13/06
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
WIRE TO BOARD PITCH: 2.5MM
CRIMP HOUSING

SIZE	PART NO.	REV.
X	25CH-C-XX	A

REF:	SCALE:	SHEET
S00016T	NTS	1 OF 1