


Rev	AWO #	Description	Date	Appr
-		RELEASED	6/7/07	

APPROVED: _____


DATE: _____ TITLE: _____

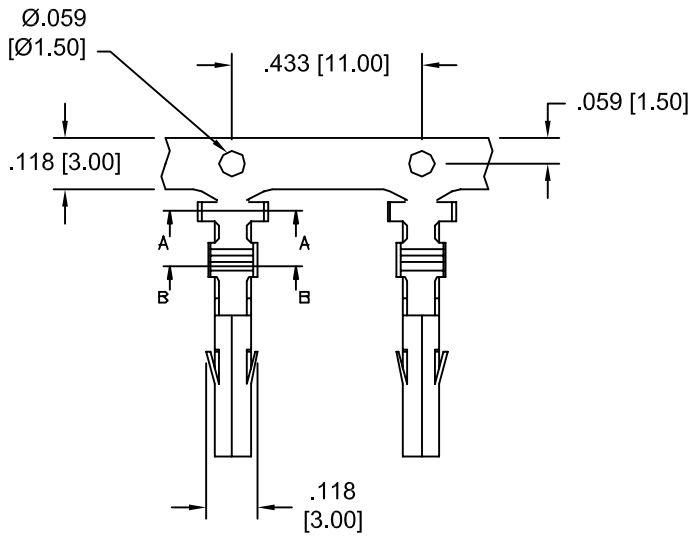

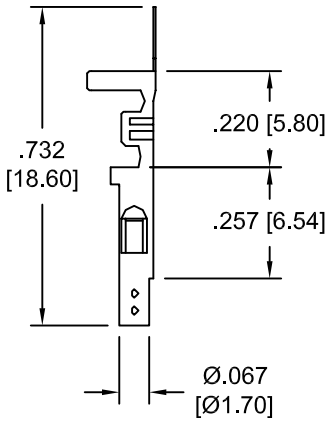



SEC A-A



SEC B-B

PART #	WIRE AWG	DIMENSIONS			
		C	D	E	F
DMH-A-C-F-B	22 ~ 26	.134 [3.4]	.130 [3.3]	.098 [2.5]	.090 [2.3]
DMH-B-C-F-B	18 ~ 22	.157 [4.0]	.177 [4.5]	.098 [2.5]	.090 [2.3]
DMH-C-C-F-B	16	.157 [4.0]	.177 [4.5]	.110 [2.8]	.106 [2.7]

SPECIFICATIONS:
Material:
Contacts: Brass
Plating:
Tin over Copper underplate overall
Electrical:
Operating voltage: 250 VAC max
Current rating: 5 Amps max
Contact resistance: 20 mohms max
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	SS	6/7/07
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: CRIMP CONTACT, DMH SERIES
FEMALE, TIN PLATED, BAGGED

SIZE	PART NO.	REV.
X	DMH-X-C-F-B	-

REF: | SCALE: NTS | SHEET 1 OF 1