

PROPRIETARY INFORMATION:
PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK,INC.

REVISION

REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE, RFS.27300, DH	03/22/19	MK
B	CLARIFY THE CONNECTION FOR 'USBA' and 'USBC', RFS. 27554	7/15/20	MK
C	UPDATE CABLE DIMENSION TO 3.5±0.2mm , RFS. 27730	7/13/22	MK

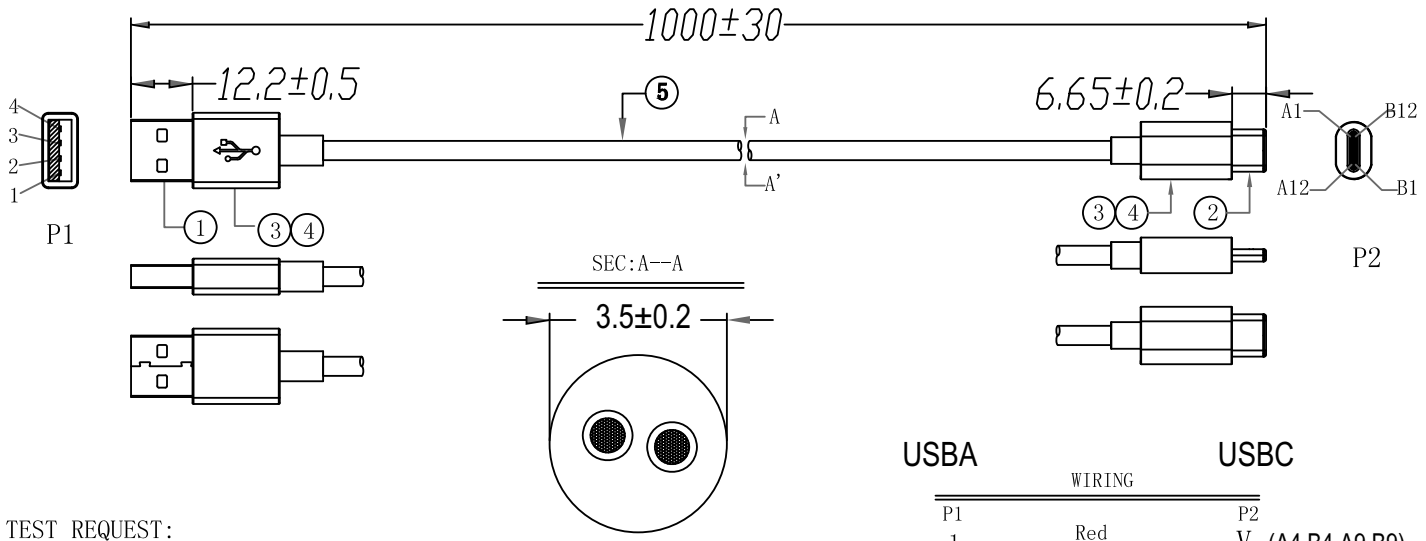

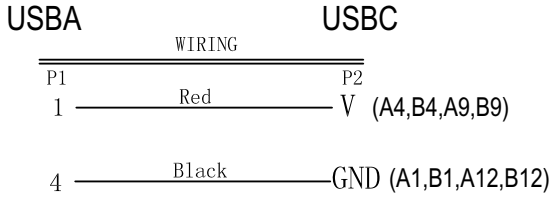

TEST REQUEST:

1) 100% OPEN, SHORT, MISS WIRE TEST.
2) Insulation resistance; DC300V 10Mohm Min.
3) Conductor resistance: 5 ohm Max

NO.	PARTS NAME	SPECIFICATION DESCRIPTION	QT'Y	UN.
5	Cable	22AWG (45/0.10BC)*2C(Red, Black) Jacket:OD3.0 White PVC	1000	mm
4	PE	LD-PE	5	G
3	Molding	45P PVC Color: White	10	G
2	USB C TYPE 2.0	USB TYPE C 2.0 Solder Type , The Pin Gold Plated , Shell Nickel Plated	1	PC
1	USB A/Male	USB A/Male, Solder Type, The Pin Gold Plated, Shell Nickel Plated	1	set

DASH NO.	PART NO	REV.	DESCRIPTION	NOTES

TABULATION BLOCK

Contents of this document are subject to change without prior notice

Foot Note:
Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applicable UL,CSA or EN Standards for proper installation instruction.

Limitation of Use:
Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.

INIT.BY: DH	DATE: 03/22/19	TOLERANCES: DECIMALS .xx +/- 0.1 .xxx +/- .005 ANGULAR +/- 1° MILLIMETERS .xx +/- 0.3 .xxx +/- .013 ANGULAR +/- 1°
DRAWN: NF	DATE: 03/22/19	FSCN No.: G, CC SIZE A
APRVD: MK	DATE: 03/22/19	SCALE: NONE

GlobTek, Inc.
www.globtek.com
186 Veterans Dr. Northvale, NJ 07647
Tel. 201-784-1000 Fax 201.784.0111

DWG TITLE: DETACHABLE USB CORD, USB A TO USB C TYPE 2.0, WHITE

MODEL: N / A

REV. C

PART NO: **USBA2C1M0USBC-WH(R)**

SHEET 1/1