


MATERIAL NUMBER	ENGINEERING PART NUMBER	FINISHED LENGTH
1200980199	MP3S62PP4M010	3.28' +2.19" -0 [1.0M +55.6 -0]
1200980153	MP3S62PP4M050	16.40' +6.50" -0 [5.0M +165.1 -0]

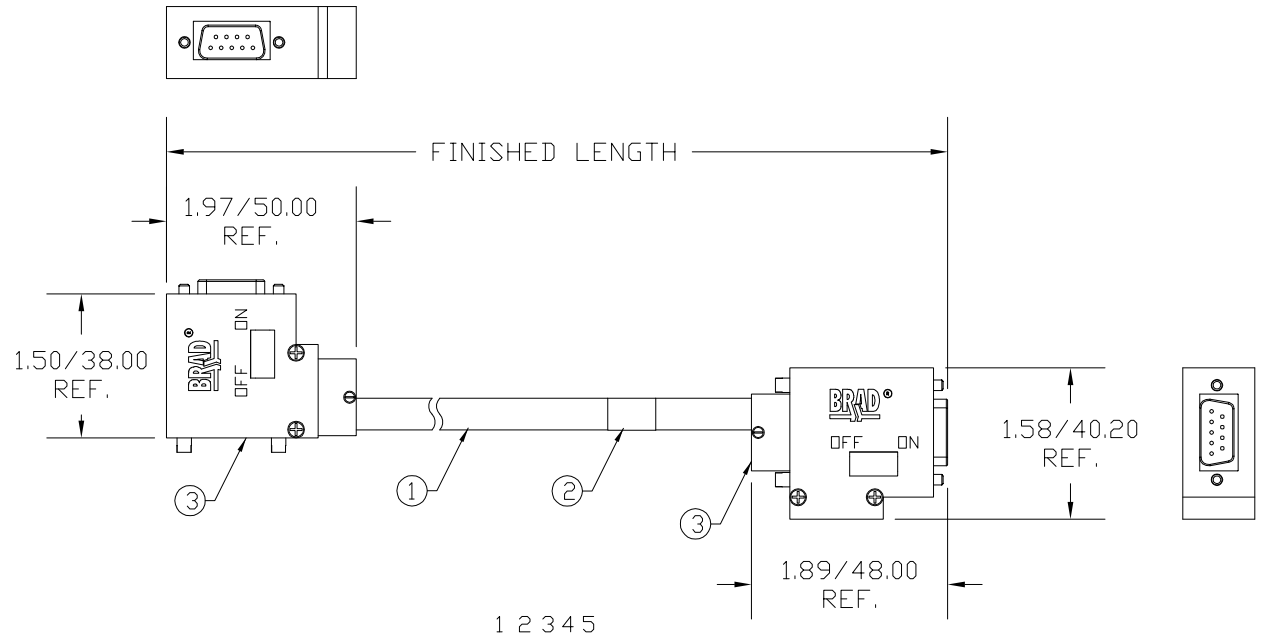



D-SUB FACE VIEW



WIRING DIAGRAM

VOLTAGE RATING	250 VAC/VDC
AMPERAGE RATING	4 AMPS
PROTECTION FOR D-SUB	IP40
OPERATING TEMPERATURE	-20°C TO 80°C

ITEM	COMPONENT	MATERIAL	FINISH
1	CABLE- 22 AWG, COPPER STRANDING) TWISTED PAIR SHIELD WITH BRAID	PUR	PURPLE
2	LABEL	MLYAR	BLACK/YELLOW
3	D-SUB	ABS	BLACK

RLSD DRAWING — 8/27/09
EC NO: WNA2010-0143
DRWN: TWOLDEGE
CH'KD: BWOODMAN
APPR: JFMURPHY 2009/08/28
DESCRIPTION
A
REV

QUALITY SYMBOLS
▼=0
Ⓒ=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	±----	±---
3 PLACES	±----	±---
2 PLACES	±----	±.01
1 PLACE	±0.3	±---
ANGULAR ±---°		

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: IN/MM
SCALE: ---
DESIGN UNITS: ----
THIRD ANGLE PROJECTION

DRAWN BY DATE: TWOLDEGE 2009/08/26
CHECKED BY DATE: BWOODMAN 2009/08/26
APPROVED BY DATE: JFMURPHY 2009/08/27
MATERIAL NO.: SEE CHART

TITLE: MICRO-CHANGE PROFIBUS 9P VERTI-HORIZ DSUB-DSUB PUR CABLE
MOLEX INCORPORATED
DOCUMENT NO.: SD-120098-026
SHEET NO.: 1 OF 1
SIZE: A

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION