


APPROVED: _____


DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	4/6/05	
A		REVISED SPEC.	6/7/12	

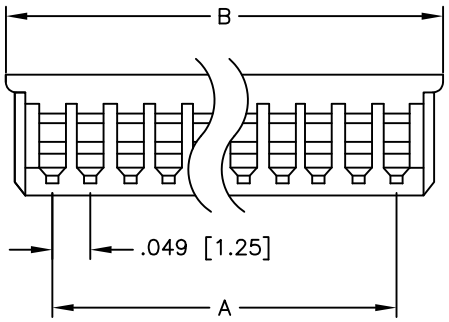




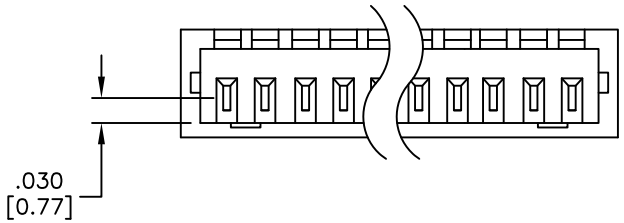



3 POSITION



2 POSITION

NOTE: 1 LOCK ON 2 & 3 POSITION

Positions: 2 thru 15
A = .049 [1.25] x No. of Positions−1
B = .049 [1.25] x No. of Positions + .068 [1.75]

5PECIFICATIONS:
Material:
Insulator: PBT, rated UL 94V−0
Insulator color: White
Electrical:
Operating voltage: 125 VAC max
Current rating: 1 Amp max
Insulation resistance: 100 Mohms min @ 500 VDC
Dielectric withstanding voltage: 250 VAC for 1 minute
Temperature Rating:
Operating temperature: −25°C to +85°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	SS	4/6/05
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .049" [1.25mm] CRIMP HOUSING
LOW PROFILE, DUAL POLARIZED

SIZE	PART NO.	REV.
X	125CH-A-XX	A

REF: | SCALE: NTS | SHEET 1 OF 1