
APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	1/4/19	
A		UPDATE SPEC.	11/3/20	OW/EY

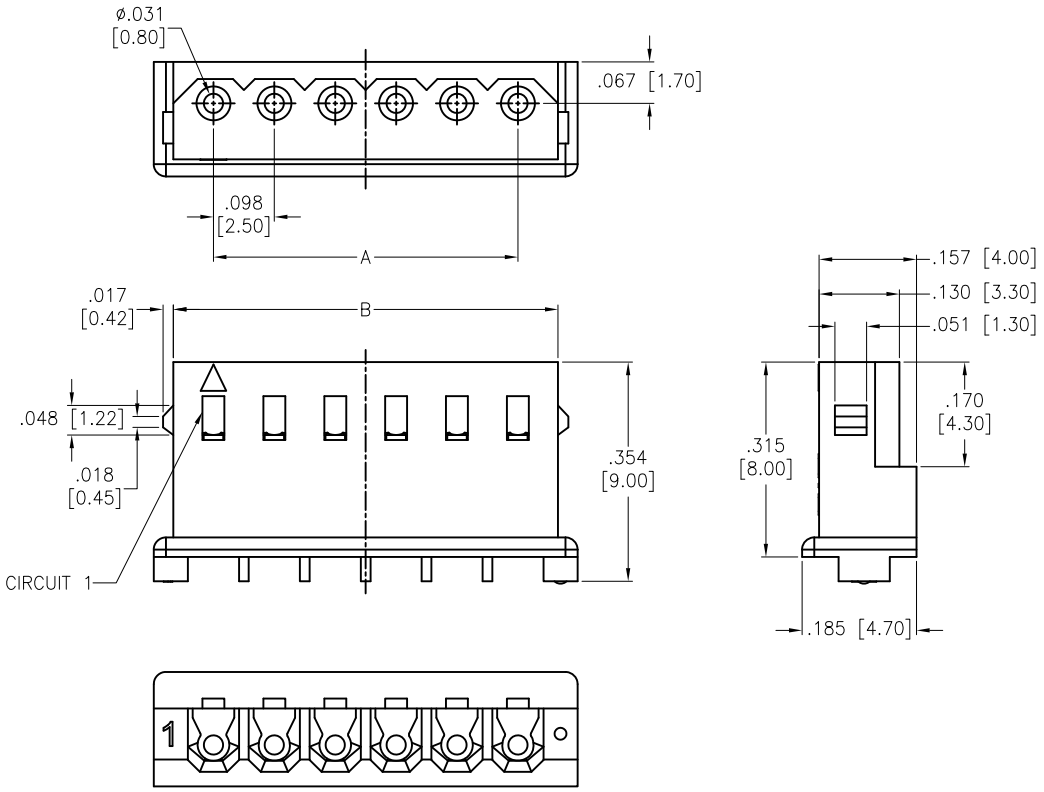

Positions: 02 thru 16
A = .098 [2.50] x No. of Spaces
B = .098 [2.50] x No. of Spaces + .130 [3.30]

SPECIFICATIONS:
Material:
Insulator: Nylon66, UL 94V-0
Insulator color: Beige
Electrical:
Voltage rating: 250 VAC/DC
Current rating: 3 A AC/DC
Contact resistance: 20 mohms max.
Insulation resistence: 1,000 Mohms min.
Dielectric withstanding voltage: 1,000V AC for 1 minute
Temperature Rating:
Temperature range: -25°C to +85°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	HR	1/4/19
CHECKED	MY	1/4/19
APPROVED		

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
.098 [2.50] SHROUDED CRIMP THERMINAL HOUSING

SIZE	PART NO.	REV.
X	25CH-E6-XX	A

REF:	SCALE:	SHEET
S00186T	NTS	1 OF 1