

Squint™ ISM Ceiling/Surface Mount Dipole Antenna

SQ2403PG



SQUINT™ ISM CEILING/SURFACE MOUNT DIPOLE ANTENNA

Laird recently engineered an omnidirectional Squint™ ISM band patch antenna with a 3.5 dBi dipole-like pattern shape and ceiling mount feature which provides an extremely low profile for minimum visual impact. This antenna provides for reception and transmission in the 2400-2500 MHz frequency band. The radiation pattern has a 50 degree beamwidth with the maximum directed at 45 degrees from the horizontal plane. A key feature of the Squint™ antenna is the use of a unique air dielectric design called MicroAir™, which eliminates losses associated with etched circuit boards and provides higher performance. Measuring only 4-3/32 x 4-3/32 x 7/8" (10.4 x 10.4 x 2.2 cm), this ultracompact, high performance antenna provides coverage for large indoor open spaces, locations with high ceilings and many places where extended coverage is needed. The total weight of the antenna is 4 ounces (114 grams). The antenna housing is vacuum thermoplastic. Standard models are white in color with a textured finish. Custom configurations of radome finish, color and texture can be provided to complement and blend within any environment, making it an ideal solution to meet the most demanding aesthetic requirements in today's workplace environments. Each Squint™ has a VSWR of 1:5:1 on 50 ohms impedance and comes with a standard 1-foot plenum coax and N-female connector. Additional connector and coax configurations are available upon request. The mounting system installs to build out seamless microcellular and picocellular cell sites quickly and efficiently. Applications for Squint™ include wireless telephone booths, industrial complexes, office environments, shopping malls, parking garages, airports, hospitals, campus settings and more.


FEATURES RoHS

- Ultra compact, high performance
- Omnidirectional, ISM band
- Connector types optional
- Ceiling mount

MARKETS

- Wireless telephone booths
- Industrial complexes
- Office environments
- Shopping centers and parking garages
- Hospitals and campus settings
- Transportation centers

ANTENNA PATTERN

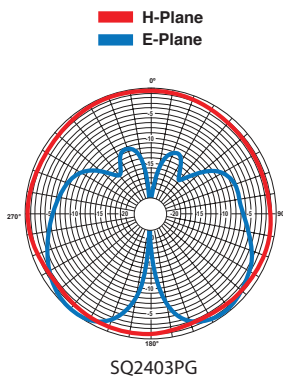

Model / Part Number	SQ2403PG12NF	SQ1852PG12NF
Frequency MHz:	2400-2500	1850-1990
Impedance (Ohms)	50	50
Gain dBi	3.5	2.5
VSWR:	1.5:1	1.5:1
Polarization:	Linear	Linear
Beamwidth E-Plane, deg.	50° (Peak @ 45°)	50° (Peak @ 45°)
RF Connector (f)	N	N
Dimensions in. (cm)	4 x 4 x 7/8 (10.2 x 10.2 x 2.2)	4 x 4 x 7/8 (10.2 x 10.2 x 2.2)
Mount Style	Ceiling	Ceiling
Weight lb (kg)	.52 (.23)	.20 (.10)

Americas: +1.847.839.6907
IAS-AmericasEastSales@lairdtech.com

Europe: +44.1628.858941
IAS-EUSales@lairdtech.com

Asia: ++86.21.5855.0827.127
IAS-AsiaSales@lairdtech.com

www.lairdtech.com

ANT-DS-SQ2403PG 1113

Any information furnished by Laird and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird materials rests with the end user, since Laird and its agents cannot be aware of all potential uses. Laird makes no warranties as to the fitness, merchantability or suitability of any Laird materials or products for any specific or general uses. Laird, Laird Technologies, Inc or any of its affiliates or agents shall not be liable for incidental or consequential damages of any kind. All Laird products are sold pursuant to the Laird Technologies' Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2013 Laird Technologies, Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Technologies Logo, and other marks are trademarks or registered trademarks of Laird Technologies, Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird or any third party intellectual property rights.