

6

5

4

3



2

1



Rev	AWO #	Description	Date	Appr
-		RELEASED	1/4/09	

APPROVED: _____

DATE: _____ TITLE: _____

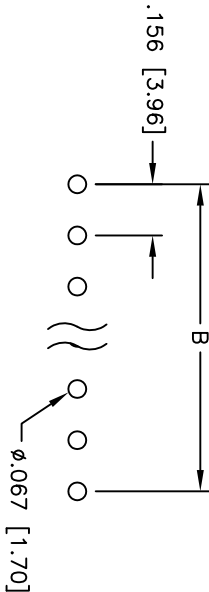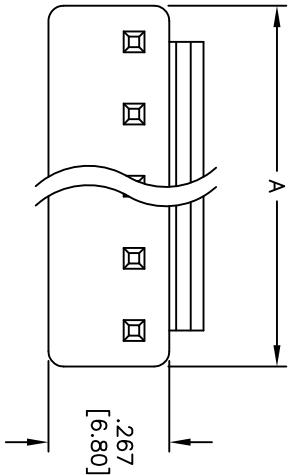

PCB LAYOUT

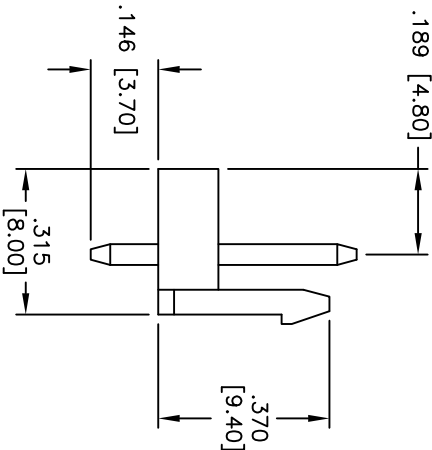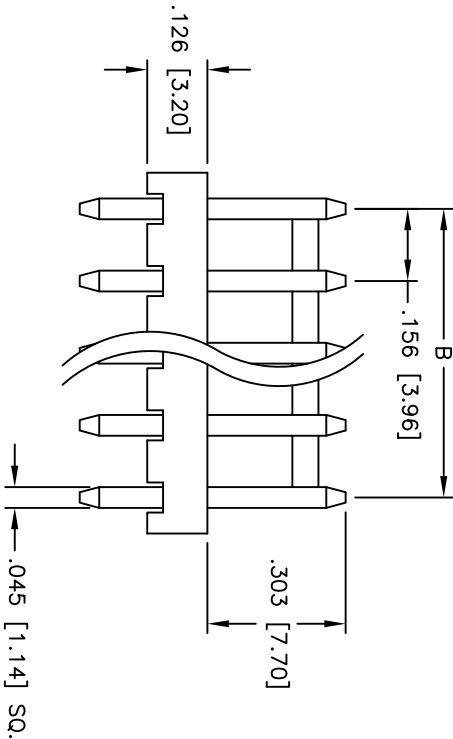

SPECIFICATIONS:

Material:

Insulator: Nylon 66, rated UL 94V-0

Insulator color: White

Contacts: Brass

Plating:

Tin over Copper underplate overall

Electrical:

Operating voltage: 250 VAC max

Current rating: 7 Amps max

Contact resistance: 20 mohms max

Insulation resistance: 1,000 Mohms min

Dielectric withstanding voltage: 1,500 VAC for 1 minute

Temperature Rating:

Operating temperature: -25°C to +85°C

Environmental:

Lead free, RoHS compliant



Positions: 2 thru 12
A = .156 [3.96] x No. of Positions
B = .156 [3.96] x No. of Spaces

ADAM TECH

909 Railway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

.156 [3.96] POWER HEADER

STRAIGHT, WITH REAR LOCK

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES .X ± .10 ØX ± .10 .XX ± .020 ØXX ± .015 .XXX ± .015 ØXXX ± .010				ADAM TECH 909 Railway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710			
APPROVALS		DATE		TITLE .156 [3.96] POWER HEADER STRAIGHT, WITH REAR LOCK			
DRAWN	SS	1/4/09		SIZE PART NO.			
CHECKED				X LHC-XX-TS-V0			
APPROVED				REF: SCALE: NTS		SHEET 1 OF 1	REV. -