


VIEW / Ansicht X
MATING SIDE
FEMALE CABLE CONNECTOR
Steckseite
Kabeldose
4-Pol

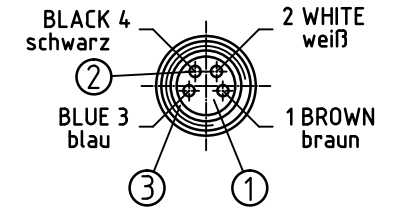

BRAIDED SHIELD CONNECTED TO FEMALE CABLE CONNECTOR
Schirmgeflecht an Kabeldose angeschlossen

CABLE/Leitung 4x0.25 BLACK/schwarz PUR-SHLD-D4.8

CABLE PRINTING:
Kabelbedruckung: Molex Connectivity GmbH "Material-No." X..

PROD. DATE
Fertigungsdatum

CONNECTOR SPECIFICATION:

VOLTAGE RATING	30 V
AMPERAGE RATING	3 AMPS
PROTECTION	IP67
OPERATING TEMPERATURE	-25°C TO +90°C

ITEM	COMPONENT	MATERIAL	FINISH
1	INSERT	PUR / BLACK	---
2	CONTACT SOCKET	COPPER ALLOY	GOLD OVER NICKEL
3	O-RING	VITON / RED	---
4	COUPLING NUT	BRASS	NICKEL PLATED
5	OVERMOLD	TPE / BLACK	---
6	CABLE- 4x0.25 24 AWG	PUR / BLACK	---

DESCRIPTION EC NO: WEU2011-0567 DRWN: BBRAUCH 2011/05/10 CHKD: REISSNER APPR: REISSNER 2011/06/08	QUALITY SYMBOLS ▽ = 0 ▽ = 0	GENERAL TOLERANCES (UNLESS SPECIFIED) mm INCH 4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± --- ± --- 1 PLACE ± 0.3 ± --- ANGULAR ± --- ° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	DIMENSION STYLE MM ONLY DRAWN BY DATE BBRAUCH 2011/05/10 CHECKED BY DATE REISSNER 2011/05/10 APPROVED BY DATE REISSNER 2011/06/08 MATERIAL NO. 1200865357	SCALE 2:1 DESIGN UNITS METRIC THIRD ANGLE PROJECTION M8S-4P-FE-STR-PURSHLD-5M MOLEX INCORPORATED SD-120086-273 SHEET NO. 1 OF 1