
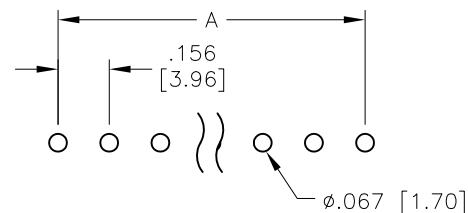




APPROVED: \_\_\_\_\_

DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

| Rev | AWO # | Description  | Date     | Appr  |
|-----|-------|--------------|----------|-------|
| -   |       | RELEASED     | 4/12/05  |       |
| A   |       | REVISED DIM. | 2/11/09  |       |
| B   |       | UPDATE spec. | 10/24/18 | AY/TY |

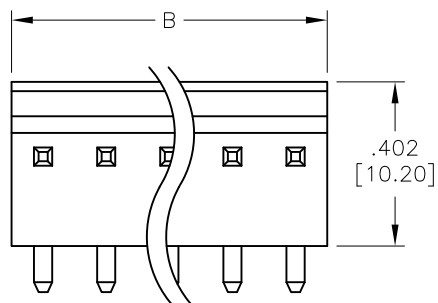

RECOMMENDED PCB LAYOUT

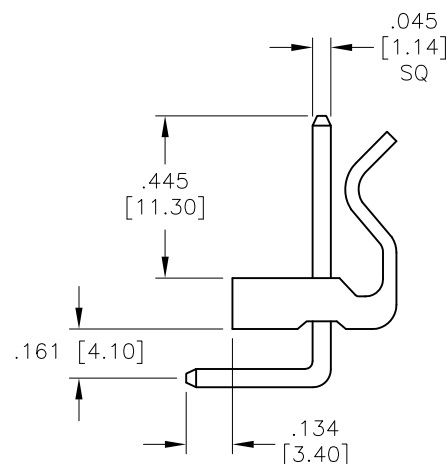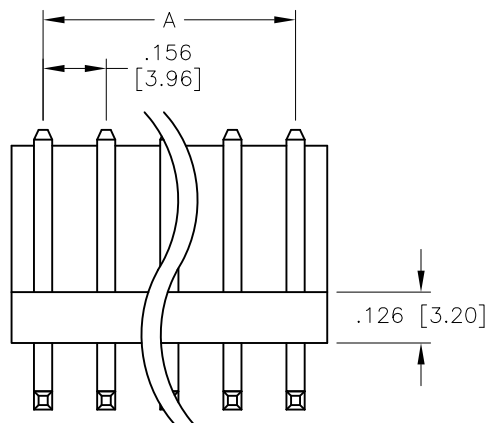

## SPECIFICATIONS:

Material:

Insulator: Nylon 66, rated UL 94V-2

Insulator color: White

Contacts: Brass

Plating:

Tin over Copper underplate overall

Electrical:

Voltage rating: 250V AC/DC

Current rating: 5 A AC/DC

Insulation resistance: 1,000 Mohms min

Dielectric withstanding voltage: 1,500 VAC for 1 minute

Temperature Rating:

-25°C to +85°C

Environmental:

Lead free, RoHS compliant



Positions: 2 thru 20

A = .156 [3.96] x No. of (Positions - 1)

B = .156 [3.96] x No. of positions

UNLESS OTHERWISE SPECIFIED  
ALL DIMENSIONS ARE INCHES [MM]  
TOLERANCES: EXCEPT AS NOTED  
INCHES HOLES  
.X ± .10 Ø.X ± .10  
.XX ± .020 Ø.XX ± .015  
.XXX ± .015 Ø.XXX ± .010

| APPROVALS |    | DATE    |
|-----------|----|---------|
| DRAWN     | SS | 4/12/05 |
| CHECKED   |    |         |
| APPROVED  |    |         |

**ADAM**  
**TECH**  
**INTERCONNECTS**

909 Rahway Avenue,  
Union, NJ 07083  
Phone: 908-687-5000  
Fax: 908-687-5710

TITLE  
.156 [3.96] POWER HEADER  
RIGHT ANGLE, WITH LOCK POLARIZER

|              |                        |              |
|--------------|------------------------|--------------|
| SIZE<br>X    | PART NO.<br>LHB-XX-SB1 | REV.<br>B    |
| REF: S00016T | SCALE: NTS             | SHEET 1 OF 1 |