

CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

more than you expect





ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:


PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	2-4 @20°C	0.11 ohms ±20%
D.C. RESISTANCE	7-9 @20°C	0.30 ohms ±10%
INDUCTANCE	2-4 100kHz, 100mVAC, Ls	180uH ±10%
INDUCTANCE	7-9 100kHz, 100mVAC, Ls	95uH ±10%
DIELECTRIC	1250VAC, 1 second	1000VAC, 1 minute
URNS RATIO	(4-2):(7-9)	1.384:1, ±1%

GENERAL SPECIFICATIONS:

Ⓟ OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

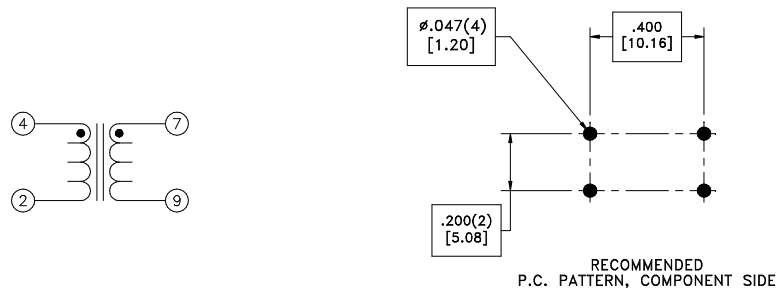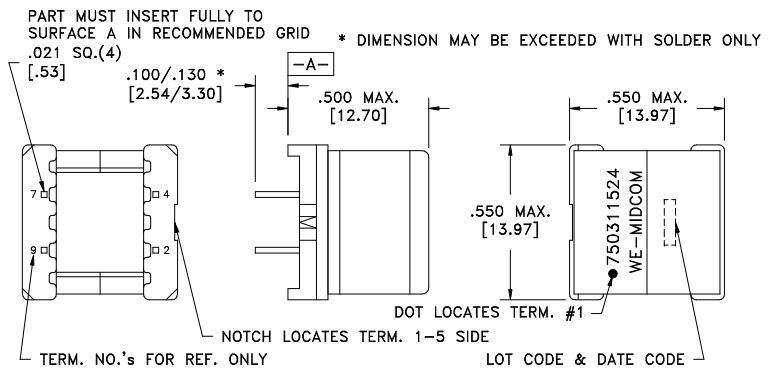

REV.	DATE	Packaging Specifications
6B	12/10	Method: Tray PKG-0318 www.we-online.com/midcom
6A	5/10	SEE REVISION SHEET FOR REVISION LEVEL



Tolerances unless otherwise specified:  
 Angles: ±1°      Decimals: ±.005 [.13]  
 Fractions: ±1/64      Footprint: ±.001 [.03]

This drawing is dual dimensioned. Dimensions in brackets are in millimeters.

DRAWING TITLE  
**TRANSFORMER**

eiSos p/n: 750311524

PART NO.  
**750311524**

compliant RoHS  
 SPECIFICATION SHEET 1 OF 1