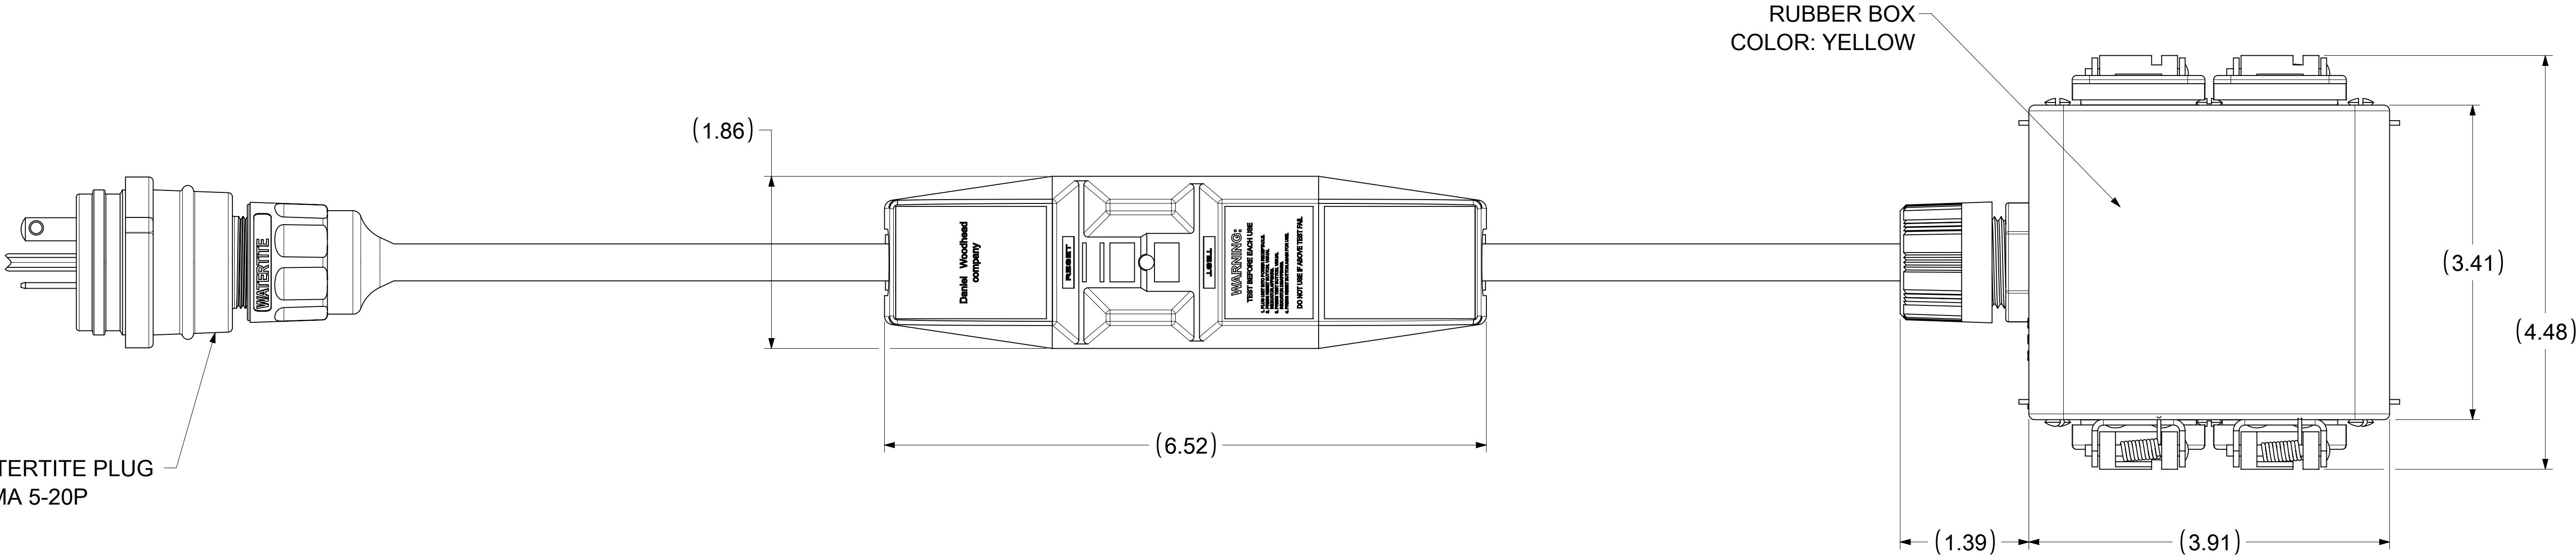


TECHNICAL

LISTED:	UL & CSA
RATED SUPPLY VOLTAGE:	120VAC
RATED CURRENT:	UP TO 15 AMPS
RESET TYPE:	MANUAL
OPERATING FREQUENCY:	60 Hz
TYPE:	CLASS A
GROUND TRIP CURRENT:	4-6 mA
OVERLOAD CURRENT:	90 AMP 125 VAC
INSULATION VOLTAGE:	1,500 VRMS - 1 MINUTE
ENDURANCE OPERATIONS:	3000 OPERATIONS
ENVIRONMENTAL RATING:	RAINPROOF RATED

MATERIAL NO.	ENGINEERING NO.	DESCRIPTION
1301530140	20053W-2	20A. IN-LINE GFCI W/PLUG & BOX
1301530143	20053W-6	20A. IN-LINE GFCI W/PLUG & BOX
1301530223	130153-0223	20A. IN-LINE GFCI BOX, NO PLUG

FUNCTIONAL SYMBOLS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION															
FA = 0		DIMENSION UNITS		SCALE		CURRENT REV DESC: NEW SALES DRAWING CREATED				molex IN-LINE GFCI WITH WATERTITE PLUG AND PORTABLE OUTLET BOX							
FC = 0		INCH		1:1		GENERAL TOLERANCES (UNLESS SPECIFIED)											
FP = 0		ANGULAR TOL		± °													
DIVISIONAL SYMBOLS		4 PLACES		±													
		3 PLACES		±													
		2 PLACES		±													
		1 PLACE		±		EC NO: 690704											
		0 PLACES		±		DRWN: VBASUTHKARP 2021/12/29											
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING		SERIES		DOCUMENT NUMBER		DOC TYPE		DOC PART		REVISION	
						D-SIZE		130153		1301530140		PSD		000		A	
										SEE TABLE		GENERAL MARKET					

DOCUMENT STATUS	P1	RELEASE DATE	2022/03/03	17:38:06
-----------------	----	--------------	------------	----------