
PROPRIETARY INFORMATION:
PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK,INC.

REVISION

REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE, RFS.12955, SO	02/08/08	BS
B	ADD NOTE TO PACKING, RFS. 13051, SO	02/25/08	BS
C	UPDATE PACKING, RFS. 13420, SO	04/15/08	BS

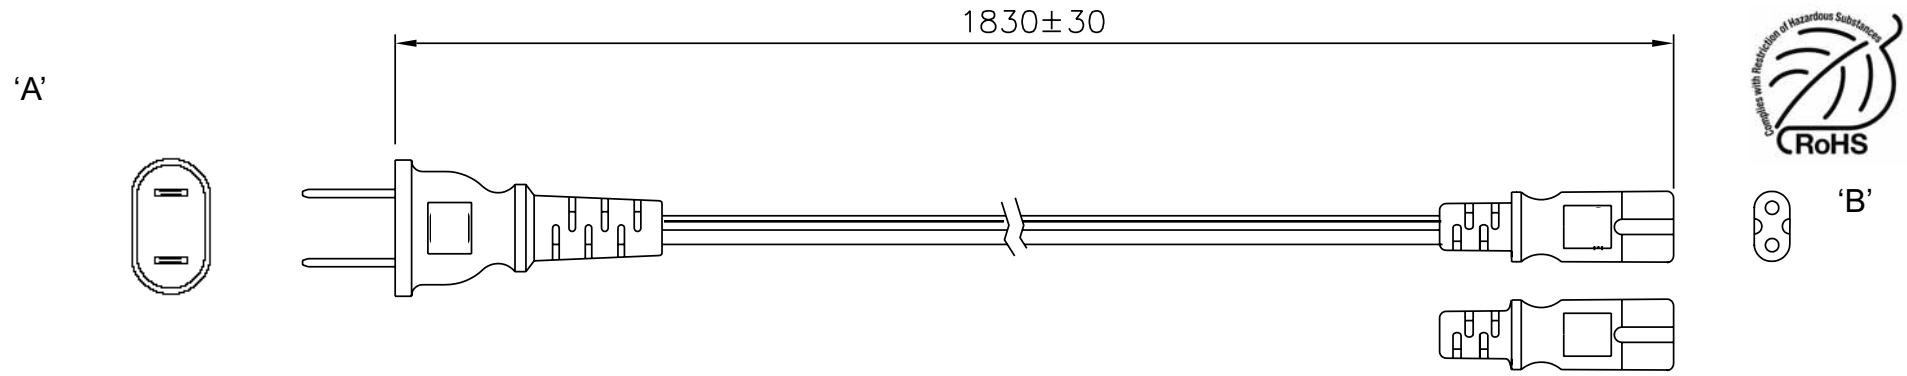

GENERAL SPECIFICATIONS:

RATING:	7A / 125V AC
CABLE TYPE / SIZE:	VFF, 2 x 0.75 mm²
TEMPERATURE RATING:	60° C
CABLE JACKET COLOR:	BLACK
OVERALL LENGTH (L):	1830 ± 30 mm
CABLE OUTER DIAMETER:	3.4 x 6.9 ± 0.2 mm
END 'A' TERMINATION:	JIS 8303
END 'B' TERMINATION:	IEC 320 /C7
APPROVALS PLUG:	PSE
APPROVALS CABLE:	PSE
APPROVALS CONNECTOR:	PSE


NOTES:

1. CORD, PLUG AND CONNECTOR MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S).

PACKING:

1. INDIVIDUALLY POLY BAGGED (100 pcs PER CARTON).
2. INDIVIDUALLY BAGGED CORDS MUST BE PACKED INSIDE A MASTER BAG BEFORE THEY ARE PACKED INTO A SHIPPING CARTON.

NOTE:200pcs/CTN.
100pcs/large poly bag, 2bags /CTN

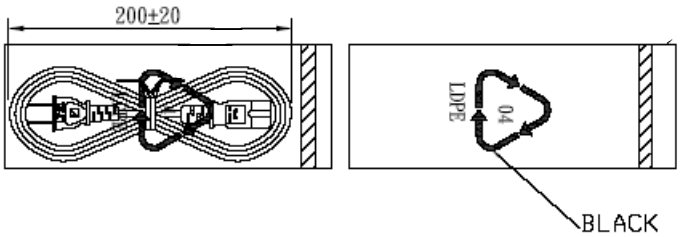

PSE

DASH NO.	PART NO	REV.	DESCRIPTION	NOTES
	TABULATION BLOCK			

TOLERANCES:
DECIMALS .xx +/- 0.1 .xxx +/- .005 ANGULAR +/- 1°
MILLIMETERS .xx +/- 0.3 .xxx +/- .013 ANGULAR +/- 1°

GlobTek, Inc.
www.globtek.com
186 Veterans Dr. Northvale, NJ 07647
Tel. 201-784-1000 Fax 201.784.0111

INIT.BY:SO[D]	DATE: 02/08/08	DWG TITLE: JAPAN DETACHABLE CORDSET		
DRAWN: NF	DATE: 02/08/08	FSCN No.: G, CC,YL	SIZE A	REV. C
APRVD: HM	DATE: 02/08/08	SCALE: NONE	PART NO: **451J3401M8703D(R)**	SHEET 1/1

Contents of this document are subject to change without prior notice

Foot Note:
Globtek Inc. will not be liable for the safety and performance of these power supplies if unauthorized access and repair occurs. End user should consult for the proper installation instruction the applicable UL,CSA and EN standards.

Limitation of Use:
Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.