1N5059 1N5061
1N5060 1N5062

GLASS PASSIVATED
SILICON RECTIFIERS
1.0 AMP, 200 THRU 800 VOLT



GPR-1A CASE

Central Semiconductor Corp.

www.centralsemi.com

DESCRIPTION:

The CENTRAL SEMICONDUCTOR 1N5059 series types are silicon rectifiers manufactured in a hermetically sealed, glass passivated package, designed for general purpose applications where high reliability is desired. Higher voltage devices are available in the CPR1-010 series.

MARKING: FULL PART NUMBER

MAXIMUM RATINGS: (T_A=25°C unless otherwise noted)

	SYMBOL	1N5059	1N5060	1N5061	1N5062	UNITS
Peak Repetitive Reverse Voltage	V_{RRM}	200	400	600	800	V
DC Blocking Voltage	V_R	200	400	600	800	V
RMS Reverse Voltage	$V_{R(RMS)}$	140	280	420	560	V
Average Forward Current (T_A=75°C)	I_O			1.0		A
Peak Forward Surge Current, tp=8.3ms	I_{FSM}			40		A
Operating and Storage Junction Temperature	T_J, T_{stg}			-65 to +175		°C
Thermal Resistance	Θ_{JA}			40		°C/W


ELECTRICAL CHARACTERISTICS: (T_A=25°C unless otherwise noted)

SYMBOL	TEST CONDITIONS	MAX	UNITS
I_R	V_R=Rated V_{RRM}	5.0	μA
I_R	V_R=Rated V_{RRM}, T_A=175°C (1N5059, 1N5060)	300	μA
I_R	V_R=Rated V_{RRM}, T_A=175°C (1N5061, 1N5062)	200	μA
V_F	I_F=1.0A	1.2	V
C_J	V_R=4.0V, f=1.0MHz	15	pF

1N5059 1N5061
1N5060 1N5062

GLASS PASSIVATED
SILICON RECTIFIERS
1.0 AMP, 200 THRU 800 VOLT

GPR-1A CASE - MECHANICAL OUTLINE

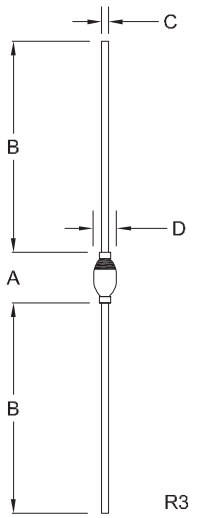

DIMENSIONS				
	INCHES		MILLIMETERS	
SYMBOL	MIN	MAX	MIN	MAX
A	-	0.240	-	6.10
B	1.000	-	25.40	-
C	0.028	0.034	0.71	0.86
D	0.070	0.150	1.80	3.81

GPR-1A (REV: R3)

MARKING: FULL PART NUMBER

OUTSTANDING SUPPORT AND SUPERIOR SERVICES

PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

REQUESTING PRODUCT PLATING

1. If requesting Tin/Lead plated devices, add the suffix " TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
2. If requesting Lead (Pb) Free plated devices, add the suffix " PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.
145 Adams Avenue
Hauppauge, NY 11788 USA
Main Tel: (631) 435-1110
Main Fax: (631) 435-1824
Support Team Fax: (631) 435-3388
www.centralsemi.com

Worldwide Field Representatives:
www.centralsemi.com/wwreps

Worldwide Distributors:
www.centralsemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: www.centralsemi.com/terms