


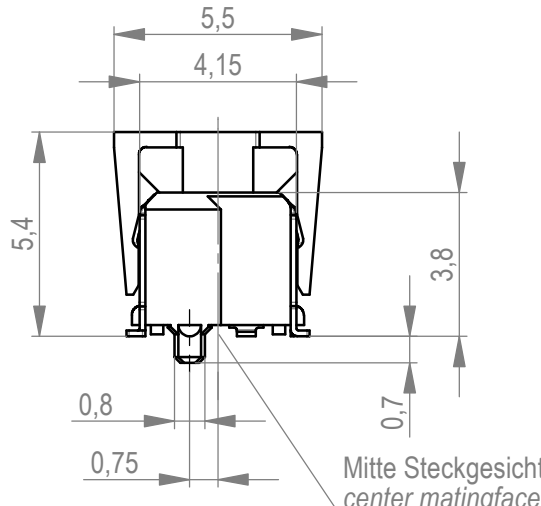
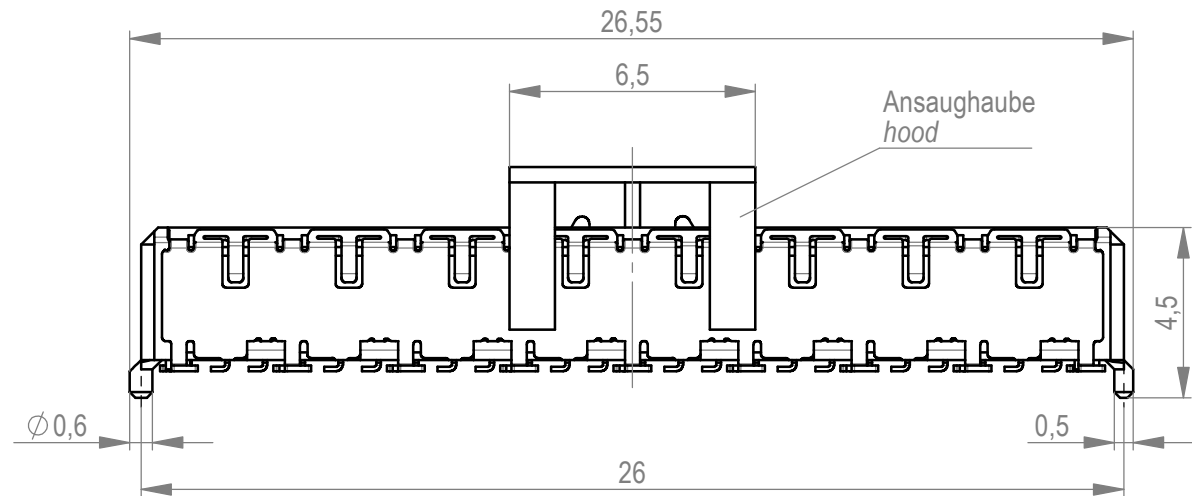





Verpackt im Gurt in Anlehnung an DIN IEC 60286-3
tape on reel packaging according to DIN IEC 60286-3
Verpackungseinheit: 400 Stück
packaging unit: 400 pcs

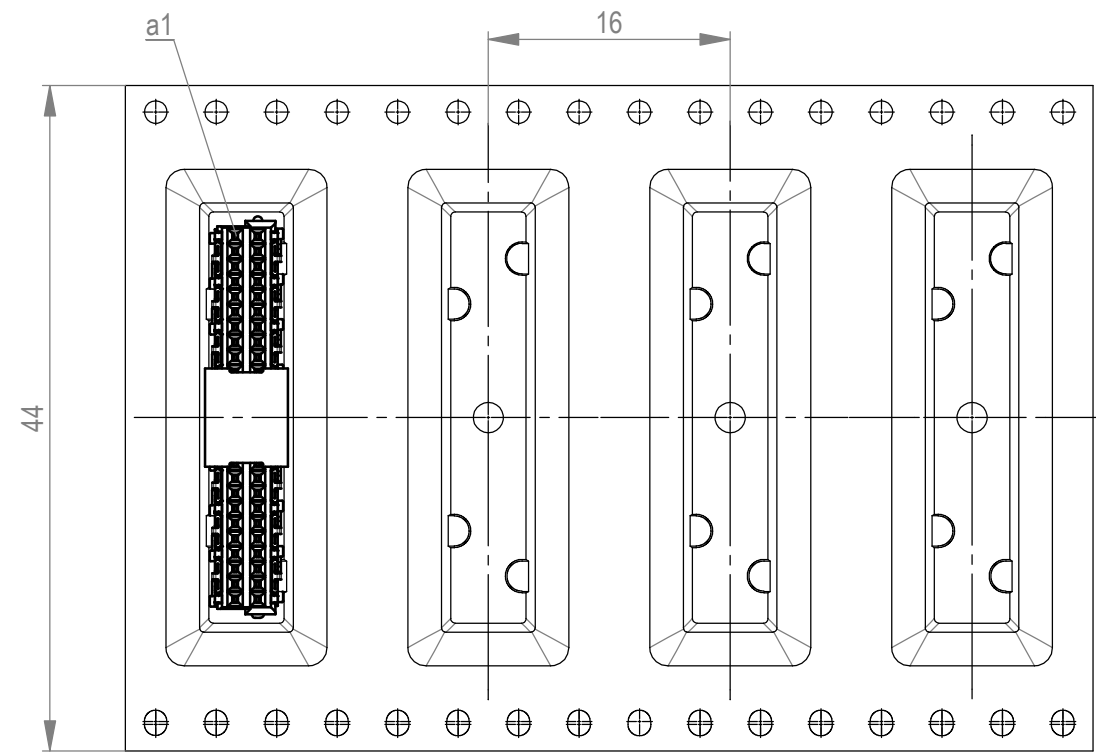

Abspulrichtung - reel off direction

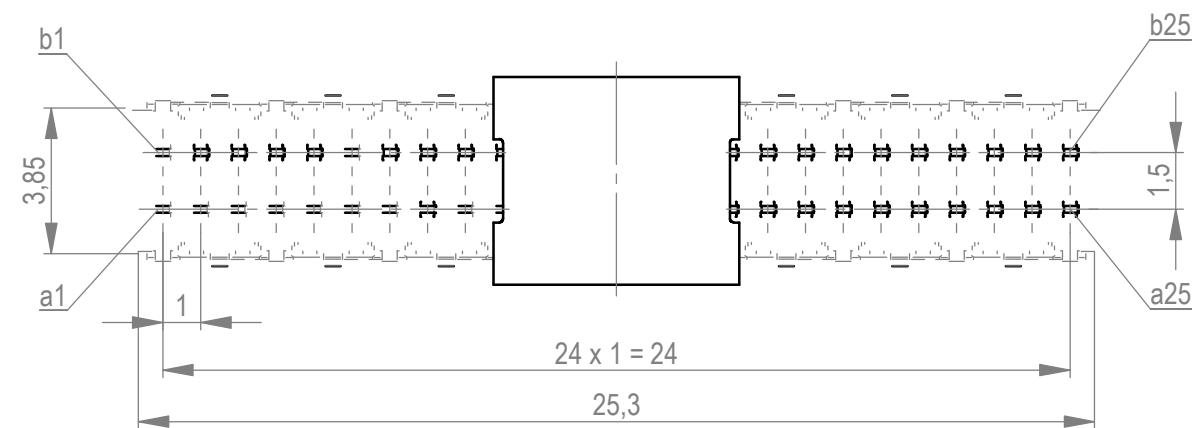

Leiterplatten-Layout Vorschlag / PCB-Layout Proposal

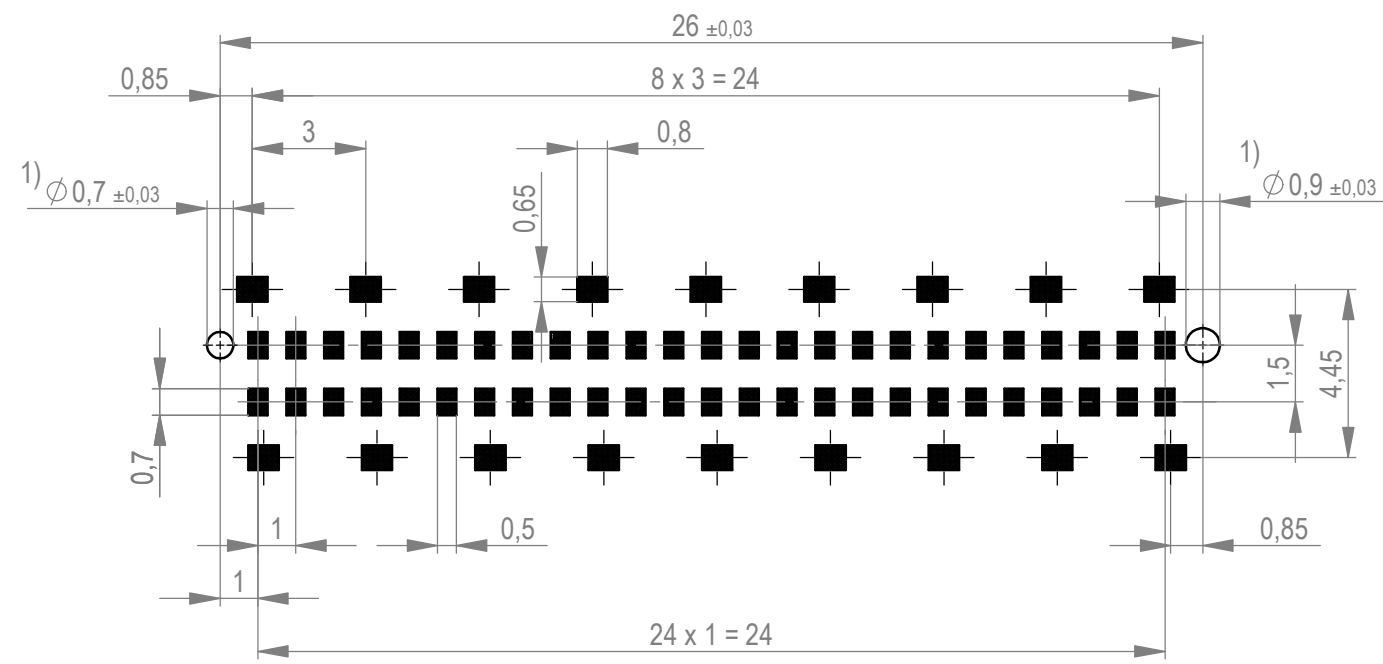


1) Durchmesser des Bohrers / drill tool

Anforderungsstufe 1
performance level 1

Kontaktbereich vergoldet
mating area gold plating

Anschlussbereich verzinnt 2-6 µm
terminal area 2-6 µm tin plating

Koplanarität der Anschlüsse ≤ 0,1 mm
coplanarity area of termination ≤ 0,1 mm

Dimension no.				Tolerances				Scale 5:1			
				Dim. for Information ISO 8015		All Dimensions in mm		Material			
<u>Customer drawing:</u> All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.				Subject to modification without prior notice. Drawing will not be updated.				Female Straight 04mm SMT 50p Standard 2row 144662			
						ERNI International AG Zürichstrasse 72 8306 Brüttisellen - Zürich Switzerland				I	
k				17.06.2021						A3	
Index				Date				Class		MSPEED	