


10	9	8	7	6	5	4	3	2
MATERIAL NO.	ENGINEERING NO.	FINISHED LENGTH						
1200652213	804000A14M010A	3' 4" +2.19-0 (1M +55.6mm-0)						
1200652223	804000A14M020A	6' 7" +3.50-0 (2M +88.9mm-0)						
1200652224	804000A14M030A	9' 10" +3.50-0 (3M +88.9mm-0)						
1200652220	804000A14M050A	16' 5" +6.50-0 (5M +165.1mm-0)						
1200652225	804000A14M100A	32'10" +12.50-0 (10M +317.5mm-0)						

CUSTOMER PRODUCTION APPROVAL
 APPROVED BY: _____
 DATE: _____
 MUST BE SIGNED AND RETURNED BEFORE
 PRODUCTION WILL BEGIN.

RESTRICTED SALES DRAWING

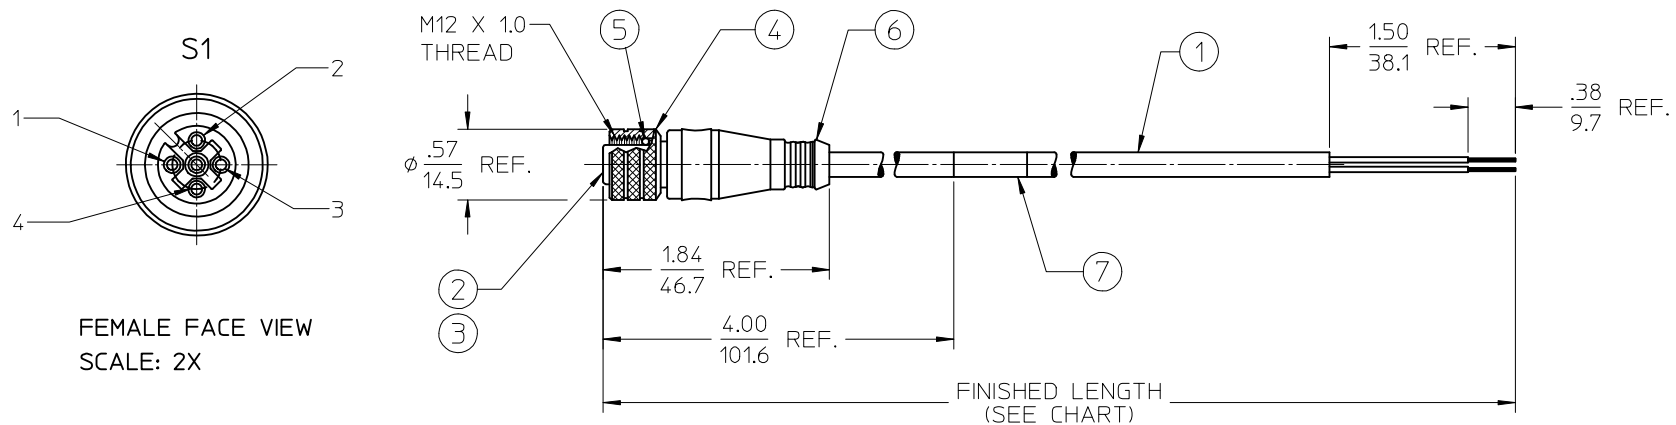


FEMALE FACE VIEW
 SCALE: 2X

S1	
1	BROWN
2	WHITE
3	BLUE
4	BLACK

WIRING DIAGRAM

- NOTES:
1. MATERIAL: SEE TABLE
 2. FINISHES: SEE TABLE
 3. ELECTRICAL SPECIFICATIONS
 VOLTAGE RATING: 250V AC/DC
 CURRENT RATING: 4 AMPS
 4. PROTECTION: IP67
 5. ASSEMBLY IS RoHS COMPLIANT
 BY EXEMPTION

RELEASED AS SD DOC WAS RSD-120065-110 EC NO: IPG2013-1249 A DRWNR: RSTONE 2013/02/12 CHKDK: JOZWIK 2013/02/27 APPR: JFMURPHY 2013/06/21					DESCRIPTION REV	QUALITY SYMBOLS ▽=0 ◻=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 2:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION 	
7	1	WRAP LABEL	VINYL	BLACK/YELLOW			mm INCH		DRAWN BY RSTONE	DATE 2013/02/12	TITLE MIC CABLE ASSY, FEMALE 4 POLE , 22/4 PLTC			
6	1	OVERMOLD-FEMALE	PVC	GRAY			4 PLACES ± --- ± ---	3 PLACES ± --- ± ---	CHECKED BY K JOZWIK	DATE 2013/02/27				
5	1	O-RING	VITON	RED			2 PLACES ± --- ± .01	1 PLACE ± 0.3 ± ---	APPROVED BY JFMURPHY	DATE 2013/06/21				
4	1	COUPLING, FEMALE THREAD	BRASS	NICKEL PLATED			0 PLACE ± --- ± ---	ANGULAR ± 2 °		MATERIAL NO.			DOCUMENT NO. SD-120065-062	SHEET NO. 1 OF 1
3	4	CONTACT SOCKET	Cu ALLOY	GOLD PLATED			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART					
2	1	INSERT, 4P FEMALE	PUR	BLACK			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							
1	1	CABLE, 22-4, 300V, 105°C, PLTC	PVC JACKET	GRAY										
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH										