







MATERIALS AND FINISHES:

BODY: STAINLESS STEEL
PLATED: PASSIVATE


CENTER CONTACT: BERYLLIUM COPPER
PLATED: GOLD (50μ-in) MIN
OVER NICKEL (100μ -in) MIN

INSULATOR: PTFE


SCREW: STAINLESS STEEL
PLATED: PASSIVATE

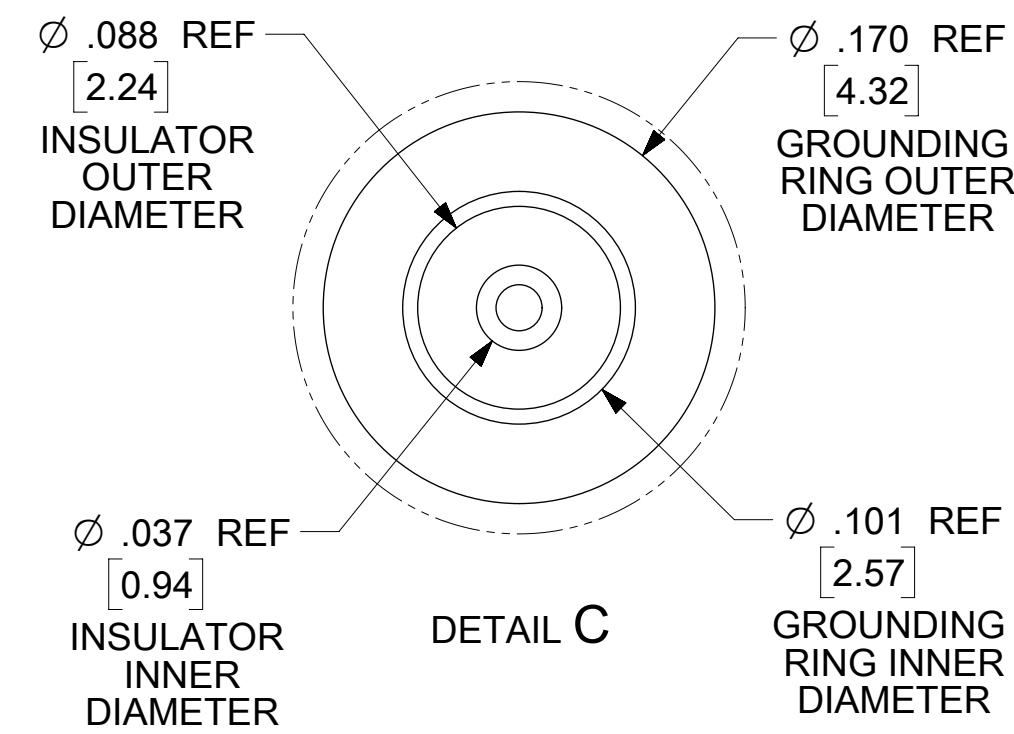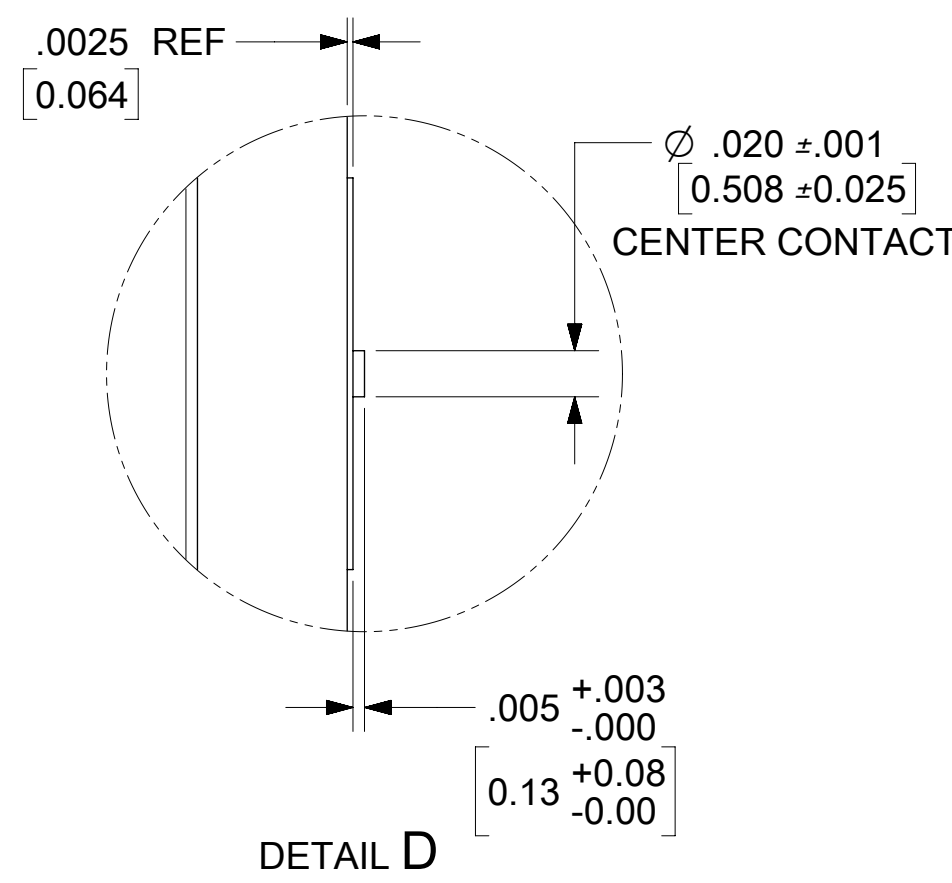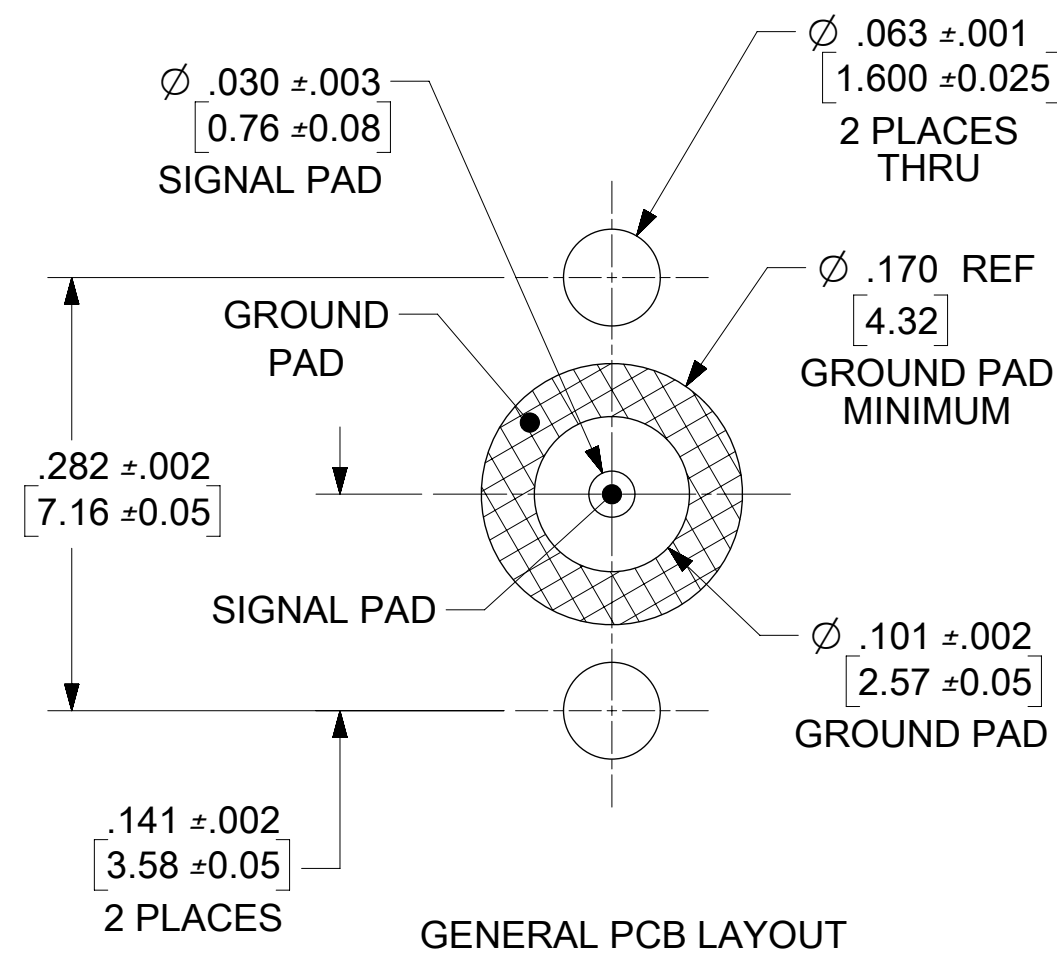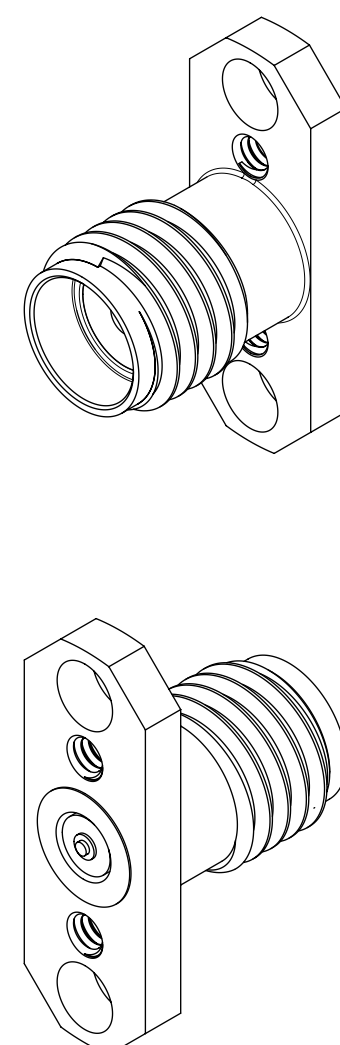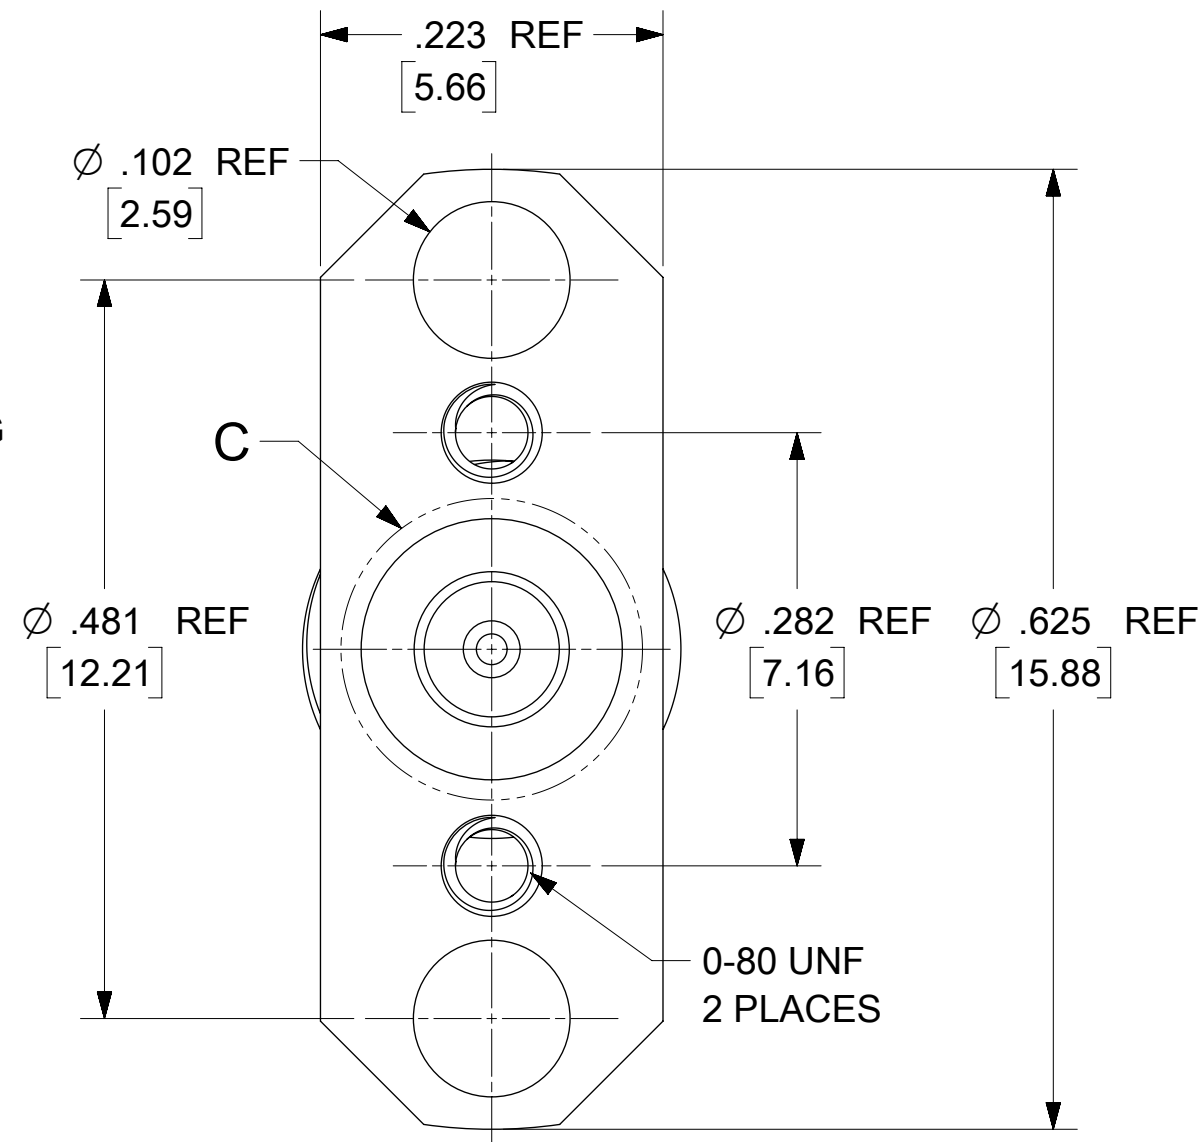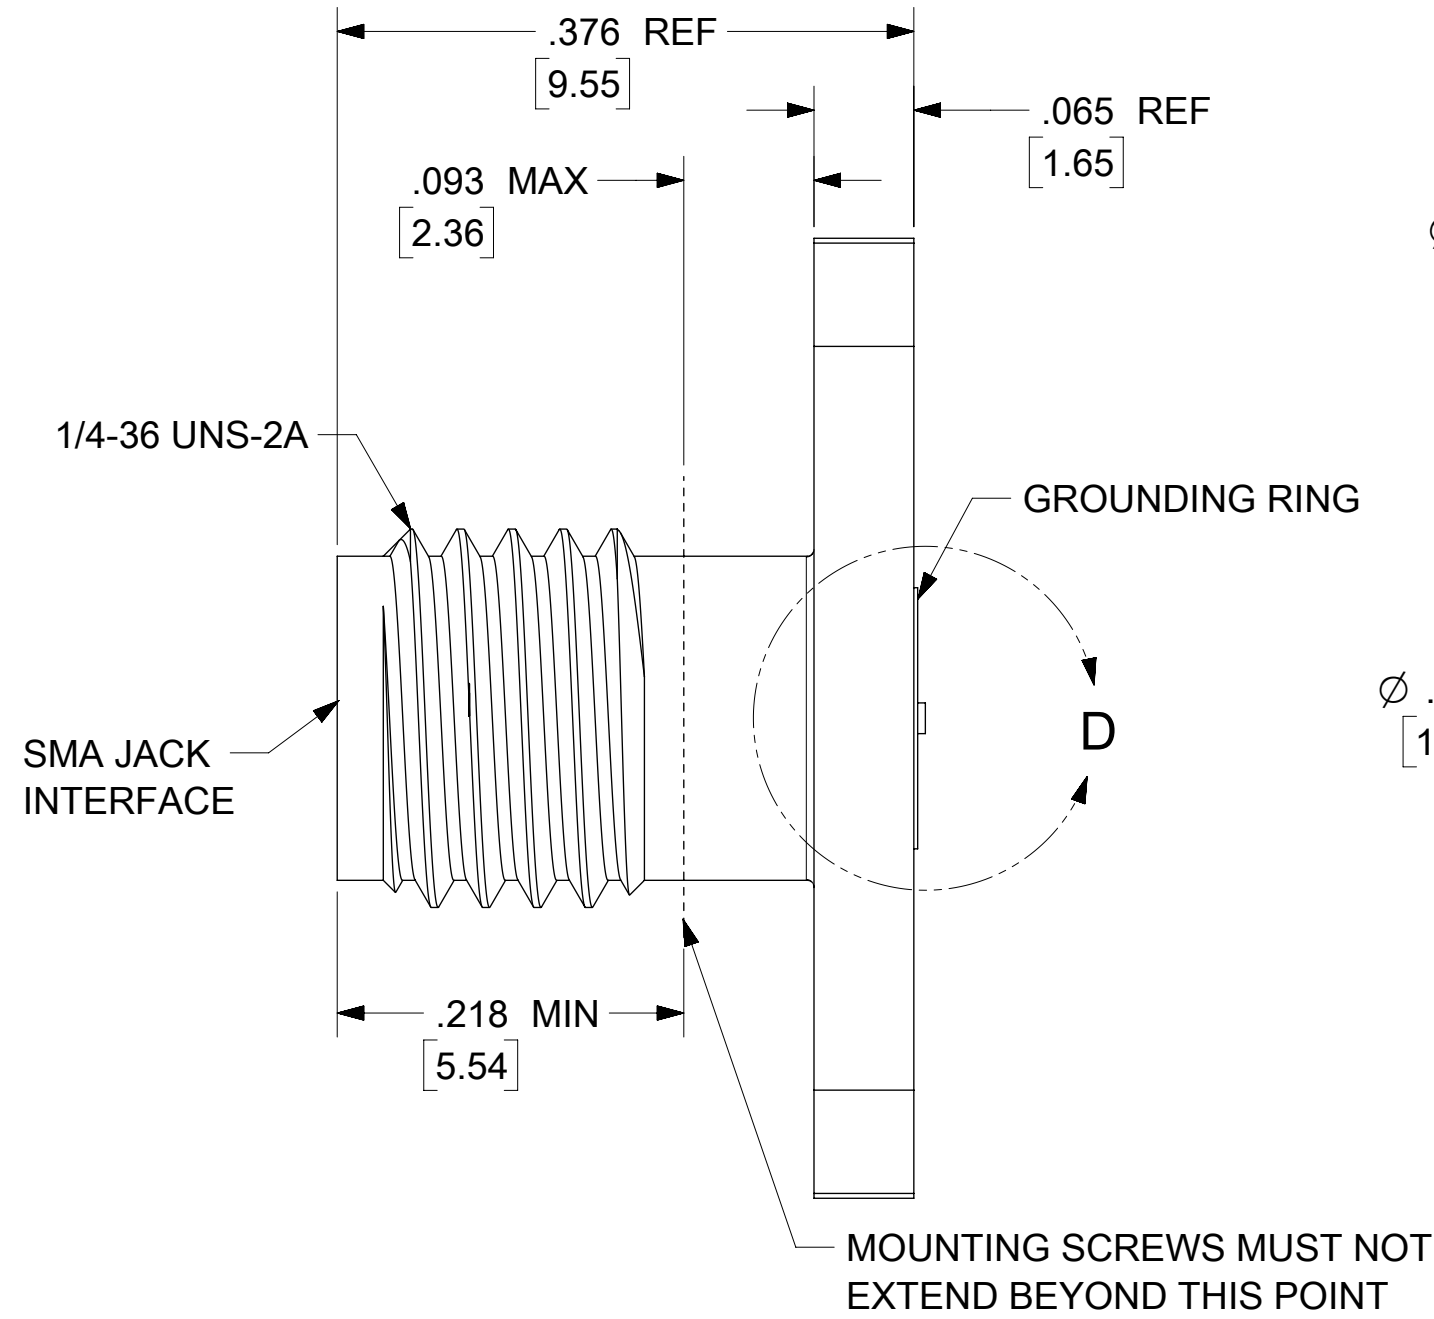

SEE SHEET 2 FOR PART NUMBERS	
PS-89675-3460	ELECTO/MECH PERFOR
MIL-STD-348B, FIG 310-2	INTERFACE
SPECIFICATION	DESCRIPTION

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
DIMENSION UNITS		SCALE		CURRENT REV DESC: SEE ECM 117632	molex				
INCH									
GENERAL TOLERANCES (UNLESS SPECIFIED)					EC NO: 174360 DRWN: PSWAMI02 2018/04/04 CHK'D: PSWAMI02 2018/04/04 APPR: AROBERTSON 2018/04/04	SMA JACK, 2H FLG WITH 0-80 THD, 50 OHM 27 GHZ SMA-JR/F, EWR-10959-A			
	MM	INCH							
4 PLACES	±	±		PRODUCT CUSTOMER DRAWING					
3 PLACES	±	±							
2 PLACES	±	±		DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION	
1 PLACE	±	±		SD-73251-185		PSD	000	B21	
0 PLACES	±	±							
ANGULAR TOL				±	°				
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION	DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER	SHEET NUMBER
					C-SIZE	73251	SEE TABLE		1 OF 3

DOCUMENT STATUS	P1	RELEASE DATE	2018/04/04	13:36:29
-----------------	----	--------------	------------	----------

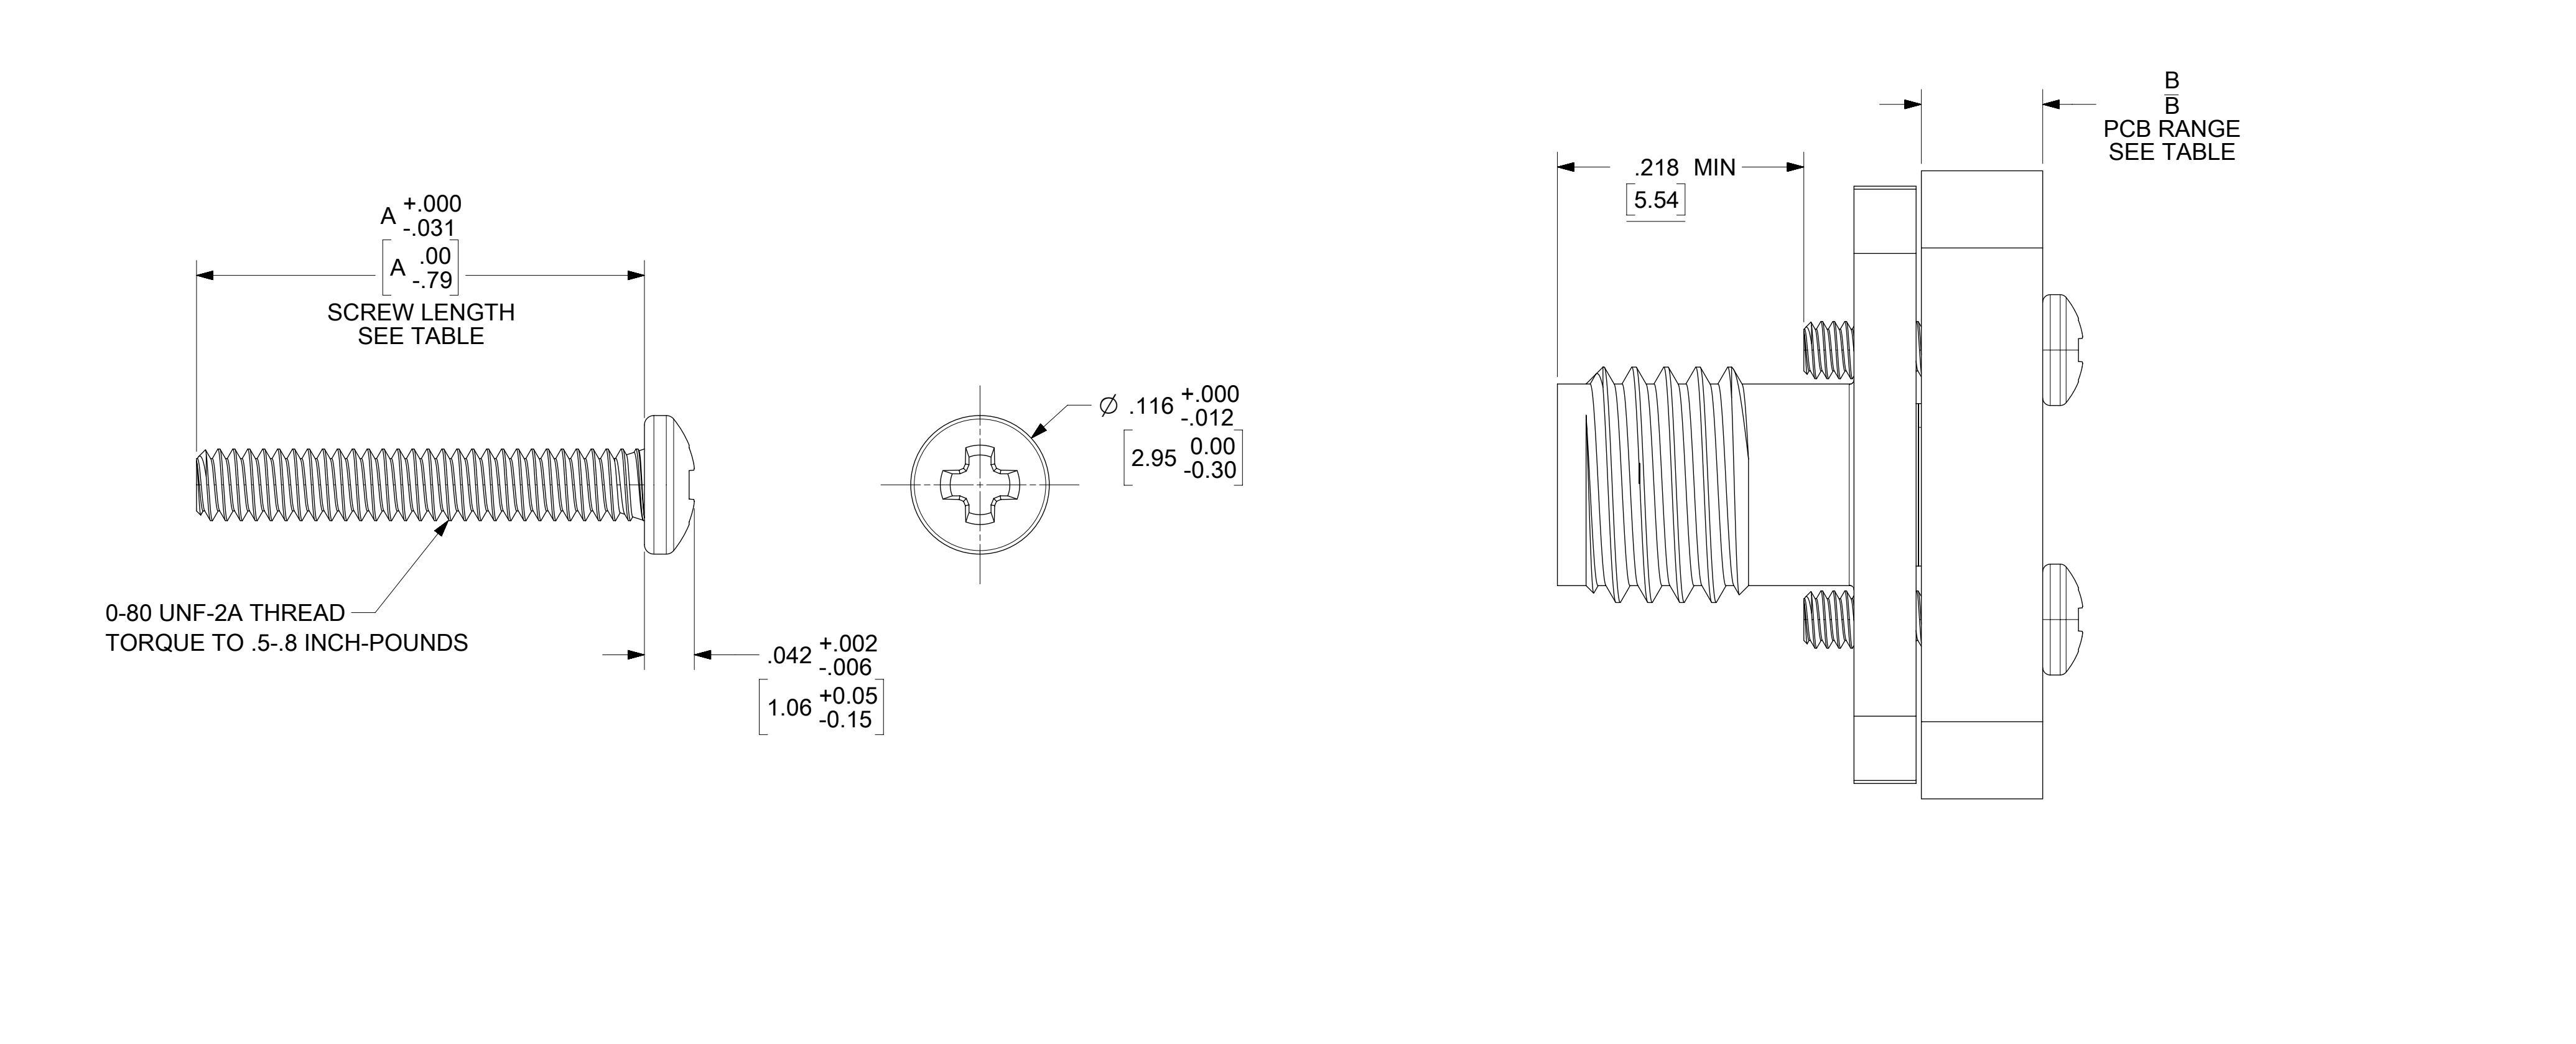

73251-1856	4.76 / .188	.062+.040/- .01	1.57+1.02/- .25	2	SINGLE BAG	IN BAG
73251-1855	3.18/ .125	.050+.00/- .040	1.27+0.00/-1.02	2	TRAY	BULK
73251-1854	9.53/ .375	.255+.040/- .02	6.48+1.02/- .51	2	TRAY	BULK
73251-1853	6.35/ .250	.130+.040/- .02	3.30+1.02/- .51	2	TRAY	BULK
73251-1852	N/A	N/A	N/A	NO SCREW	SINGLE BAG	NONE
73251-1851	4.76/ .188	.062+.040/- .01	1.57+1.02/- .25	2	TRAY	BULK
73251-1850	N/A	N/A	N/A	NO SCREW	TRAY	NONE
PART NO.	(MM/IN)	IN	MM	SCREWS (QTY)	PACKAGING	SCREW PACKAGING
	DIM A	DIM B				

