
| Rev | AWO # | Description | Date | Appr |
|---|---|---|---|---|
| - | | RELEASED | 11/11/08 | |
| A | | REVISED SHAPE | 11/18/10 | |
| B | | REVISED COLOR | 5/27/11 | |

APPROVED: _____

DATE: _____ TITLE: _____

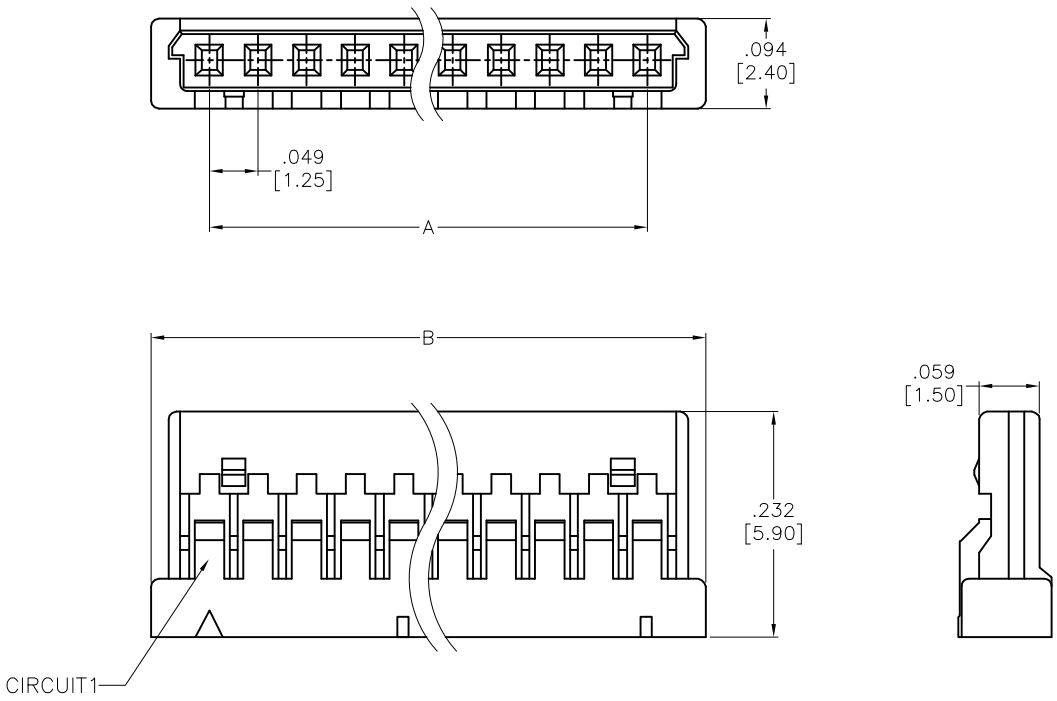


Positions: 2 thru 10, 12, 15, 20, 25, 30
A =.049 [1.25] X No. of positions −1
B =.049 [1.25] X No. of positions + .077 [1.95]

**SPECIFICATIONS:**
Material:
Insulator: Nylon 66, rated UL 94V−0
Insulator color: Beige
**Electrical:**
Voltage rating: 100V AC/DC
Current rating: 1A AC/DC max
Insulation resistance: 500 Mohms min
Dielectric withstanding voltage: 500 VAC for 1 minute
**Temperature Rating:**
Operating temperature: −25°C to +85°C
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

| INCHES | | HOLES | |
|---|---|---|---|
| .X | ± .10 | Ø.X | ±.10 |
| .XX | ± .020 | Ø.XX | ±.015 |
| .XXX | ± .015 | Ø.XXX | ±.010 |

| APPROVALS | | DATE |
|---|---|---|
| DRAWN | SS | 11/11/08 |
| CHECKED | | |
| APPROVED | | |

**ADAM TECH**
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: 1.25mm CRIMP HOUSING SINGLE ROW
2 THRU 30 POSITIONS, COLOR: BEIGE

| SIZE | PART NO. | REV. |
|---|---|---|
| X | 125CH-D-XX | B |

REF: S00123T | SCALE: NTS | SHEET 1 OF 1