



MOUNTING LAYOUT

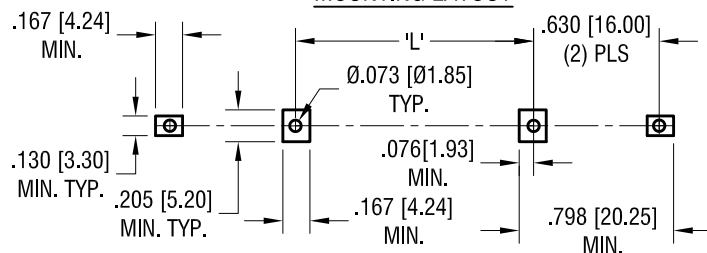




BATTERY	'L'
CR123A	.270 [6.85]
18350	.324 [8.23]
18650 *	1.584 [40.23]
17500	2.175 [55.23]

* FOR BATTERIES WITH
BUILT-IN CIRCUIT PROTECTION
(67mm LONG)

ACTUAL SIZE



DETAIL 'A'

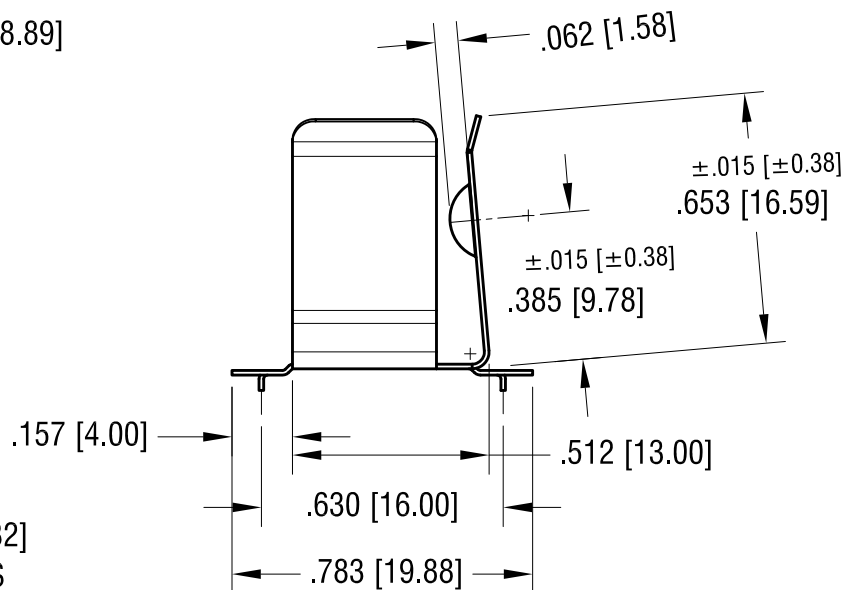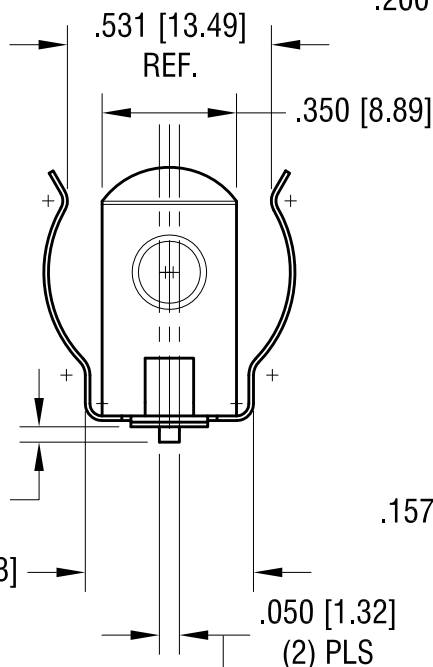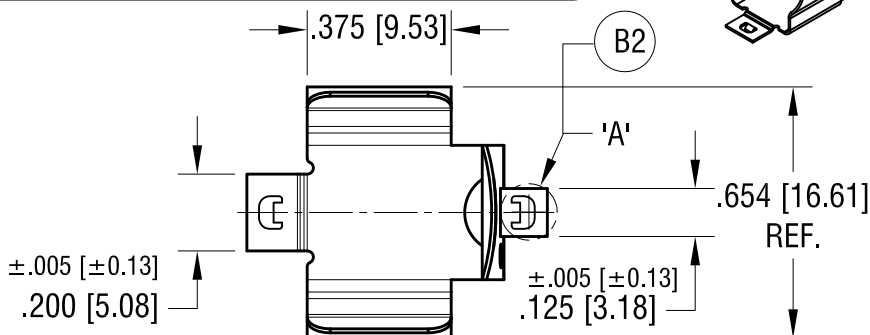

NOTE:

1. HEAT TREAT TO SPRING TEMPER

PCB PROTECTION CIRCUITS ARE REQUIRED
WHEN USED WITH LITHIUM-ION BATTERIES

KEYSTONE ELECTRONICS CORP.

www.keyelco.com • NEW HYDE PARK, NY 11040 • Tel (516) 328-7500

PART NAME

16mm - 19mm SM BATTERY CLIP

MATERIAL

.012 [0.30] TH'K ANNEALED SPRING STEEL

FINISH

TIN NICKEL PLATE

DRN BY

NT

DATE

1.17.18

APP'D

LN

SCALE

2X

TOLERANCES

INCH

[MM]

DECIMAL

±.010 [±0.25]

ANGULAR

± 2°

UNLESS OTHERWISE SPECIFIED

CODE

DWG NO.

C

254

8.15.22

B1 WAS .060, ADD RELIEF B2
CHANGE AS PER ECN 22-141

B

6.14.21

REMOVE HOLE FOR WIRE
CHANGE AS PER ECN 21-053

A

DATE

DESCRIPTION

REV.