

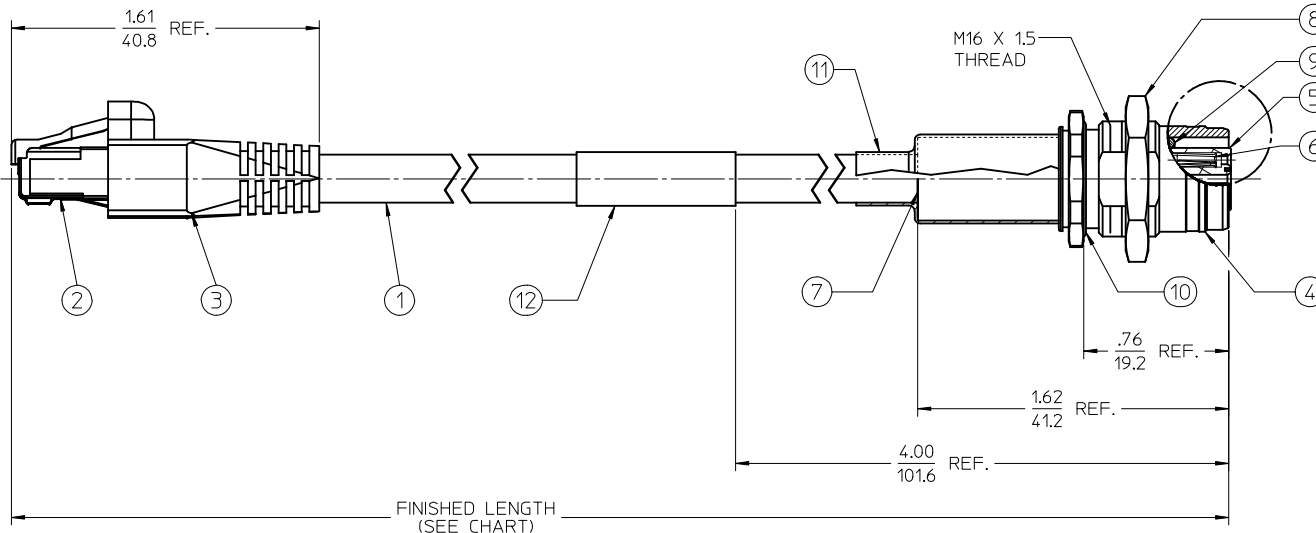

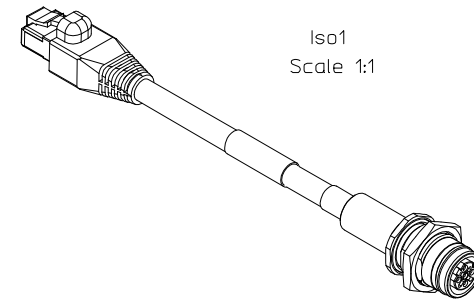


13	12	11	10	9
MATERIAL NO.	ENGINEERING NO.	FINISHED LENGTH		
1201090006	ERWPAU7005M010	3' 3" +2.19/-0 (1M +55.6mm-0)		
1201090007	ERWPAU7005M020	6' 7" +3.50/-0 (2M +88.9mm-0)		

PANEL CUTOUT



NOTES:

1. MATERIAL: SEE TABLE
2. FINISHES: SEE TABLE
3. ELECTRICAL SPECIFICATIONS
VOLTAGE RATING: 150V AC/DC
CURRENT RATING: 1.5 AMPS
4. PROTECTION: IP67
5. ASSEMBLY IS RoHS COMPLIANT BY EXEMPTION

RJ-45 M16 FEMALE

1	WHITE/ORANGE	1
2	ORANGE	3
3	WHITE/GREEN	2
6	GREEN	4

WIRE DIAGRAM

12	1	WRAP LABEL	VINYL	BLACK/YELLOW
11	1	SHRINK TUBE-CONDUCTIVE	POLYOLEFIN	BLACK OR SILVER
10	1	PANEL MOUNT O-RING	NITRIL	BLACK
9	1	MATING O-RING	VITON	RED
8	1	PANEL NUT	BRASS	NICKEL PLATED
7	1	CABLE SLEEVE	BRASS	NICKEL PLATED
6	4	CONTACT SOCKET	Cu ALLOY	GOLD PLATED
5	1	INSERT, FEMALE, 4P	PUR	BLACK
4	1	RECEPTACLE SHELL,U-LOCK, M16	BRASS	NICKEL PLATED
3	1	RJ-45 BOOT	POLYOLEFIN	BLACK
2	1	RJ-45 PLUG	POLYCARB/Cu ALLOY	CLEAR/GOLD PLATED
1	A/R	RJ-45 CABLE. 26/4, SHLD	TPE JACKET	TEAL
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH

NEW SALES DRAWING
EC NO: IPG2013-1402
DRAWN BY: DRWNRSTONE 2013/03/11
CHKD BY: JOZWIK 2013/03/15
APPR: JFMURPHY 2013/04/25

REV	DESCRIPTION
1	QUALITY SYMBOLS ▽=0 ▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)
4 PLACES ± --- ± ---
3 PLACES ± --- ± ---
2 PLACES ± --- ± .01
1 PLACE ± 0.3 ± ---
0 PLACE ± --- ± ---
ANGULAR ± 2 °
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE	IN/MM
DRAWN BY	DATE
DATE	2013/03/11
CHECKED BY	DATE
DATE	2013/03/15
APPROVED BY	DATE
DATE	2013/04/25
MATERIAL NO.	SEE CHART
SIZE	C

SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
2:1	INCH	THIRD ANGLE PROJECTION
TITLE		
SHLD ETHERNET CABLE ASSY FEM D-CODE U-LOCK RECEPT TO RJ-45 PLUG, 26 AWG		
molex		
DOCUMENT NO.	SD-120109-014	SHEET NO. 1 OF 1
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		