
PROPRIETARY INFORMATION:
PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK,INC.

REVISION

REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE, RFS. 19994, SO	11/18/10	HM

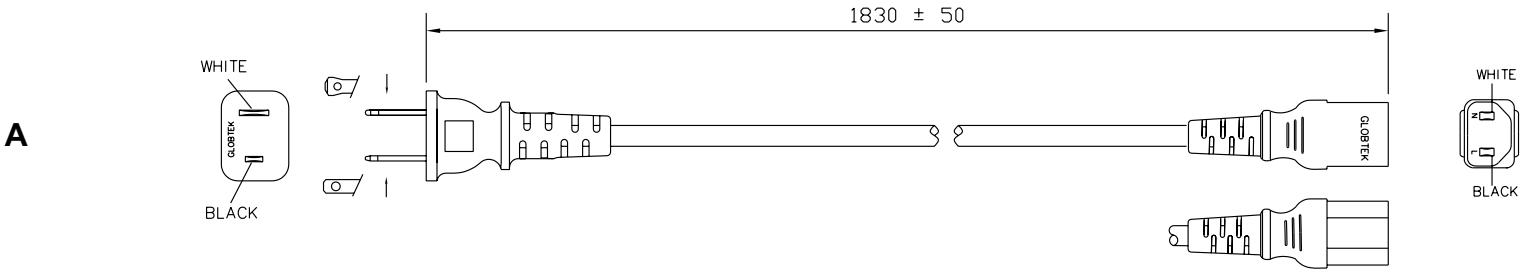


GENERAL SPECIFICATIONS:

RATING:	10A / 125V AC
CABLE TYPE / SIZE:	SJT, 18 AWG X 2C
TEMPERATURE RATING:	60° C
CONDUCTOR COLORS:	BLACK / WHITE
CABLE JACKET COLOR:	BLACK
OVERALL LENGTH (L):	1830 ± 50 mm
CABLE OUTER DIAMETER:	7.8 ± 0.1 mm
END 'A' TERMINATION:	NEMA 1-15P POLARIZED
END 'B' TERMINATION:	IEC 60320 / C17
APPROVALS PLUG:	UL, CSA OR cUL
APPROVALS CABLE:	UL, CSA OR cUL
APPROVALS CONNECTOR:	UL, CSA OR cUL

PACKING:

HANKING



Complies with Restriction of Hazardous Substances
RoHS

NOTES:

1. CORD, PLUG AND CONNECTOR MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S).

OR

2. EACH CORDSET IS PACKAGED IN INDIVIDUAL ZIP-LOCK BAG. BAG DIMENSIONS: 250 X 110 X 0.04 MM.

DASH NO.	PART NO	REV.	DESCRIPTION	NOTES

TABULATION BLOCK

TOLERANCES:
DECIMALS .xx +/- 0.1 .xxx +/- .005 ANGULAR +/- 1°
MILLIMETERS .xx +/- 0.3 .xxx +/- .013 ANGULAR +/- 1°

GlobTek, Inc.
www.globtek.com
186 Veterans Dr. Northvale, NJ 07647
Tel. 201-784-1000 Fax 201.784.0111

INIT.BY: SO	DATE: 11/18/10		DWG TITLE: NORTH AMERICAN DETACHABLE CORDSET		
DRAWN: NF	DATE: 11/18/10	FSCN No.: G, CC	SIZE A	MODEL: N / A	REV. A
APRVD: HM	DATE: 11/18/10	SCALE: NONE		PART NO: **401P1086F071A(R)**	SHEET 1/1

Contents of this document are subject to change without prior notice

Foot Note:
Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applicable UL,CSA or EN Standards for proper installation instruction.

Limitation of Use:
Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.